

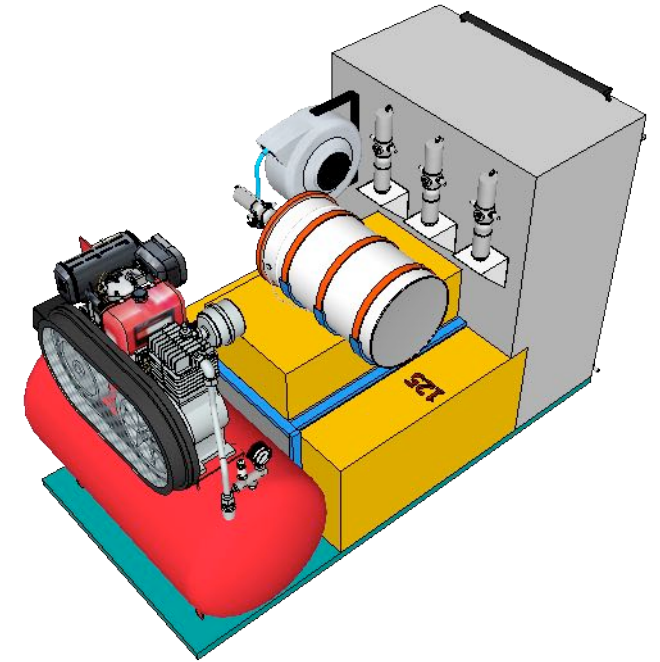
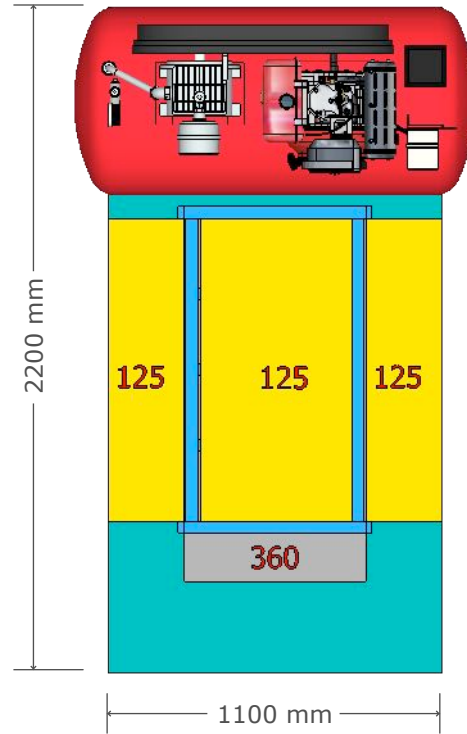
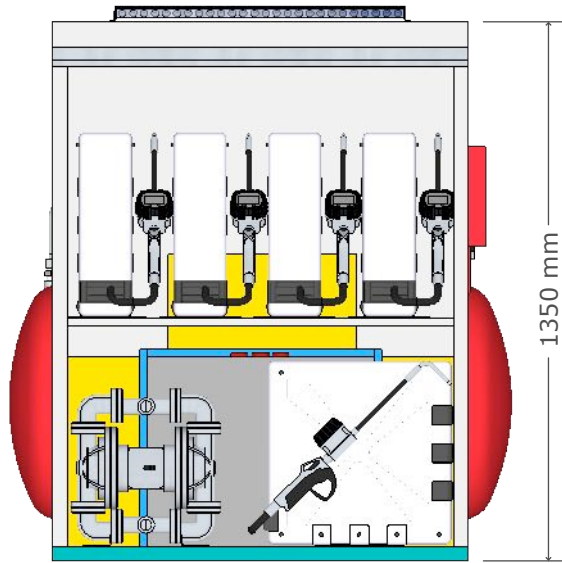



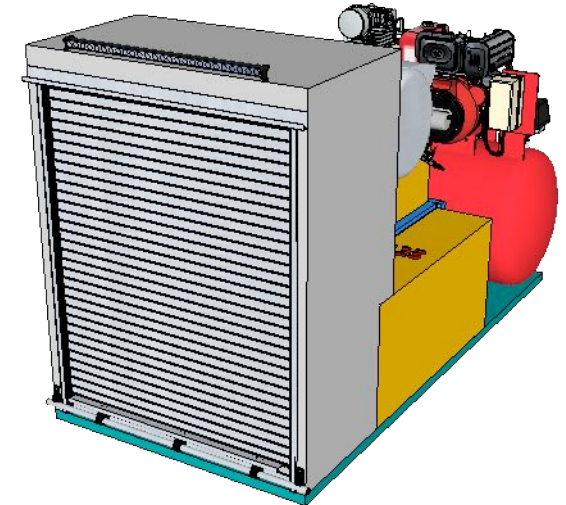




Model:3

Oil Capacity : 375 lt
Waste Oil Capacity : 360 lt

No	Explanation	Pcs	Scale
1	Diesel Compressor 12 bar.	1	
2	Pneumatic Oil Pump	3	
3	Plst. Oil tank	3	125 lt.
4	Oil Reel	3	15 mt.
5	Pneumatic Waste Pump	1	
6	Waste Reel	1	15 mt.
7	Plst. Waste Tank	1	360 lt.
8	Pneumatic Grease Pump	1	50 kg.
9	Grease Reel	1	15 mt.
10	Air Reel	1	20 mt.

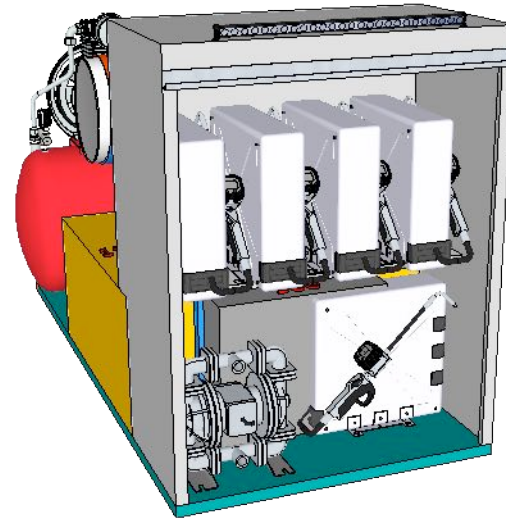

No	Equipment	Explanation	Producer	Orjin	Piece
1	Bodywork	Alura	Turkey	1	
		Model : 3 Chassis: Made from 3 mm profile steel. Lifting Eyes: 4 lifting eyes suitable for crane lifting. Vehicle Connection: Suitable M12 connection points for placing to the vehicle. Isolation: Rubber padding between the vehicle and chassis. Cabin: Aluminum sheet cabin. Paint: Acrylic industrial paint. Sizes L x W x H:1.100x2.200x1.350 mm Curb Weight: 590			
					
2	Aluminum Shutters	Alura	Turkey	1	
		Manuel Working Locking Systems Size : 1000 x 1200 mm 1 pcs.			
3	Compressor Diesel	Setkom	Turkey	1	
		Working Pressure: 12 Bar - 159 PSI Flow - Air: 653 lt/min. - 39.18 m³/h. Air Generator: Abac 5900 Air Tank: 300 lt. Dimensions: 1700 x 550 x 1200 mm Weight: 165 kg	KATANA 4-stroke, single cylinder. Maximum Output Power: 8 Hp Battery Voltage: 12 V. - 60 AH Continuous Output Power: 7.2 Hp Starting System: Cord - Starter Cooling System: Air Cooling		
4	Oil Pumps	Raasm	Italy	3	
		Pneumatic pumps for oil Flow rate: 18 l / min Air working pressure: 6/8 bar Average air consumption: 230 l / min Noise level: 81 dB Oil viscosity: 80 SAE			
5	Hose Reels	Raasm	Italy	3	
		Pressure: 150 bar Length: 15 mt Compatible fluids: Oils and Similar Material: Painted Steel Inlet-Outlet : G 1/2 ""f - G 1/2 ""m Pressure - Size: 1/2 "" - 160 bar			

No	Equipment	Explanation	Producer	Orjin	Piece
6	Guns for dispensing		Raasm	Italy	3
		Flu: Technopolymer Digital meter: Yes Inlet swivel joint: G 1/2 f Filter: Yes Level locking button: Yes			
7	LDPE Tank 125 lt		Golsan	Turkey	3
		Made from LDPE plastic. Capacity: 125 Lt. 2" Pump Connection. 1" Drain Valve. Colour: Transparent. Dimensions: 500 x 1000 x 250 mm.	With PP 120 mm cover.		
8	Waste Oil / Diagram Pump		Raasm	Italy	1
		Diaphragm Pumps Flow rate: 70 l / min Max pressure: 8 bar. Max cycles for minute: 400 cpm. Max working temperature: 100 ° C Noise level: 70 dB	Air working pressure: 2/6 Bar Membranes: EPDM		
9	Waste Oil / Hose Reel		Raasm	Italy	1
		Pressure: 20 bar Length: 15 mt Compatible fluids: Oils and Similar Material: Painted Steel Inlet-Outlet : G 1/2 ""f - G 1/2 ""m Pressure - Size: 1/2 "" - 160 bar			
10	LDPE Tank 360 lt		Golsan	Turkey	1
		Made from LDPE plastic. Capacity: 200 Lt. 2" Pump Connection. 1" Drain Valve. Colour: Transparent. Dimensions: 600 x 1200 x 500 mm.	With PP 180 mm cover.		
11	Grease Pump		Raasm	Germany	1
		Pressol 50 kg Bucket Air Grease Pump Compression Ratio: 50:1 Working Pressure: 2 – 8 Atu Max:Pressure: 400 Bar Yield: 1.100 g/min. Air Consumption: 400 Lt / min.	Bucket Capacity: 50 Kg.		

No	Equipment	Explanation	Producer	Orjin	Piece
12	Grease Hose Reels		Raasm	Italy	1
		Pressure : 400 bar Compatible fluids : Grease ø and hose length : 3/8 - 25 mt. Swivel joint : Zinc plated steel Seals : Polyurethane Characteristic : Fixed	Material : Painted Steel Couplings : Zinc Plated Steel length Reel flow path : Zinc Pated Steel Internal drum width : 122 mm		
13	Air Hose Rell		Mavel	Turkey	1
		Hose Length: 20 Mt Hose Diameter : 10x15mm Hose Pressure : 15 bar Input Output Dimen: 3/8" F - 3/8" M Auto Rewind Plastic outer cover	Steel swivel wall bracket It can be easily stopped by the end user thanks to the latch stop device. CE approved Weight: 8.3 Kg		
32	Air Regulator		Osaka	Japan	1
		Air Inlet : 1/2" Filter : 20u Working Pressure: 05-9.9 atu Operating Temperature: 5-60°C Water Capacity: 80 ml Air Permeability: 2200 lt/min			
35	Outdoor Lighting		CSR	Turkey	1
		Operating Voltage / Current: DC 12/15V 1.4A Driving Type: Linear current and voltage controlled driver Light Source: 3W 12pcs power LED LENS Feature: 25° collimator LENS	White:5000-7000K Physical Properties : Polycarbonate plastic black aluminum profile		