

Technical Specification of 4 Axles Flatbed Trailer (P/I 2425)

Dimensions;

Length : 13.600 mm

Width : 2.550 mm

Chassis : Its made from ST-52 and high resistant "I" cut chassis. 8 mm thickness chassis up and down 14 mm width for the 14 mm 120 mm Plate for intensification from king pin to after legs 180X16 ST 52 steel and both of ends round shape

Axles : 4 OSMAN KOC brand - Drum brake axles / 4th axle is self steering axle

Suspension : Steel suspension on the 4 axles /

Brake system : 2 line - Air Brake system

King-pin : OMS brand 2"

Landing Legs : 24 ton double speed mechanic landing legs and it has TUV certificate. Air spring heavy duty type.

Twist locks : 12 units twist lock and they have TUV certificate. 12 units twist locks for 1 unit 40" container or 2X20" container or 1X20" container on the middle of container chassis.

Wheel and tyres : 385 65 R 22.5 Bridgestone brand 8+1 units tyres and rims with TUV certificate


Side Pillars : 8 pcs each side with 1000 mm height

Electrical System : SA-BA brand (ADR) electrical system with side lamps led every 2.5 Meter – It has ADR certificate Connectors 15 and 7 pin – 2 unit stop lamp by 7 functionally shall be covered with cage installed by bolts. 2 units import plate illumination lamp. Reflectors and velocity plates (with red and white crosses) Rear lamps have steel protection and it can be opened and closed. Rear side lamps will be placed top of bumper. All cables will be hold by cable-holder

Paint : Epoxy and paint with RAL code and logo & accessories will be RAL no:

Accessories :

☐ 2 units projectors ☐ Front wall height 1200 mm ☐ Cable holders ☐ Lashing rings at rear ☐ Ro-ro rings ☐ Bumper and number plate frame. ☐ Spare tyre frame with locking system	☐ Toolbox ☐ Water tank ☐ 8 units mudguards ☐ Fire extinguisher box ☐ Small box for licenses ☐ 2 units rubber chocks at the rear of trailer ☐ Buzzer on the bumper
---	--

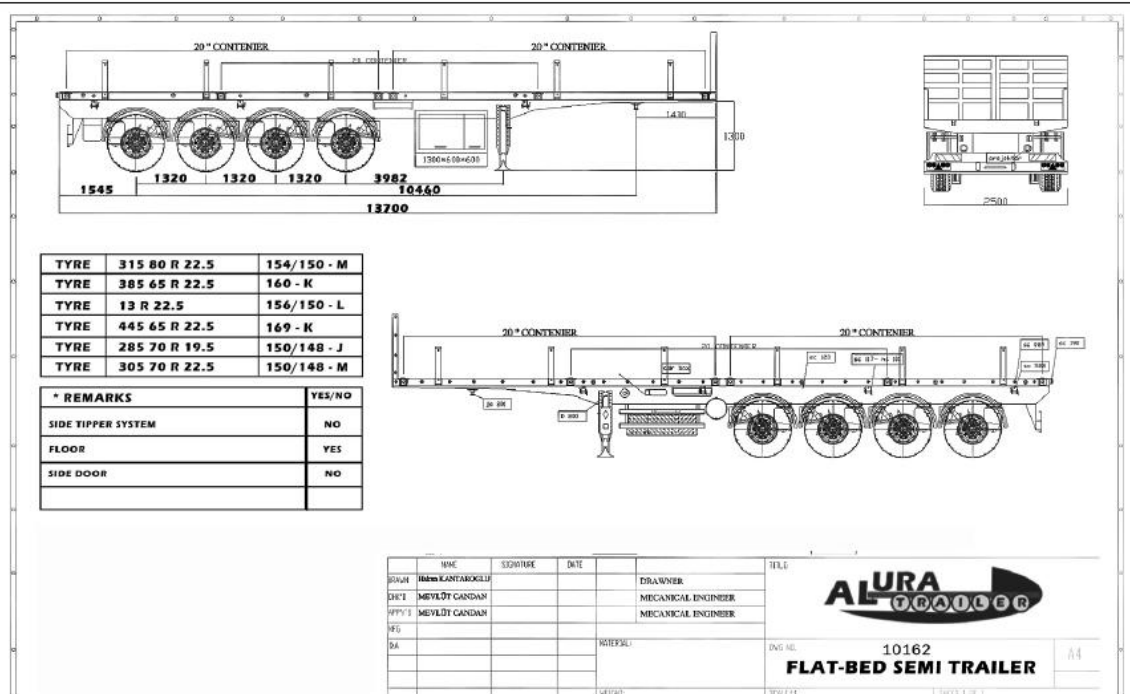

SAMPLE PHOTOS:

