



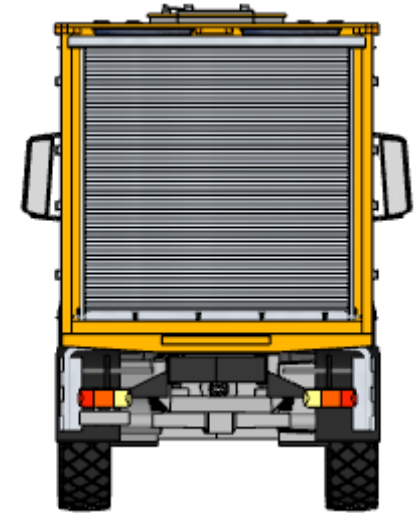

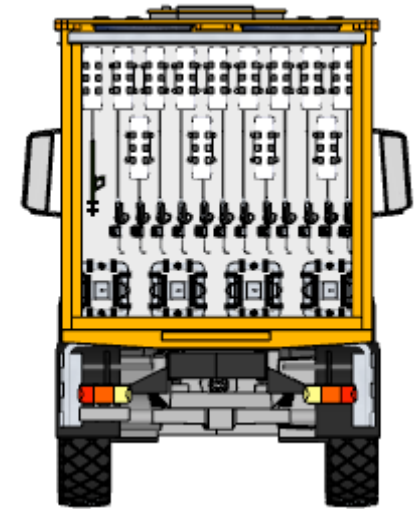

Pressure
Washer
Diesel Fuel
System

Hydraulic
Oil Tank
4.000 lt.


Waste
Hydraulic
Oil Tank
4.000 lt

Engine
Oil Tank
4.000 lt

Coolant
Tank
1.000 lt

Oil SAE 30
Tank
1.000 lt

2x
Grease &
Pump
185 kg

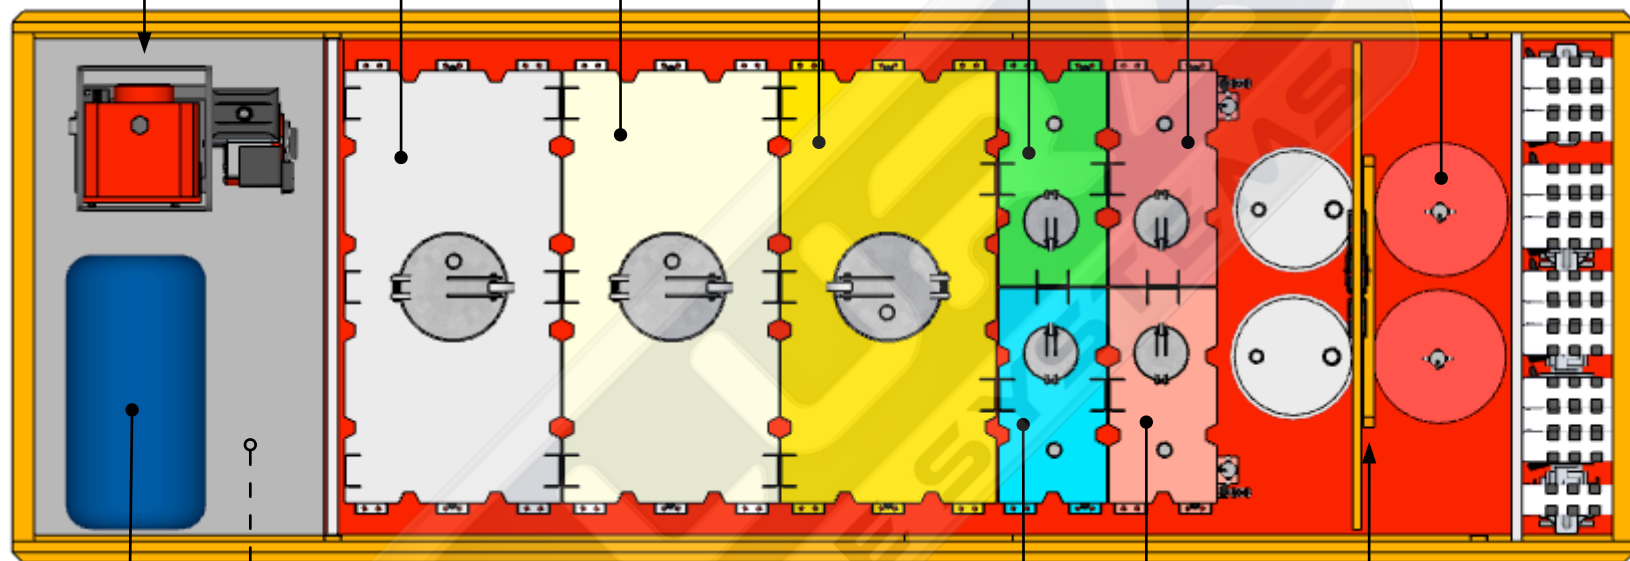


Air Tank
250 lt

Air Compressor
Diesel Fuel System

Water
Tank
1.000 lt

Oil SAE 50
Tank
1.000 lt


Crane

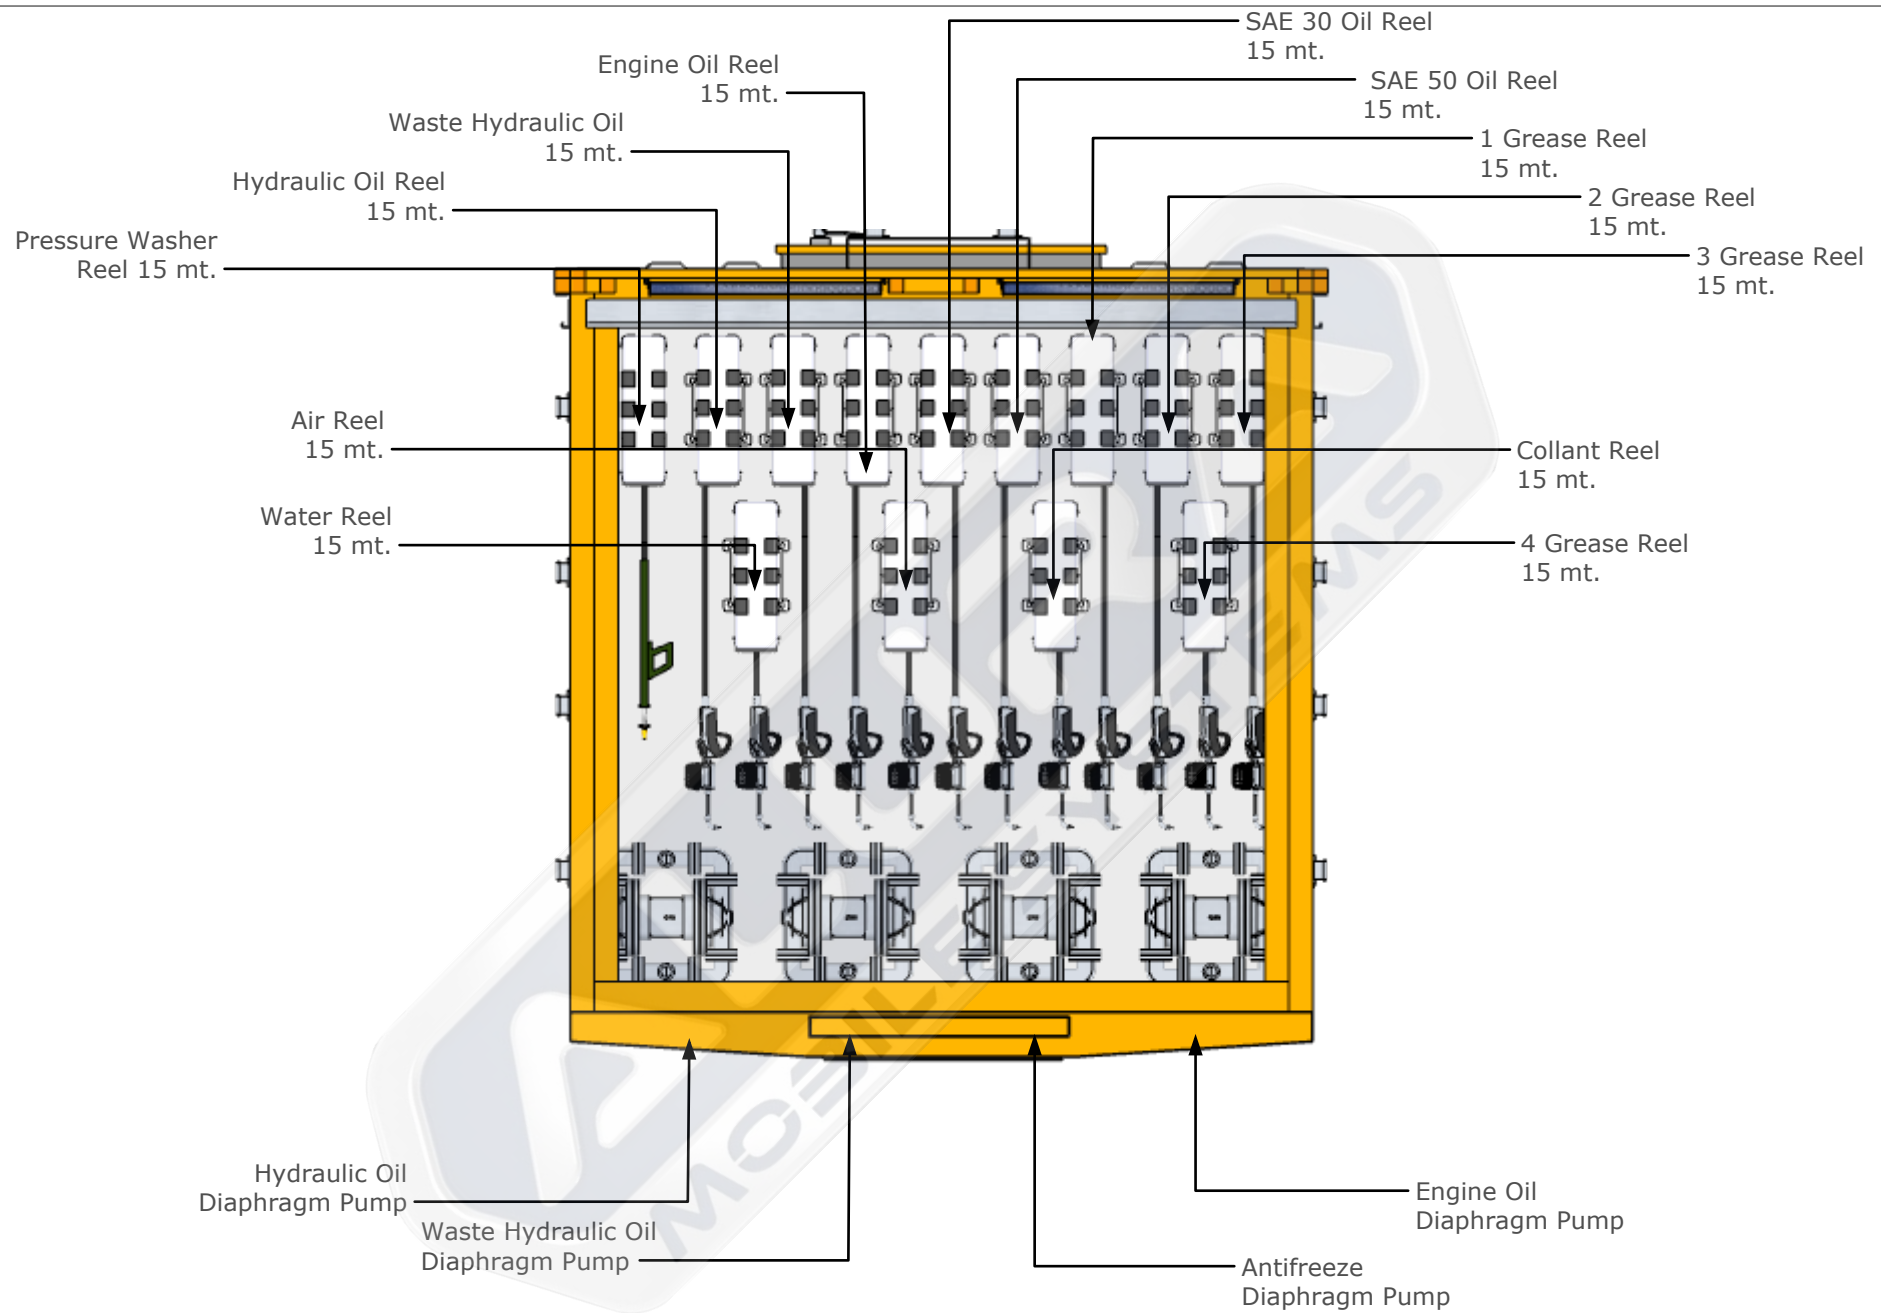











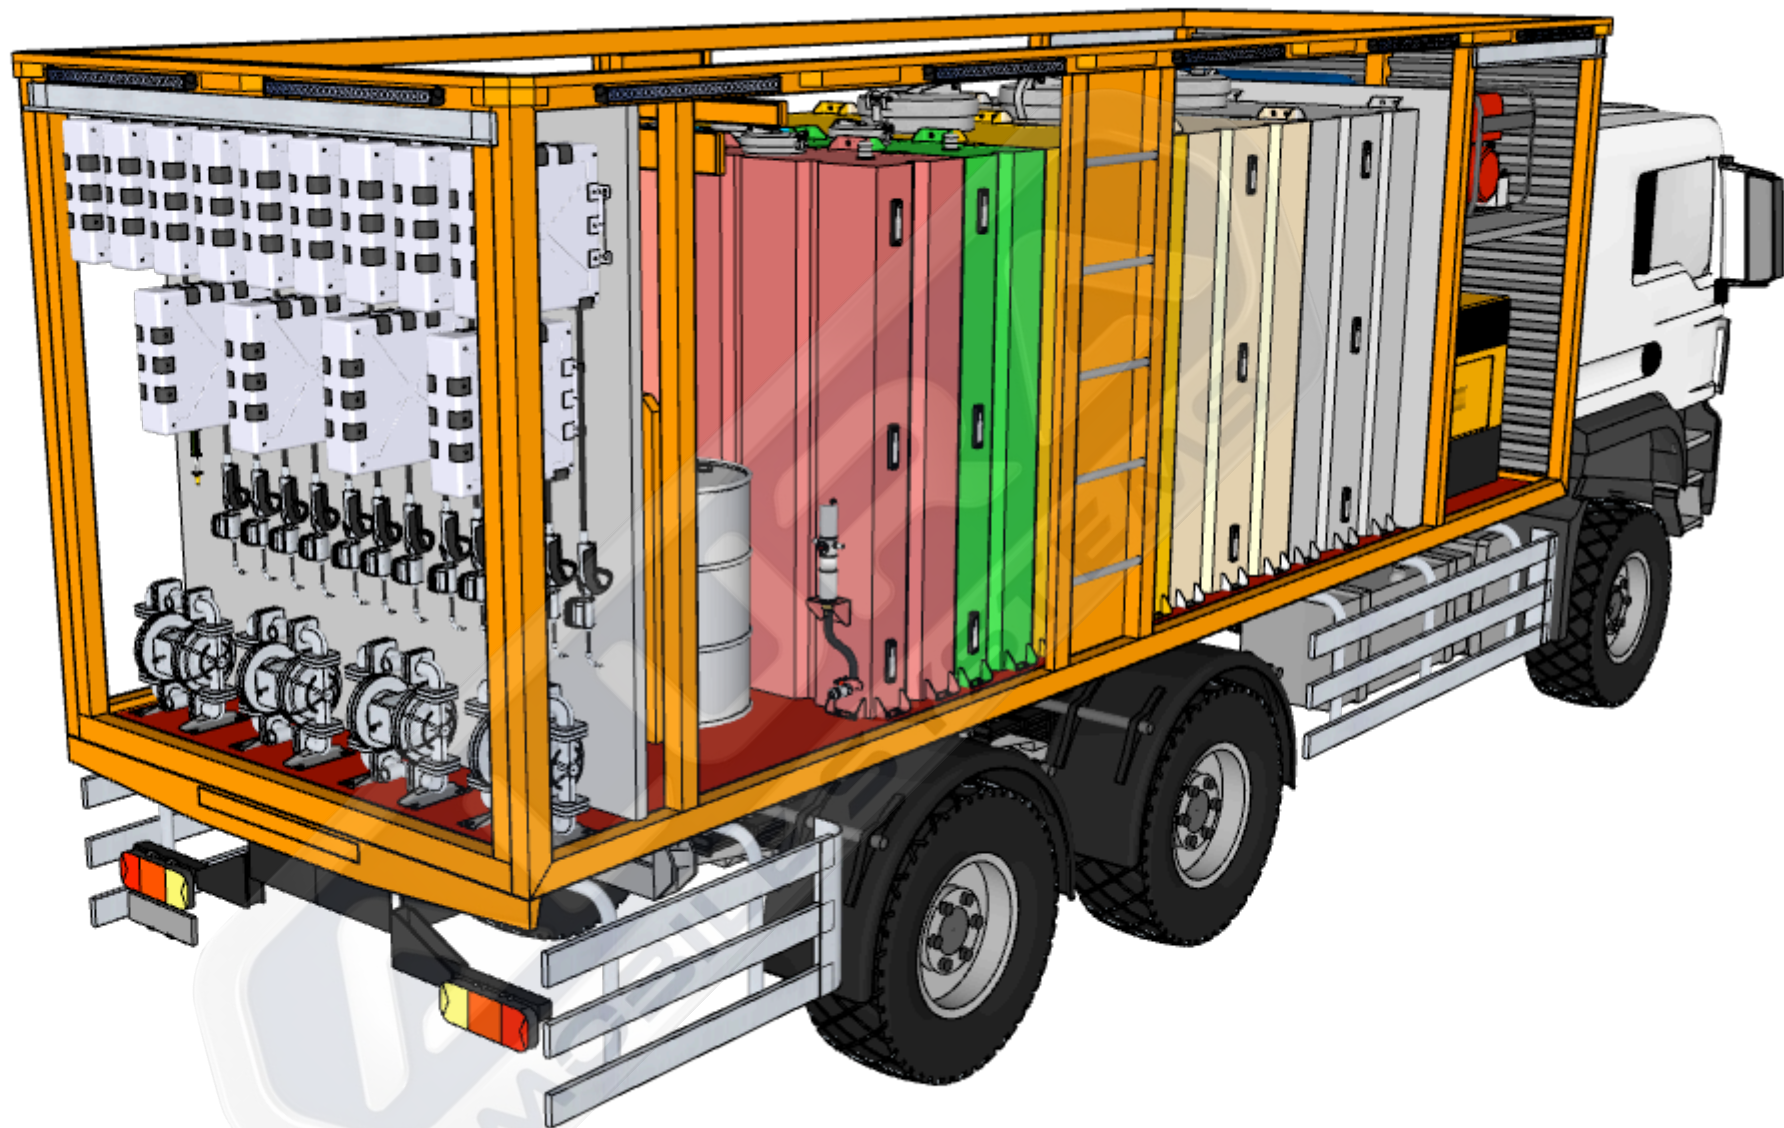



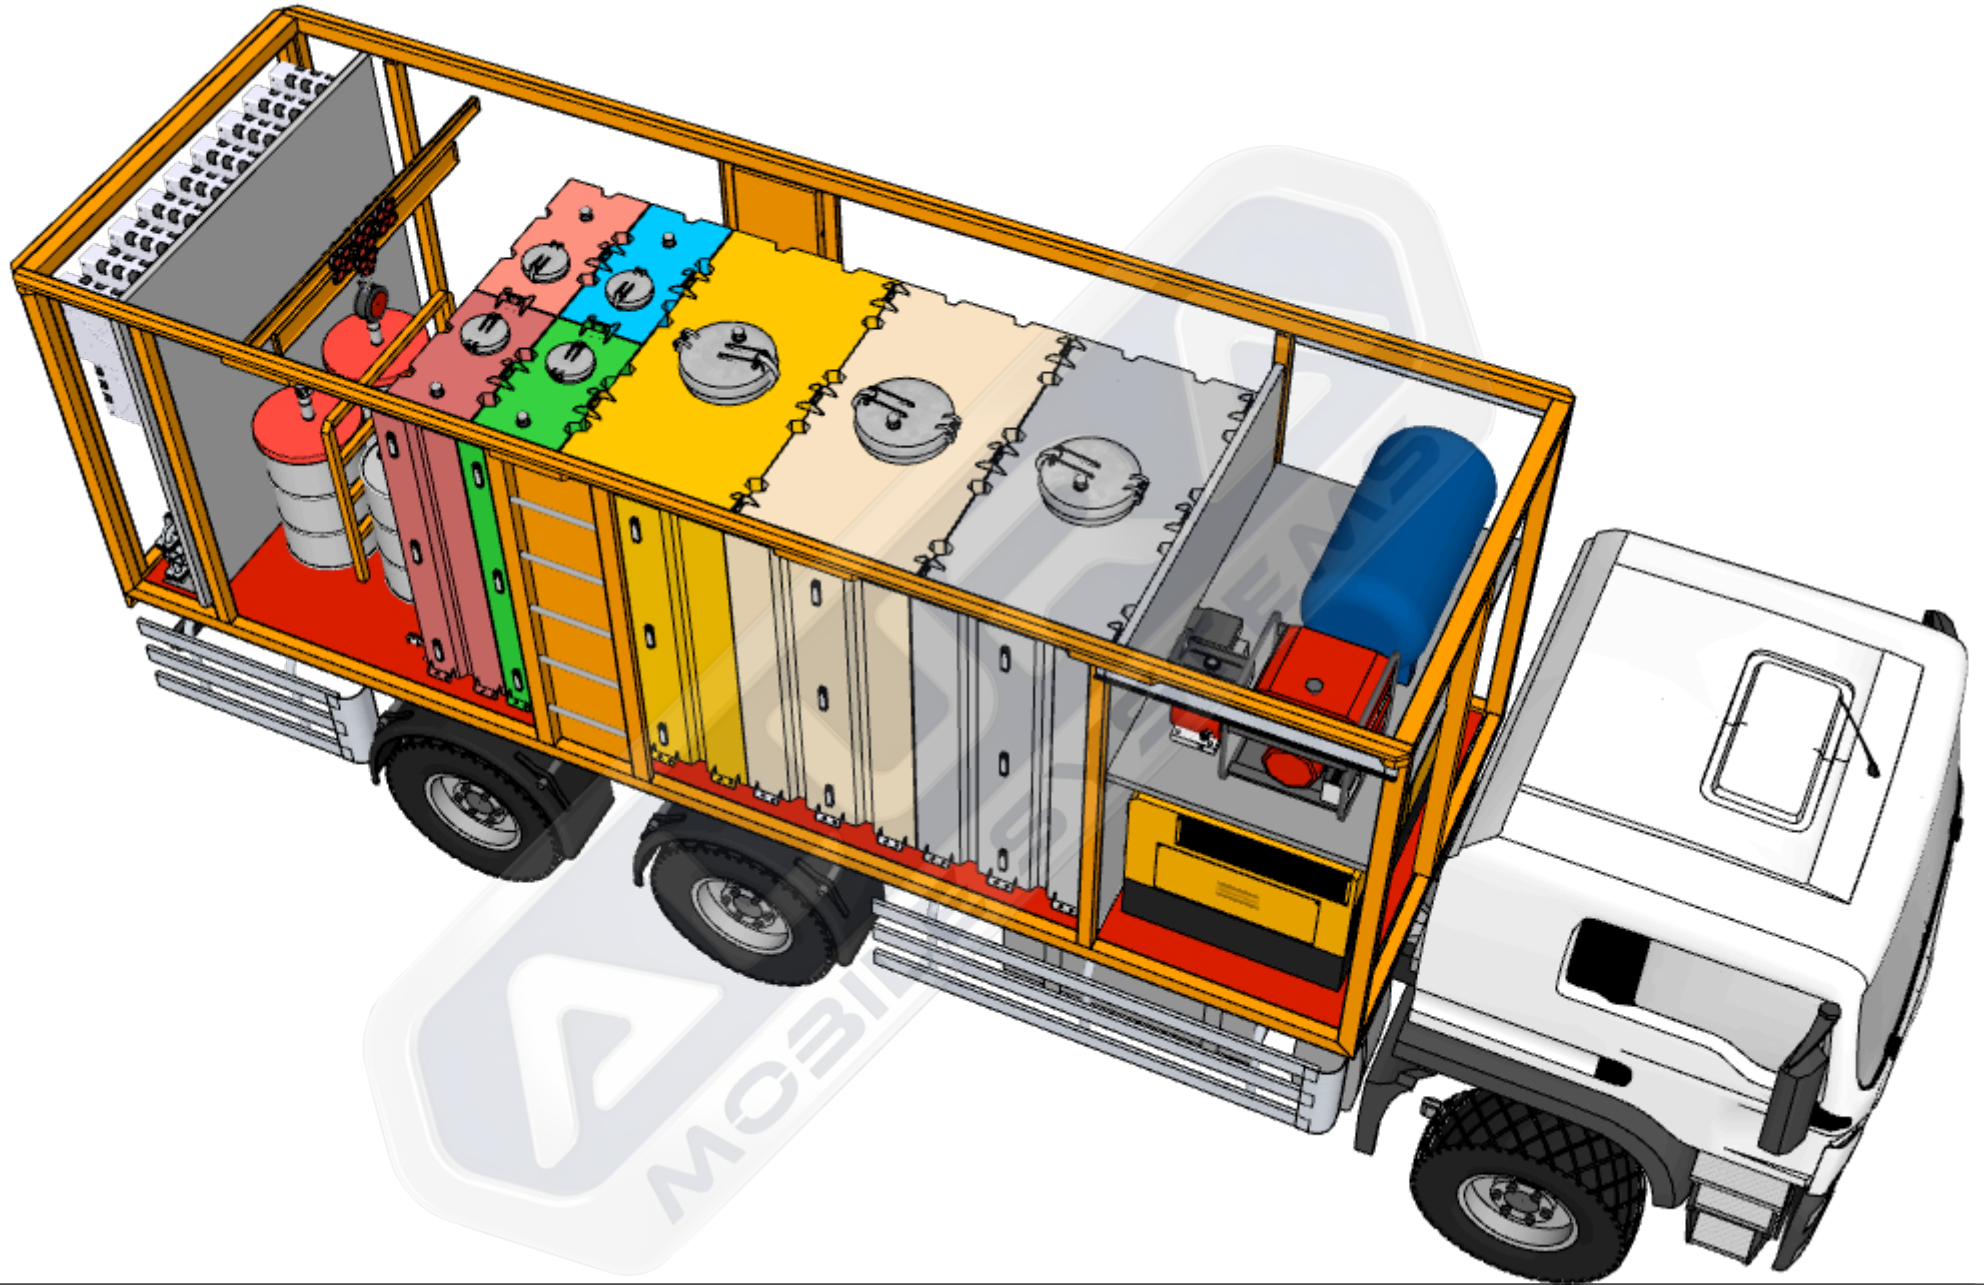


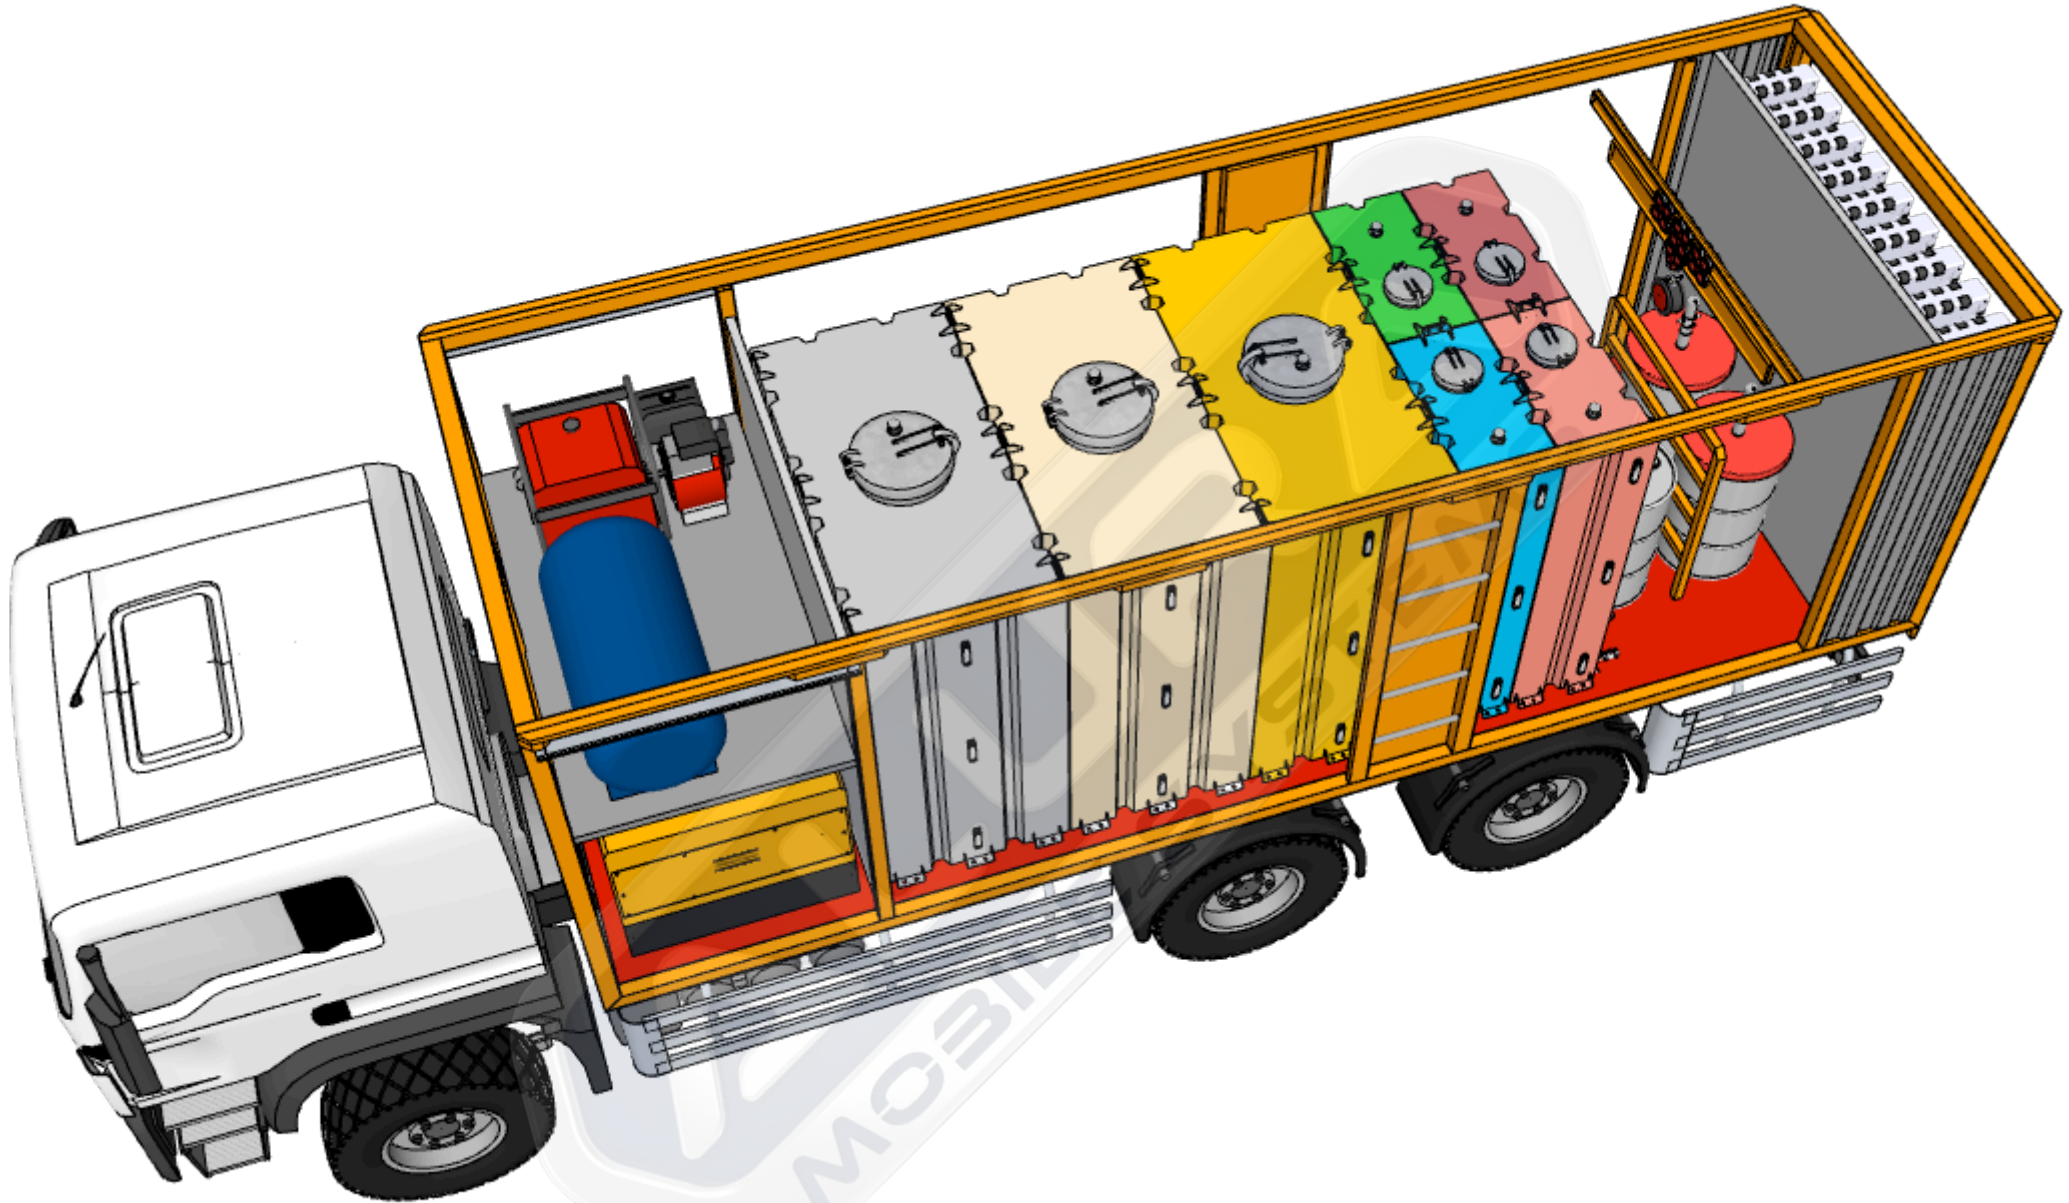

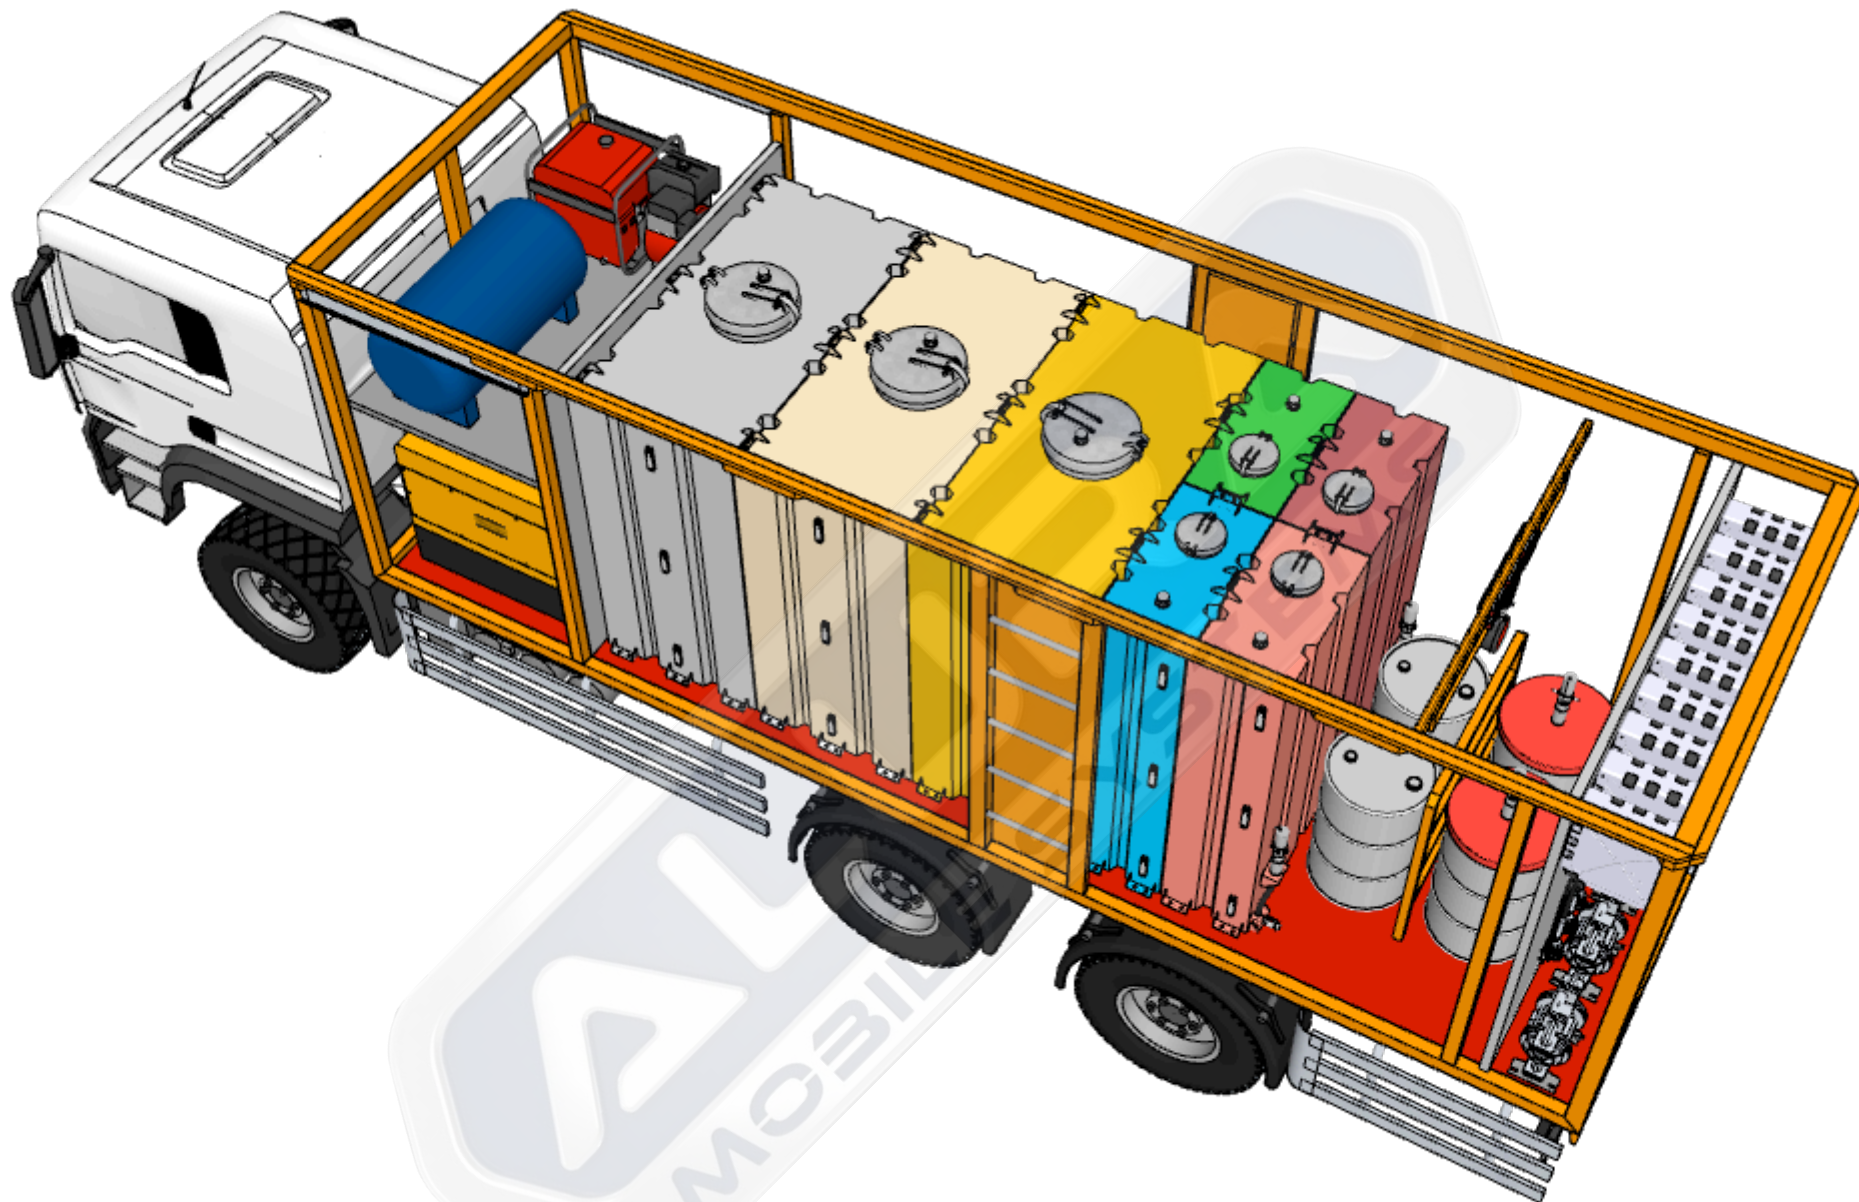


No	Equipment	Explanation	Producer	Orjin	Piece
1	Bodywork		Alura	Turkey	1
		From twisted C type channel steel. Base traverses 80mm height 3mm Floor 18mm Plywood plywood. Sliding windows to usable areas. Generator and compressor areas are quickly accessible cover. Exhaust and ventilation device. Stainless hinges and locks. Outside transportation center control board. Electrical cables are hidden inside the insulated chassis. Outside transportation center control board.	Electrical cables are hidden inside the insulated chassis. Quick access cover to the lubricating and washing rollers. Monolithic crane connection channel to the body frame. Fixed glass rear door. Environmental and interior lighting 220v. Acrylic industrial chassis and surface paint. Quick-access rear bumper drawers. Metal items are fixed to the chassis. Industrial polyurethane outer coating.		
1.1	Polyurea Surface Coating		Alura	Turkey	
		Polyurethane Industrial Coating Resistant to chemicals. Hygienic, mold-proof, rust and corrosion-free. It maintains its elasticity between 40 C and +200 C heat. Fire resistant CLASS A certification. Solvent free, superior waterproofing	Elastic This product, which has an elasticity of 400%, will prevent cracks that may occur in the future by working in cooperation with the structure to which it is applied. It prevents many damages that may occur due to impact on interior and exterior coatings.		
2	Aluminum Shutters		Haksan	Turkey	3
		Manuel Working Locking Systems Size : 1800 x 2300 mm 2 pcs : 1000 x 2000 mm			
3	Compressor	U 110	Atlas Copco	Sweden	1
		Working pressure 7 bar Free air delivery 2.8 m³/min Compressor oil system capacity: 5 Lt. Compression stages: 1 Engine Engine brand: KUBOTA Engine model: D902 Emission stage: Stage V Engine power at speed: 18.5 kW	Full load speed: 3600 rpm Idle speed: 2000 rpm Oil pan capacity: 3 Lt. Standard fuel tank capacity: 20 L Box weight: 500 kg		

No	Equipment	Explanation	Producer	Orjin	Piece
4	Air Tank		Alura	Turkey	1
		Capacity : 200 lt. Working Pressure: 15 bar. Test Pressure: 15 Bar. Sheet Thickness: 4 mm. Compressor Connection : 1" Air Outlet : 1/2"			
5	Pressure Washer Ref. 66324		Rotowash	Turkey	1
		Pressurized Hot Cold Spraying Pump Type: Pump Ceramic piston Max. Pressure: 250 bar Water flow rate: 450-900 L/h Engine Power: 13 / 14 Hp Seal System: Double Tool Sealed Seal	Piston System: Ceramic Fuel Capacity: Diesel / 30 Lt Fuel Consumption: 3 / 5 lt/h Heating Capacity: 6000/12000 cal/h Water Temp. at High Pressure: 30 - 140°C Spray Gun: Start Stop Spray Gun		
6	Washing H.Reels Ref. ART. 9430.501		Raasm	Italy	1
		Pressure : 400 bar Compatible fluids : Water Swivel joint : Zinc plated steel Seals : Polyurethane Characteristic : Fixed Material : Painted steel with ABS	Hose : ø 1/4" - 15 mt. Inlet : G 3/8" (f) Outlet : G 1/4" (m) Reel flow path : Zinc Plated Steel		
7	Oil Pumps	Ref. ART. 3C1/26111EAA	Raasm	Italy	2
		Diaphragm pumps - Aluminum Flow rate : 170 l/min Ratio : 1/1 Max pressure : 8 bar Max cycles for minute : 300 cpm Max working temperature : 100 °C	Noise level : 75 dB Air working pressure : 2/6 bar Fluid outlet connection : 1" Membranes : EPDM Gross weight : 12 kg		
8	Oil Pumps	Ref. ART. 3C1/40111NHH	Raasm	Italy	1
		Diaphragm pumps - Aluminum Flow rate : 480 l/min Ratio : 1/1 Max pressure : 8 bar Max cycles for minute : 220 cpm Max working temperature : 100 °C	Noise level : 78 dB Air working pressure : 2/6 bar Fluid outlet connection : 1".1/2 Membranes : NBR Gross weight : 21 kg		
9	Oil Pumps	Ref. ART. 33060	Raasm	Italy	2
		Pneumatic pumps for oil Flow rate: 23 l / min Air working pressure: 6/8 bar Average air consumption: 230 l / min Noise level: 81 dB Oil viscosity: 80 SAE	Fluid outlet connection : 1/2 Gross weight : 4,3 kg		

No	Equipment	Explanation	Producer	Orjin	Piece
10	Oil Reel	Ref. ART. 8530.416/AS	Raasm	Italy	5
		Pressure : 150 bar Compatible fluids : Oil Swivel joint : Zinc plated steel Seals : Polyurethane Characteristic : Fixed Material : Painted steel with ABS	Hose : $\varnothing$ 3/4" - 15 mt. Inlet : G 3/4" (f) Outlet : G 3/4" (m)		
11	Oil for Dispens	Ref: ART. 33146	Raasm	Italy	1
		Grip : Aluminum Terminal : Flexible Drip-catcher : Semiautomatic $\varnothing$ 35 mm Digital meter : Oils and similar Inlet swivel joint : G 3/4" (f)	Filter : Yes Level locking button : Yes		
12	Quick Connector	Ref.33126 / 33127	Raasm	Italy	1
		Female quick connector with check valve, thread G 3/4" (f) Male quick connector with check valve, thread G 3/4" (f)			
13	Oil Tank		Alura	Turkey	3
		Capacity: 4,000 Ltr. 2,5 mm Made from steel Level indicator Filler tap Pump stabilizer Balancing and stabilizing parts.	1" Drain valve 450 mm Manhole cover Size H / L / W: 2.000 x 2.000 x 1.000 mm		
14	Oil Tank		Alura	Turkey	2
		Capacity: 1,000 Ltr. 2.5mm Made from steel Level indicator Filler tap Pump stabilizer Balancing and stabilizing parts.	1" Drain valve 200 mm Manhole cover Size H / L / W: 2.000 x 1.000 x 500 mm		
15	Coolant Pumps	Ref. ART. 3C1/16111TTP	Raasm	Italy	1
		Diaphragm pumps - Aluminum Flow rate : 70 l/min Ratio : 1/1 Max pressure : 8 bar Max cycles for minute : 400 cpm Max working temperature : 100 °C	Noise level : 75 dB Air working pressure : 2/6 bar Fluid outlet connection : 1/2 Membranes : Hytrel Gross weight : 6.3 kg		

No	Equipment	Explanation	Producer	Orjin	Piece
16	Coolant Reel	Ref. ART. 8530.416/AS	Raasm	Italy	1
		Pressure : 150 bar Compatible fluids : Water Swivel joint : Zinc plated steel Seals : Polyurethane Characteristic : Fixed Material : Painted steel with ABS	Hose : $\varnothing$ 1/2" - 15 mt. Inlet : G 1/2" (f) Outlet : G 1/2" (m)		
17	Coolant for Dispens	Ref. ART.37762	Raasm	Italy	1
		Grip : Aluminum Terminal : Flexible Drip-catcher : Semiautomatic $\varnothing$ 16 mm Digital meter : Coolant Inlet swivel joint : G 1/2" (f)	Filter : Yes Level locking button : Yes		
18	Collant Tank		Alura	Turkey	1
		Capacity: 2,000 Ltr. 2.5mm Stainless Metal Level indicator Filler tap Pump stabilizer Balancing and stabilizing parts.	1" Drain valve 200 mm Manhole cover Size H / L / W: 2.000 x 1.000 x 500 mm		
19	Grease Pumps	Ref. ART. 116F/401	Raasm	Italy	2
		Flow rate : 10.000 g/min Ratio : 40:1 Compatible fluids : high viscosity oils and greases Air inlet connection : G 1/2" (f) Fluid outlet connection : G 1/2" (f)	Max supply pressure : 8 bar Max air consumption 8 bar : 2,8 m3/min Noise level : 80 dB Suitable for drums or tank : 180% 220 kg Packing : 148,5x22,5x29,7 cm Weight : 25 kg		
20	Grease Pumps	Ref. ART. 151F/701	Raasm	Italy	2
		Flow rate : 7.000 g/min Ratio : 70:1 Compatible fluids : high viscosity oils and greases Air inlet connection : G 1/2" (f) Fluid outlet connection : G 1/2" (f)	Max supply pressure : 8 bar Max air consumption 8 bar : 4,3 m3/min Noise level : 80 dB Suitable for drums or tank : 180% 220 kg Packing : 148,5x22,5x29,7 cm Weight : 33 kg		
21	Grease Reel	Ref. ART. 9430.501	Raasm	Italy	2
		Pressure : 400 bar Compatible fluids : Grease Swivel joint : Zinc plated steel Seals : Polyurethane Characteristic : Fixed Material : Painted steel with ABS	Hose : $\varnothing$ 1/4" - 15 mt. Inlet : G 3/8" (f) Outlet : G 1/4" (m) Reel flow path : Zinc Plated Steel		

No	Equipment	Explanation	Producer	Orjin	Piece
22	Barrel Cover	Ref. ART. 65160	Raasm	Italy	2
		Drum cover ø 600 mm for drums external ø 550 - 600 mm with union thread 2"			
23	Follower Plate	Ref. Art.10/60	Raasm	Italy	2
		Follower plate ø 585 mm for drums inside ø 540 - 580 mm, union ø 45 mm			
24	Grease Guns	Ref. Art.66888	Raasm	Italy	2
		Grease gun with flexible terminal 400 mm single swivel joint, inlet 1/4" (f)			
25	Water Pump		Karcher	Germany	1
		Maximum Motor power : 1000 W Maximum Water Flow: 4500 l/hour Maximum pressure: 50/5 m/bar Working pattern: 1.9 - 3 bar Maximum suction : 8 m Connection type : G1		Power Cable H05RN-F : 1 m Weight without accessories : 14.7 kg	
26	Coolant Reel	Ref. ART. 8530.416/AS	Raasm	Italy	1
		Pressure : 150 bar Compatible fluids : Water Swivel joint : Zinc plated steel Seals : Polyurethane Characteristic : Fixed Material : Painted steel with ABS		Hose : ø 1/2" - 15 mt. Inlet : G 1/2" (f) Outlet : G 1/2" (m)	
27	Water Tank		Alura	Turkey	1
		Capacity: 1,000 Ltr. 2.5mm Stainless Metal Level indicator Filler tap Pump stabilizer Balancing and stabilizing parts.		1" Drain valve 200 mm Manhole cover Size H / L / W: 2.000 x 2.000 x 500 mm	

No	Equipment	Explanation	Producer	Orjin	Piece
28	Control panel of all equipment.	Generator / Mains power connection.	Alura	Turkey	1
					
29	Hand Tools Set	Mechanical Tool Kit 43 Pieces	İzeltaş	Turkey	1
					
30	Outdoor Lighting	Operating Voltage / Current: DC 12/15V 1.4A Driving Type: Linear current and voltage controlled driver Light Source: 3W 12pcs power LED LENS Feature: 25° collimator LENS	CSR	Turkey	20
					
31	Chain Hoist	1 Tons 5 Meter Chain	Max Extra	Kore	1
					
32	Air Regulator	Air Inlet : 1/2" Filter : 20u Working Pressure: 05-9.9 atu Operating Temperature: 5-60°C Water Capacity: 80 ml Air Permeability: 2200 lt/min	Osaka	Japan	1
					
33	Air Line Connection	Polyurethane Pneumatic fittings	Osaka	Japan	1
					



No	Equipment	Explanation	Producer	Orjin	Piece
34	Fire Extinguisher		Osaka	Japan	4
		ABC Grade Fire Extinguishing Powder 6 Kg Capacity MAP Rate 40% Body made of A1 7114 Quality Plastered Sheet 18 Bar Working Pressure			
		0.70 Micron Electro Static Paint It Has a Refillable Structure.			

