

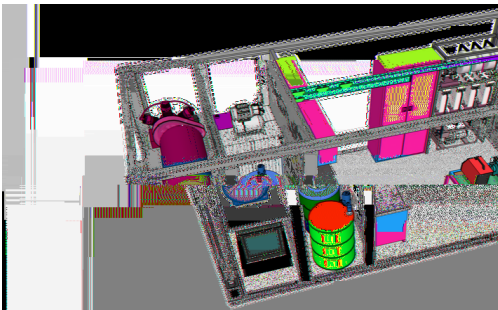
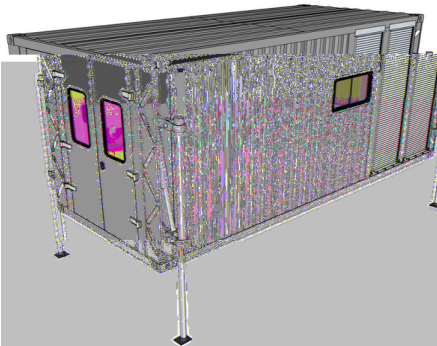
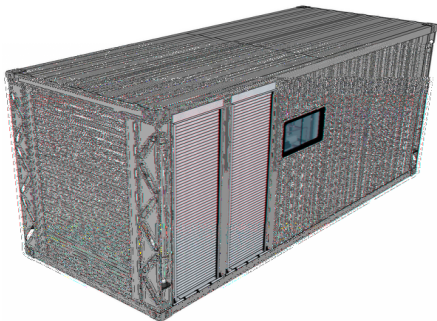










20' Dry / Standard Container  
From twisted C type channel steel.  
Base traverses 80mm height 3mm  
18 mm Elastomeric rubber insulation.  
Floor 18mm Plywood plywood.  
Sliding windows to usable areas.  
Generator and compressor areas are quickly accessible cover.  
Exhaust and ventilation device.  
Stainless hinges and locks.  
Outside transportation center control board.  
Electrical cables are hidden inside the insulated chassis.  
Outside transportation center control board.  
Electrical cables are hidden inside the insulated chassis.  
Quick access cover to the lubricating and washing rollers.  
Monolithic crane connection channel to the body frame.  
Environmental and interior lighting 220v.  
Acrylic industrial chassis and surface paint.  
Quick-access rear bumper drawers.  
Metal items are fixed to the chassis.  
Center control panel.  
Generator and compressor areas are quickly accessible cover.  
Cables in protective plastic sheath.  
Polyurethane hose in air line duct.  
Mains Electricity Connection Input.  
Perimeter and interior lighting 220 v.




|                                                                                     |                                                                                                                                                                                                          |                                                                                                                                                          |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                     |                                                                                                                                                                                                          |                                                                                                                                                          |
|                                                                                     |                                                                                                                                                                                                          |                                                                                                                                                          |
|    | <p>Manuel Working<br/> Locking Systems<br/> Size : 1.000 x 2.300 mm 2 Pcs<br/> 2.000 x 2.300 mm 1 Pcs.</p>                                                                                               |                                                                                                                                                          |
|                                                                                     |                                                                                                                                                                                                          |                                                                                                                                                          |
|    | <p>Hydraulic lowering container lowering system.<br/> System power: 120 bar<br/> Working power: 220V<br/> Carrying capacity: 10 tons<br/> Control Panel</p>                                              |                                                                                                                                                          |
|   | <p>Control of all machines.<br/> Lighting control.<br/> Compressor Pressure gauge.</p>                                                                                                                   |                                                                                                                                                          |
|  | <p>Cable Thickness: 1x6 mm.<br/> Cable Length: 15 Mt<br/> Cable Type: H07V - K<br/> Automatic Rewind<br/> Plastic outer casing<br/> steel swivel wall bracket</p>                                        | <p>It can be easily stopped by the end user thanks to the latched stop device.<br/> CE approved<br/> Dimensions: 28 x 28 x 19 Cm<br/> Weight: 2.8 Kg</p> |
|   | <p>Body : Polycarbonate RAL 9003 body ,<br/> Metal lock clip Diffuser: Polycarbonate opal cover<br/> Light Source: Mid Power LED<br/> Power: 28 W / 38 W / 55 W<br/> Input Voltage: 220-240V - IP 65</p> |                                                                                                                                                          |
|  | <p>Dimensions: 560 x 560 mm<br/> Wing: Galvanized<br/> Current: 220 V<br/> Motor: 0.34 hp.</p>                                                                                                           |                                                                                                                                                          |

|                                                                                    |                                                                                                                                                                                                               |                                                                                                                                           |
|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                    |                                                                                                                                                                                                               |                                                                                                                                           |
|                                                                                    |                                                                                                                                                                                                               |                                                                                                                                           |
|    | Cooling Capacity : 12.000 btu/s<br>Heating Capacity : 13.000 btu/s<br>Energy efficiency class : A++<br>Cooling power in watts : 1213<br>Indoor Unit Sound Level : 40.5 db<br>Outdoor Unit Sound Level : 56 db | Estimated room size : 16 m2<br>Refrigerant : R32<br>Dehumidification function : Yes<br>Weight : 7.6 kg.                                   |
|                                                                                    |                                                                                                                                                                                                               |                                                                                                                                           |
|    | ABC Grade Fire Ext. Powder<br>12 Kg Capacity<br>MAP Rate 40%<br>Body made of A1 7114 Quality<br>Plastered Sheet                                                                                               | 18 Bar Working Pressure<br>0.70 Mic.Elec. Static Paint.                                                                                   |
|                                                                                    |                                                                                                                                                                                                               |                                                                                                                                           |
|   | Standby/Prime Power: 22 kVa / 23 kVa<br>Standard Voltage: 400/230 V / 3 Phase<br>Engine Bran: Perkins<br>Engine Model: 1103A-33TG1<br>Alternator: Sincron<br>RPM: 1500 rpm.                                   | Frequency: 50 Hz.<br>Water Cooling                                                                                                        |
|                                                                                    |                                                                                                                                                                                                               |                                                                                                                                           |
|  | 20 Mt 5*1.5 Mm<br>Three Phase : 220 Volt<br>Cable Thickness: 5*1.5 Mm2<br>Cable Length: 20 Mt<br>Cable Type : H07RN-F<br>Power : 1000-3000 W                                                                  | Auto Rewind<br>Plastic outer cover steel swivel wall bracket<br>Weight: 9 Kg<br>Dimensions: 42x39x23 Cm                                   |
|                                                                                    |                                                                                                                                                                                                               |                                                                                                                                           |
|  | Work Bench<br>Width: 1.800 mm<br>Depth: 700 mm<br>Height: 2.000 mm<br>Number of Drawers: 10<br>Drawer Carrying Capacity: 60 kg.                                                                               | Shelf Carrying Cap .: 80 kg.<br>Socket 2 Pieces<br>25 mm MDF + Pvc on worktops<br>Electrostatic powder paint<br>Suspension boards modular |
|                                                                                    |                                                                                                                                                                                                               |                                                                                                                                           |
|  | Material Cabinet<br>Width: 920 mm<br>Depth: 450 mm<br>Height: 2.000 mm                                                                                                                                        |                                                                                                                                           |
|                                                                                    |                                                                                                                                                                                                               |                                                                                                                                           |



|                                                                                     |                                                                                                                                                                                                                                                                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                     |                                                                                                                                                                                                                                                                                                                                     |
|    | Galvanized shelves and uprights.<br>Width: 750 mm<br>Depth: 600 mm<br>Height: 2.000 mm<br>Drawer: 5 pcs.                                                                                                                                                                                                                            |
|                                                                                     |                                                                                                                                                                                                                                                                                                                                     |
|    | Cast Body<br>Leveler's Vise : 100 Mm<br>Jaw Spacing : 100 mm<br>Mouth Width: 125 Mm                                                                                                                                                                                                                                                 |
|                                                                                     |                                                                                                                                                                                                                                                                                                                                     |
|   | Drilling Capacity mm 16<br>Pinole Diameter: 40 mm<br>Pinole Movement:50 mm<br>Spindle Column Distance: 115 mm<br>Spindle Nose B16<br>Spindle Speeds: 400-2500 rpm<br>Number of Spindle Speeds 9<br>Table Size: 170x175 mm<br>Spindle Table Distance: 245 mm<br>Spindle Base Distance: 330 mm<br>Motor: 500W / 220V<br>Weight: 22 Kg |
|                                                                                     |                                                                                                                                                                                                                                                                                                                                     |
|  | Grinding Diameter: 200 mm<br>Horsepower: 0.75 HP<br>Voltage: 230 Volts.<br>Speed: 3,000 rpm.                                                                                                                                                                                                                                        |
|                                                                                     |                                                                                                                                                                                                                                                                                                                                     |
|   | Chassis Piston Air Compressor<br>Engine Power: 5.5 hp<br>Air Intake: 630 lt/min<br>Revolution : 950 rpm<br>Pressure : 12 bar<br>Working Power : 380 V                                                                                                                                                                               |
|                                                                                     |                                                                                                                                                                                                                                                                                                                                     |
|   | Capacity : 300 lt.<br>Working Pressure: 15 bar.<br>Test Pressure: 15 Bar.<br>Sheet Thickness: 4 mm.<br>Compressor Connection : 1"<br>Air Outlet : 1/2"                                                                                                                                                                              |






|                                                                                     |                                                                                                                                                                                              |                                                                                                                                                                                        |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                     |                                                                                                                                                                                              |                                                                                                                                                                                        |
|     | <p>Hose Diameter: 10x15 Mm<br/>Hose Length: 20 Mt<br/>Working Pressure: 15 Bar<br/>Inlet and Outlet Dimension: 3/8" F - 3/8" M<br/>Automatic Rewind</p>                                      | <p>Plastic outer casing<br/>steel swivel wall bracket<br/>It can be easily stopped by the end user thanks to the latched stop device.<br/>Size: 50x43.5x23.5 cm<br/>Weight: 8.3 Kg</p> |
|                                                                                     |                                                                                                                                                                                              |                                                                                                                                                                                        |
|    | <p>Capacity : 500 Ltr<br/>Made of Stainless : 2 mm<br/>Level Indicator : Manuel<br/>Filling tap : 2"<br/>Pump stabilizer : 2 "<br/>Discharging valve : 1"</p>                                |                                                                                                                                                                                        |
|                                                                                     |                                                                                                                                                                                              |                                                                                                                                                                                        |
|   | <p>Maximum Motor power : 1000 W<br/>Maximum Water Flow: 4500 l/hour<br/>Maximum pressure: 50/5 m/bar<br/>Working pattern: 1.9 - 3 bar<br/>Maximum suction : 8 m<br/>Connection type : G1</p> | <p>Power Cable H05RN-F : 1 m<br/>Weight without accessories : 14.7 kg</p>                                                                                                              |
|                                                                                     |                                                                                                                                                                                              |                                                                                                                                                                                        |
| 1                                                                                   |                                                                                                                                                                                              |                                                                                                                                                                                        |
|   | <p>Pressure: 20 bar.<br/>Compatible fluids: Water<br/>Swivel joint: Stainless Metal<br/>Seals: Polyurethane<br/>Characteristic: Fixed<br/>Inlet: G 1/2 " (f)</p>                             | <p>Outlet: G 1/2 "(g)<br/>Operating temperature -40 C / +80 C<br/>Size: 1/2 "<br/>Pressure: 10 bar<br/>Length: 20 mt</p>                                                               |
|                                                                                     |                                                                                                                                                                                              |                                                                                                                                                                                        |
|   | <p>Pressure: 200 bar<br/>Flow rate: 900 lt/hour<br/>Engine Power: 7.5 hp<br/>Voltage - Phase 380V-3 50 Hz<br/>Weight: 74<br/>Spray gun</p>                                                   |                                                                                                                                                                                        |
|                                                                                     |                                                                                                                                                                                              |                                                                                                                                                                                        |
|  | <p>Pressure: 400 bar.<br/>Hose Length: 15 mt.<br/>Compatible fluids: Water<br/>Swivel joint: Stainless Metal<br/>Characteristic: Fixed<br/>Material: Painted steel</p>                       |                                                                                                                                                                                        |




Pneumatic pumps for oil  
Flow rate: 18 l / min  
Air working pressure: 6/8 bar  
Average air consumption: 230 l / min  
Noise level: 81 dB  
Oil viscosity: 80 SAE




|                                                                                     |                                                                                                                                                                                  |                                                                                                                                                         |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                     |                                                                                                                                                                                  |                                                                                                                                                         |
|     |                                                                                                                                                                                  | Flu: Technopolymer<br>Digital meter: Yes<br>Inlet swivel joint: G 1/2 f<br>Filter: Yes<br>Level locking button: Yes                                     |
|    |                                                                                                                                                                                  | Capacity : 200 Ltr<br>Made of Stainless : 2 mm<br>Level Indicator : Manuel<br>Filling tap : 2"<br>Pump stabilizer : 2 "<br>Discharging valve : 1"       |
|   | Diaphragm Pumps<br>Flow rate: 70 l / min<br>Max pressure: 8 bar.<br>Max cycles for minute: 400 cpm.<br>Max working temperature: 100 ° C<br>Noise level: 70 dB                    | Air working pressure: 2/6 Bar<br>Membranes: EPDM                                                                                                        |
|   | Pressure: 20 bar<br>Length: 15 mt<br>Compatible fluids: Oils and Similar<br>Material: Painted Steel<br>Inlet-Outlet : G 1/2 ""f - G 1/2 ""m<br>Pressure - Size: 1/2 "" - 160 bar |                                                                                                                                                         |
|  |                                                                                                                                                                                  | Volume: 200 lt<br>Metal prism tank<br>Occupancy indicator<br>Filler caps<br>Pump stabilizer<br>Discharge 1" valve                                       |
|  |                                                                                                                                                                                  | Capacity: 600 / 1.200 kg<br>Lifting height: 10 mt<br>Lifting speed: 10/5 m / min<br>Rope length: 20 mt<br>Engine power: 930 W<br>Voltage: 220-50 V / Hz |

|                                                                                     |                                                                                                                                                                                                               |                                                                                                                                                                                                      |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                     |                                                                                                                                                                                                               |                                                                                                                                                                                                      |
|    | Mains Voltage: 230 V<br>Mains Fuse: 16 A<br>Power Drawn: 2.2 / 5 Kw<br>Idle Operating Voltage: 78 V<br>Current Adjustment Range: 20 - 220 A<br>Rated Current: 180 A - 20%                                     | Electrode Diameter: 0.6 - 1.0 mm<br>Protection Class: IP 23<br>Machine Dimension: 620 x 260 x 490 mm<br>Weight: 22 kg                                                                                |
|                                                                                     |                                                                                                                                                                                                               |                                                                                                                                                                                                      |
|     | 9 Steps 2.6 Mt<br>Maximum User Weight: 150kg<br>High Quality Aluminum construction with Premium Aluminum Alloy makes this telescopic ladder much safer.                                                       |                                                                                                                                                                                                      |
|                                                                                     |                                                                                                                                                                                                               |                                                                                                                                                                                                      |
|   | Operating Voltage / Current: DC 12/15V 1.4A<br>Driving Type: Linear current and voltage controlled driver<br>Light Source: 3W 12pcs power LED<br>LENS Feature: 25° collimator LENS                            | White:5000-7000K<br>Physical Properties : Polycarbonate plastic black aluminum profile                                                                                                               |
|                                                                                     |                                                                                                                                                                                                               |                                                                                                                                                                                                      |
|  | Operating System: Android 11.<br>Processor: 1.8GHz Quad Core.<br>Memory: 4GB RAM / 64GB Internal<br>Display: 8 inch LED capacitive touchscreen, 1280 x 800 resolution.<br>Battery: 7700mAh 3.7V lit.-polymer. | Connectivity: Wi-Fi (802.11 a/b/g/n), Mini USB 2.0, Micro SD Card.<br>Camera: 8 Megapixels on the back.<br>Operating Temperature: 0 to 50 °C<br>Storage Temperature: -10 to 60 °C<br>Mode No : MX900 |
|                                                                                     |                                                                                                                                                                                                               |                                                                                                                                                                                                      |
|  | Crimping hose sizes from 4 / 30 mm.<br>8 legs.<br>Used for manually crimping the sheet metal capsules of low-pressure flexible hoses.                                                                         | Suitable for vehicle air conditioning hoses and washing machine hoses, welding machine torch and shoe crimping, sprayer hoses, plumbing, and fire hose manufacturers.                                |
|                                                                                     |                                                                                                                                                                                                               |                                                                                                                                                                                                      |
|  | Width: 1000 mm<br>Depth: 400 mm<br>Height: 1800 mm<br>Color: RAL 5015 powder coated<br>Single-sided, fixed tool stand with 63 boxes                                                                           |                                                                                                                                                                                                      |



|                                                                                     |                                                                                                                                                                                             |                                                                                                                                                                                                                           |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                     |                                                                                                                                                                                             |                                                                                                                                                                                                                           |
|    | <p>Hydraulic Bottle Jack<br/>Capacity: 10 Tons<br/>Extension Height: 200 mm<br/>Reinforced Height: 405 mm<br/>Model No: 11556</p>                                                           |                                                                                                                                                                                                                           |
|                                                                                     |                                                                                                                                                                                             |                                                                                                                                                                                                                           |
|     | <p>Mains Voltage: 220-240 V<br/>Strength: 1100 - 2300<br/>Charging/Starter Voltage: 12 / 24 V<br/>Charging Current: 80 / 40<br/>Charging Rated Current: 150</p>                             | <p>Machine Dimension: 200 x 260 x 340 mm<br/>Weight: 6 kg<br/>Model No : TW807590</p>                                                                                                                                     |
|                                                                                     |                                                                                                                                                                                             |                                                                                                                                                                                                                           |
|    | <p>Collet Diameter: 6 mm<br/>Chip Diameter: 38.00 mm<br/>Idle Speed: 22,000 rpm<br/>Air Inlet Nipple: 1/4"<br/>Air Consumption: 185 l/min<br/>Length: 170 mm</p>                            | <p>1 Opt 127 Die Grinder<br/>1 1/8 Collet<br/>1 1/4 Collet<br/>10 Mounted Grinding Wheels and Sandpaper<br/>1 Plastic Bag<br/>Model No: OPT4</p>                                                                          |
|                                                                                     |                                                                                                                                                                                             |                                                                                                                                                                                                                           |
|   | <p>Battery voltage: 18 Volts<br/>Battery capacity: 4 Amps<br/>Idle speed: 11,000 rpm<br/>Wheel diameter: 125 mm<br/>Weight excluding battery: 1.6 kg<br/>Brushless motor: 800 W</p>         | <p>2 GBA 18V 4 Amp Batteries<br/>1 GAL 18V-40 Professional Fast Charger<br/>1 Connection Flange - Clamping Nut<br/>1 Grinding Wrench - Additional Handle<br/>1 Protective Cover - 1 Tool Kit<br/>Model No: GWS 180-Li</p> |
|                                                                                     |                                                                                                                                                                                             |                                                                                                                                                                                                                           |
|  | <p>Battery Voltage: 18.0 Volts<br/>Torque: 84/100/150 Nm<br/>Idle Speed: 0–550 / 0–2,200 RPM<br/>Battery Type: Lithium-Ion<br/>Chuck Dia. Min./Max.: 1.5 / 13 mm<br/>Torque Steps: 25+1</p> | <p>Drilling Diameter in Wood, Max.: 150 mm<br/>Drilling Diameter in Steel, Max.: 16 mm<br/>Screw Diameter, Max.: 13 mm<br/>Battery Capacity: 8 amps<br/>Weight (excluding battery): 2.1 kg<br/>Model No : GSR 18V-150</p> |
|                                                                                     |                                                                                                                                                                                             |                                                                                                                                                                                                                           |
|  | <p>M6 - M 16 Drilling Set<br/>18 pièces</p>                                                                                                                                                 |                                                                                                                                                                                                                           |

|                                                                                     |  |                                                                                                                                                                                   |  |                              |  |
|-------------------------------------------------------------------------------------|--|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|------------------------------|--|
|                                                                                     |  |                                                                                                                                                                                   |  |                              |  |
|                                                                                     |  |                                                                                                                                                                                   |  |                              |  |
|    |  | <p>Battery Voltage: 18 Volts<br/>Battery Capacity: 5.0 Ah<br/>Weight: 620 Gr<br/>COOLPACK for up to 100% longer battery life.<br/>Model No : 1600A002U5</p>                       |  |                              |  |
|                                                                                     |  |                                                                                                                                                                                   |  |                              |  |
|     |  | <p>Chrome vanadium, chrome-plated,<br/>PVC insulated<br/>Plier mouth: 40 mm<br/>Length: 315 mm<br/>Length (inches): 12 1/2"<br/>Weight: 530 g</p>                                 |  | <p>Model No : 2400110315</p> |  |
|                                                                                     |  |                                                                                                                                                                                   |  |                              |  |
|   |  | <p>Allen Key Set: 8 Pieces<br/>Sizes: 2.5 – 3 – 4 – 5 – 6 – 7 – 8 – 10</p>                                                                                                        |  |                              |  |
|                                                                                     |  |                                                                                                                                                                                   |  |                              |  |
|   |  | <p>Chrome vanadium, Chrome plated<br/>Technical Contents<br/>8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 -<br/>17 - 18 - 19 - 21 - 22 - 24 mm<br/>15 pieces.<br/>Model No : 2115</p> |  |                              |  |
|                                                                                     |  |                                                                                                                                                                                   |  |                              |  |
|   |  | <p>Fork Double Wrench Set<br/>6×7 – 8×9 – 10×11 – 12×13 – 14×15 –<br/>16×17 – 18×19 – 20×22 – 21×23 –<br/>24×26 – 25×28 – 30×32 mm.</p>                                           |  |                              |  |
|                                                                                     |  |                                                                                                                                                                                   |  |                              |  |
|  |  | <p>Combination Wrench With Ratchet Set<br/>6 – 7 – 8 – 9 – 10 – 11 – 12 – 13 – 14<br/>– 15 – 16 – 17 – 18 – 19 – 20 – 21 –<br/>22 – 24 – 27 – 30 – 32 mm.</p>                     |  |                              |  |



|                                                                                     |  |                                                                                                                                                                                                                                |  |  |  |
|-------------------------------------------------------------------------------------|--|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|
|                                                                                     |  |                                                                                                                                                                                                                                |  |  |  |
|                                                                                     |  |                                                                                                                                                                                                                                |  |  |  |
|     |  | <p>1/2" Twelve Corner Socket Wrench: 1/2" Intermediate Arm: 125 – 250 mm<br/>10.11.12.13.14.15.16.17.18.19.21.22.2<br/>3.24.26.27.28.30.32<br/>1/2" Ratchet Handle: 250 mm<br/>1/2" Joint: 70 mm<br/>1/2" T Handle Adapter</p> |  |  |  |
|                                                                                     |  |                                                                                                                                                                                                                                |  |  |  |
|    |  | <p>Single Ended Tubular Socket Wrench<br/>Set with Handle Bar.<br/>6×7 – 8×9 – 10×11 – 12×13 – 14×15 –<br/>16×17 – 18×19 – 20×22<br/>Mil 5×125 – 8×180 mm</p>                                                                  |  |  |  |
|                                                                                     |  |                                                                                                                                                                                                                                |  |  |  |
|    |  | <p>1/2" socket square<br/>Tightening range: 40 - 200 Nm<br/>Weight: 1,590 g<br/>Model No: 4020</p>                                                                                                                             |  |  |  |
|                                                                                     |  |                                                                                                                                                                                                                                |  |  |  |
|  |  | <p>Electronics Side Cutter<br/>Electronics Peak Chisel<br/>Electronics Long Nose Pliers<br/>Electronics Pliers</p>                                                                                                             |  |  |  |



|    |                                 |         |         |   |
|----|---------------------------------|---------|---------|---|
| 1  | 20 ft. NATO Container AMG       | Alura   | Turkey  | 1 |
| 2  | Aluminum Shutters               | Alura   | Turkey  | 3 |
| 3  | Hydraulic Loading System.       | Alura   | Turkey  | 1 |
| 4  | Control Panel                   | Alura   | Turkey  | 1 |
| 5  | Grounding Reel                  | Mavel   | Italy   | 1 |
| 6  | Lighting                        | EAT     | Turkey  | 6 |
| 7  | Ventilation                     | Al-Fan  | Turkey  | 2 |
| 8  | Air Conditioning                | Bosch   | Germany | 1 |
| 9  | Fire Extinguisher               | Star    | Turkey  | 2 |
| 10 | Generator Diesel                | Power   | Turkey  | 1 |
| 11 | Cable Roller                    | Mavel   | Italy   | 1 |
| 12 | Work Bench                      | Alura   | Turkey  | 1 |
| 13 | Cabinet                         | Alura   | Turkey  | 1 |
| 14 | Cabinet                         | Alura   | Turkey  | 1 |
| 15 | Clamp                           | izeltaş | Turkey  | 1 |
| 16 | Table Top Column Drill          | Foreman | Kore    | 1 |
| 17 | Grinding Machine                | Workman | Taiwan  | 1 |
| 18 | Pistone Compressor              | Aykom   | Turkey  | 1 |
| 19 | Air Tank                        | Alura   | Turkey  | 1 |
| 20 | Air Reel                        | Mavel   | Italy   | 1 |
| 21 | Water Tank                      | Alura   | Turkey  | 1 |
| 22 | Water Pump                      | Karcher | Germany | 1 |
| 23 | Water Hose Reel                 | Karcher | Germany | 1 |
| 24 | Cold Washing Machine            | Alura   | Turkey  | 1 |
| 25 | Washing Hose Reels              | Alura   | Turkey  | 1 |
| 26 | Oil Pumps                       | Raasm   | Italy   | 1 |
| 27 | Hose Reels                      | Raasm   | Italy   | 1 |
| 28 | Guns for dispensing             | Raasm   | Italy   | 1 |
| 29 | Oil Tank                        | Alura   | Turkey  | 1 |
| 30 | Antifreeze Pump                 | Raasm   | Italy   | 1 |
| 31 | Antifreeze Hose Reels           | Raasm   | Italy   | 1 |
| 32 | Guns for dispensing             | Raasm   | Italy   | 1 |
| 33 | Antifreeze Tank                 | Alura   | Turkey  | 1 |
| 34 | Waste Oil / Diagram Pump        | Raasm   | Italy   | 1 |
| 35 | Waste Oil / Hose Reel           | Raasm   | Italy   | 1 |
| 36 | Waste Tank                      | Alura   | Turkey  | 1 |
| 37 | Crane                           | Atlas   | Kore    | 1 |
| 38 | Welding Machine MAG / MIG / TIG | Telwin  | Italy   | 1 |
| 39 | Telescopic Ladder               | KEP     | Turkey  | 1 |
| 40 | Outdoor Lighting                | CSR     | Turkey  | 6 |
| 41 | Car Fault Tester Diagnostic     | Autel   | China   | 1 |
| 42 | Hydraulic Hose Crimping Manuel  | Himpo   | Turkey  | 1 |



|    |                                             |           |         |   |
|----|---------------------------------------------|-----------|---------|---|
| 45 | Hose Accessory Stand                        | Alura     | Turkey  | 1 |
| 44 | Car Fault Tester Diagnostic                 | WorlForce | Germany | 1 |
| 45 | Battery Start Machine                       | Telwin    | Italy   | 1 |
| 46 | Air Grinding Set                            | Osaka     | Tiawan  | 1 |
| 47 | Hand Grinding Machine (Batteries)           | Bosch     | Germany | 1 |
| 48 | Hand Drill (Batteries)                      | Bosch     | Germany | 1 |
| 49 | Drill Bit                                   | Bosch     | Germany | 1 |
| 50 | Battery 18V                                 | Bosch     | Germany | 2 |
| 51 | Adjustable Wrenches                         | İzeltaş   | Turkey  | 1 |
| 52 | T Allen Key Set                             | İzeltaş   | Turkey  | 1 |
| 53 | Combination Wrench                          | İzeltaş   | Turkey  | 1 |
| 54 | Wrench Set                                  | İzeltaş   | Turkey  | 1 |
| 55 | Combination Wrench                          | İzeltaş   | Turkey  | 1 |
| 56 | 1/2" Twelve Corner Socket Wrench Set 24 pcs | İzeltaş   | Turkey  | 1 |
| 57 | Tubular Socket                              | İzeltaş   | Turkey  | 1 |
| 58 | Ratchet Torque Wrench                       | İzeltaş   | Turkey  | 1 |
| 59 | Pliers Side Cutter Set                      | İzeltaş   | Turkey  | 1 |