

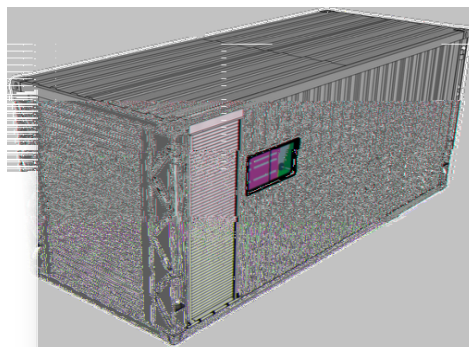

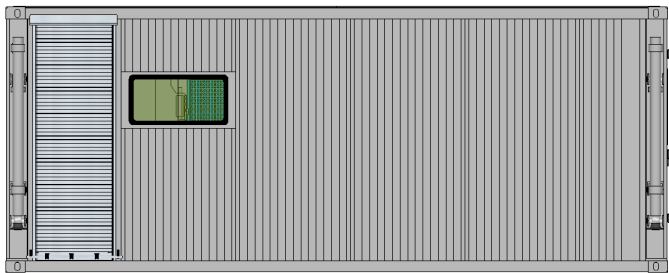




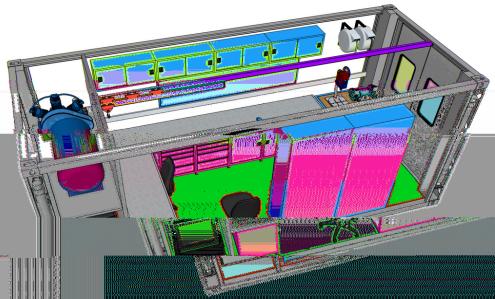

20' Dry / Standard Container
From twisted C type channel steel.
Base traverses 80mm height 3mm
18 mm Elastomeric rubber insulation.
Floor 18mm Plywood plywood.
Sliding windows to usable areas.
Generator and compressor areas are quickly accessible cover.
Exhaust and ventilation device.
Stainless hinges and locks.
Outside transportation center control board.
Electrical cables are hidden inside the insulated chassis.
Outside transportation center control board.
Electrical cables are hidden inside the insulated chassis.
Quick access cover to the lubricating and washing rollers.
Monolithic crane connection channel to the body frame.
Environmental and interior lighting 220v.
Acrylic industrial chassis and surface paint.
Quick-access rear bumper drawers.
Metal items are fixed to the chassis.
Center control panel.
Generator and compressor areas are quickly accessible cover.
Cables in protective plastic sheath.
Polyurethane hose in air line duct.
Mains Electricity Connection Input.
Perimeter and interior lighting 220 v.

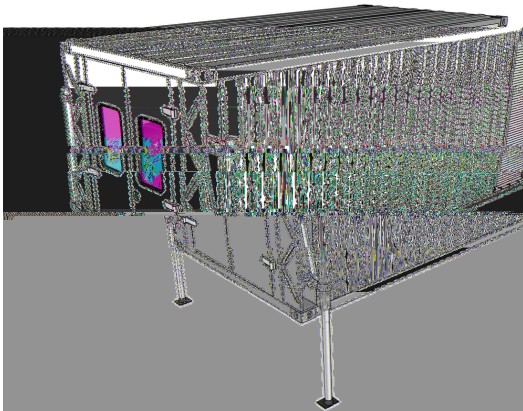

Manuel Working
Locking Systems
Size : 1.000 x 2.300 mm 2 Pcs
2.000 x 2.300 mm 1 Pcs.


Hydraulic lowering container lowering
system.
System power: 120 bar
Working power: 220V
Carrying capacity: 10 tons
Control Panel

Control of all machines.
Lighting control.
Compressor Pressure gauge.

Cable Thickness: 1x6 mm.
Cable Length: 15 Mt
Cable Type: H07V - K
Automatic Rewind
Plastic outer casing
steel swivel wall bracket

Body : Polycarbonate RAL 9003 body ,
Metal lock clip Diffuser: Polycarbonate
opal cover
Light Source: Mid Power LED
Power: 28 W / 38 W / 55 W
Input Voltage: 220-240V - IP 65

Dimensions: 560 x 560 mm
Wing: Galvanized





Cooling Capacity : 12.000 btu/s
Heating Capacity : 13.000 btu/s
Energy efficiency class : A++
Cooling power in watts : 1213
Indoor Unit Sound Level : 40.5 db
Outdoor Unit Sound Level : 56 db

Estimated room size : 16 m2
Refrigerant : R32
Dehumidification function : Yes
Weight : 7.6 kg.



ABC Grade Fire Ext. Powder
12 Kg Capacity
MAP Rate 40%
Body made of A1 7114 Quality
Plastered Sheet

18 Bar Working Pressure
0.70 Mic.Elec. Static Paint.



Standby/Prime Power: 22 kVa / 23 kVa
Standard Voltage: 400/230 V / 3 Phase
Engine Bran: Perkins
Engine Model: 1103A-33TG1
Alternator: Sincron
RPM: 1500 rpm.

Frequency: 50 Hz.
Water Cooling



20 Mt 5*1.5 Mm
Three Phase : 220 Volt
Cable Thickness: 5*1.5 Mm2
Cable Length: 20 Mt
Cable Type : H07RN-F
Power : 1000-3000 W

Auto Rewind
Plastic outer cover steel swivel wall
bracket
Weight: 9 Kg
Dimensions: 42x39x23 Cm





Work Bench
Width: 1.800 mm
Depth: 700 mm
Height: 2.000 mm
Number of Drawers: 10
Drawer Carrying Capacity: 60 kg.

Shelf Carrying Cap .: 80 kg.
Socket 2 Pieces
25 mm MDF + Pvc on worktops
Electrostatic powder paint
Suspension boards modular







WxDxH: 1.000 x 450 x 2.000 mm
Body and carriers 0.80 - 1.2 mm
It is long-lasting and durable.
The covers are double wing reinforced.
Number of Shelves: 7 Pieces
Shelf Carrying Cap .: 80 kg.

Variable drawer groups

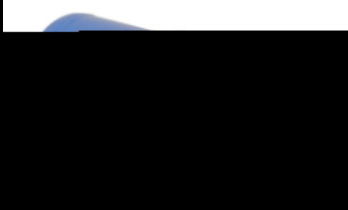	Galvanized shelves and uprights. Width: 750 mm Depth: 600 mm Height: 2.000 mm Drawer: 5 pcs.	
	Cast Body Leveler's Vise : 100 Mm Jaw Spacing : 100 mm Mouth Width: 125 Mm	
	Chassis Piston Air Compressor Engine Power: 5.5 hp Air Intake: 630 lt/min Revolution : 950 rpm Pressure : 12 bar Working Power : 380 V	
	Capacity : 300 lt. Working Pressure: 15 bar. Test Pressure: 15 Bar. Sheet Thickness: 4 mm. Compressor Connection : 1" Air Outlet : 1/2"	
	Hose Diameter: 10x15 Mm Hose Length: 20 Mt Working Pressure: 15 Bar Inlet and Outlet Dimension: 3/8" F - 3/8" M Automatic Rewind	Plastic outer casing steel swivel wall bracket It can be easily stopped by the end user thanks to the latched stop device. Size: 50x43.5x23.5 cm Weight: 8.3 Kg
	Capacity: 600 / 1.200 kg Lifting height: 10 mt Lifting speed: 10/5 m / min Rope length: 20 mt Engine power: 930 W Voltage: 220-50 V / Hz	



5 / 12

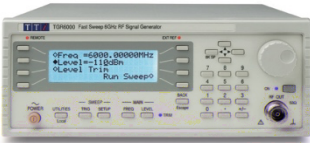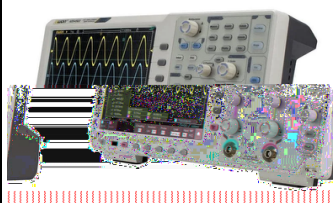	10MHz to 6000MHz Frequency Range 10Hz Stability, +/-1ppm Frequency Stability Lock to External Frequency Standard -110dBm to +7dBm Youth, 0.1dB Steps			Stores 15 gen. settings and 16 scan lists Convenient 2U half-rack that uses minimal bench space Full remote control via RS232, USB, LAN, and GPIB
	Max Volts: 60 V Max Amps: 20 A PowerFlex Regulation High Current at Low Voltage Outputs 1			Total Power Up to 840 Watts Model No: CPX400S
	Qualifies residential cabling systems to support CATV, 10/100/1000 Ethernet, voice and VoIP. Tests and troubleshoots all coax, data, and voice wiring. Model No: CIQ-100			Graphically maps wiring configuration and shows distance to faults with built-in TDR. Locates and traces cables with IntelliTone™ digital signaling technology. Reduces installation costs by eliminating callbacks and disputes.
	Weller WHS 81 Analog Soldering Station (80 W) PU 81 Power Unit Temperature Range 150°C - 450°C Comes with WSP 80 Handpiece and WPH 80 Soldering Iron Stand			Uses LT Series Tips
	Power Consumption: 750W Storage Temperature: 20~80°C Ambient Operating Tem.: 0~50°C Station Dimensions: 150x175x95 mm Station Weight: 2.95 kg Temperature Range: 200 ~480°C			High Efficiency Linear Torque-Speed Relationship High Torque-to-Volume Ratio Quiet Operation No Electrical Noise
	Number of Channels: 2 Bandwidth: 500 MHz Real-Time Sampling: 5 GS/s Memory Depth: 400 M Waveform Refresh Rate: 600,000 wfms/s			Vertical Resolution: 8 bits Timebase Range: 500 ps/div – 1000 s/div Trigger Types: Edge, video, pulse, slope, timeout, window, Nth edge, logic, UART, I2C, SPI, CAN Protocol Decoding: RS232, I2C, SPI, CAN

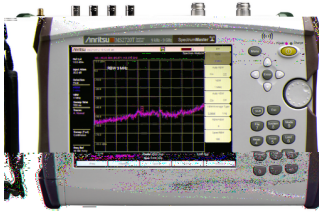	Measuring Range: -50 ~ 26 dBm Wavelength Range: 800-1700 nm Detector Type: InGaAs Calibrated Wavel.: 850/1650 nm. Display Resolution: Linear: 0.1%, Logarithmic: 0.01 dBm		Automatic Power-Off (min): 10 Power Supply: 1. 5V AA alkaline battery Low Battery Indicator: Low battery indicator approximately 3.3V, automatic power-off approximately 3V Model No : UT692G	
	Frequency range: 50MHz to 6GHz Bandwidth: 1.5MHz Meas.type: Peak and average power Power range: -60dBm to +20dBm Maximum power input: +23dBm Dynamic range: 83dB		Accuracy: $\pm 0.21\text{dB}$ Connector type: N-type VSWR: <1.5:1 Temperature range: 0°C to 55°C Power supply: 15VDC to 24VDC	
	Optical Fiber Length Range: 2~3km Infrared Wavelength: 650$\pm$10nm Optical Fiber Adapter: 2.5 mm FC Battery Type: 3.7V 1050mAh polymer lithium battery Laser Mode: Cont. mode/Pulse mode		Charging Voltage and Current: DC 5V, < 1A Key Press Test: > 5000 times Drop Test: 1m Power: 1050mAh rechargeable battery Net Weight: 62g Size: 130x38x27 mm	
	Frequency Range: 9 kHz to 13 GHz Dynamic Range: >106 dB in 1 Hz bandwidth at 2.4 GHz Input Atten.: 0 to 65 dB in 5 dB steps Amplitude Accuracy : $\pm 0.5\text{ dB}$ typical Frequency Ac.:Aging: $\pm 1.0\text{ ppm}/10\text{ yrs.}$		Accuracy: $\pm 0.3\text{ ppm}$ (25 °C $\pm$ 25°C) + aging -164 dBm/Hz (typ.) (1 GHz, preamp ON) Model No : MS2720T-0713	
	Series ZD 180 Thickness: 3 mm Length: 1.5 meters			
	Solder Wire Proskit solder wire It is a soldering wire developed for practical uses. Contains 63% SN. Weight: 17g, Wire diameter: 1.0 mm			

Alura Trailer
www.aluratrailer.com
sales@aluratrailer.com
Export :+90 544 242 04 94

Date: 19.08.2025
Prj No: 23.039
Offer: 23.039
Revision: 25.03

	Electronic Long Nose Pliers Set (4 Pcs) Electronic Round Nose Pliers Electronic Flat Nose Pliers Electronic Needle Nose Pliers Electronic Bent Needle Nose Pliers	
	Electronic Cutting & Pliers Set (4 Pcs) Electronic Diagonal Side Cutting Pliers Electronic and Cutting Pliers Electronic Long Nose Pliers Electronic Pliers	
	5 Lenses with Different Zoom Features Lens Magnification Rates: 1.0X, 1.5X, 2.0X, 2.5X, 3.5X	
	Tamper Resistance Set (7pcs) TR10 – TR15 – TR20 – TR25 – TR27 – TR30 – TR40	
	Material: Metal, PC. Usage: Folding magnifying lamp used for maintenance. 10-level illumination adjustment and 3-level color adjustment.	Desk lamp equipped with 10X magnifying glass.
	Crimping Size: 4-70 mm² Clamping Force: 45 Kn Clamping Type: Hexagon Opening Width: 10 mm Length: 310 mm Weight: 1.8 kg	



	Power: Input AC100-240V 50/60HZ, Output DC13.5V/4.8A Insertion Loss: 0.025dB (SM), 0.01dB(MM) 0.04dB (DS/NZDS) 5" TFT Screen: 5 inch It has a 800X480 high resolution	Provides up to 300x focus amplification. It has a 7800mAh battery. It charges in less than 4 hours and heats up approximately 200 times.
	Carrying Bag Fiber Cleaver Replacement Fusion Electrode cable stripping pliers, Fiber stripping pliers Allen key set ,	Fiber calibration template Strap for Carrying Bag, Charging Adapter Box for cleaning material Cleaning Brush, User guide



1	20 ft. NATO Container AMG	Alura	Turkey	1
2	Aluminum Shutters	Alura	Turkey	3
3	Hydraulic Loading System.	Alura	Turkey	1
4	Control Panel	Alura	Turkey	1
5	Grounding Reel	Mavel	Italy	1
6	Lighting	EAT	Turkey	6
10	Generator Diesel	Power	Turkey	1
11	Cable Roller	Mavel	Italy	1
12	Work Bench	Alura	Turkey	2
13	Metal Cabinet	Alura	Turkey	2
15	Clamp	İzeltaş	Turkey	1
16	Pistone Compressor	Aykom	Turkey	1
17	Air Tank	Alura	Turkey	1
19	Crane	Atlas	Kore	1
20	Telescopic Ladder	KEP	Turkey	1
21	Outdoor Lighting	CSR	Turkey	6
22	Multimeters	Uni-T	Italy	2
23	Laptop	Dell	EU	1
24	Monitor	Philips	EU	1
25	Network Test Machine	Uni-T	Italy	1
33	Power Sensor	Keysight	USA	1
#BAŞV!	#BAŞV!	#BAŞV!	#BAŞV!	#BAŞV!
#BAŞV!	#BAŞV!	#BAŞV!	#BAŞV!	#BAŞV!
#BAŞV!	#BAŞV!	#BAŞV!	#BAŞV!	#BAŞV!
#BAŞV!	#BAŞV!	#BAŞV!	#BAŞV!	#BAŞV!
#BAŞV!	#BAŞV!	#BAŞV!	#BAŞV!	#BAŞV!
#BAŞV!	#BAŞV!	#BAŞV!	#BAŞV!	#BAŞV!
#BAŞV!	#BAŞV!	#BAŞV!	#BAŞV!	#BAŞV!
34	Optical Fiber Tester	Uni-T	Italy	1
35	Spectrum Analyzer	Anritsu	Japan	1
36	Solder Cleaning Wire	Pros	Korea	2
37	Solder wire	Pros	Korea	2
38	Desoldering Pump	Goot	Korea	2
39	Soldering Aid Pliers.	Cnanrnanc	Korea	2
40	Solder Bag	Yayke	Turkey	2
41	Screwdriver	Izeltas	Turkey	4
42	Bits Screwdriver	Izeltas	Turkey	2
43	Bits Set	Izeltas	Turkey	2
44	Nose Pliers	Izeltaş	Turkey	2
45	Cutting & Pliers Set	Izeltaş	Turkey	2



46	Magnifying Lamp	Risegun	China	4
47	Screwdriver Torque	Izeltaş	Turkey	2
48	Magnifying Lamp	Risegun	China	4
49	Hydraulic Lug Crimping Pliers	Tork	Korea	2
50	Fiber Optic Cable Welding Machine	Signal	Taiwan	1
51	Fiber Optic Cable Welding Machine Set	Signal	Taiwan	1