

8-3 x Oil
Reel
15 mt.

24-Diesel
Reel
15 mt.

13-Waste
Oil
Reel
15 mt.

12-Diagram
Pump

23-Diesel
Pump

11-Gressa
Reel
15 mt.


19-Water
Reel
15 mt.


21-Air
Reel
15 mt.










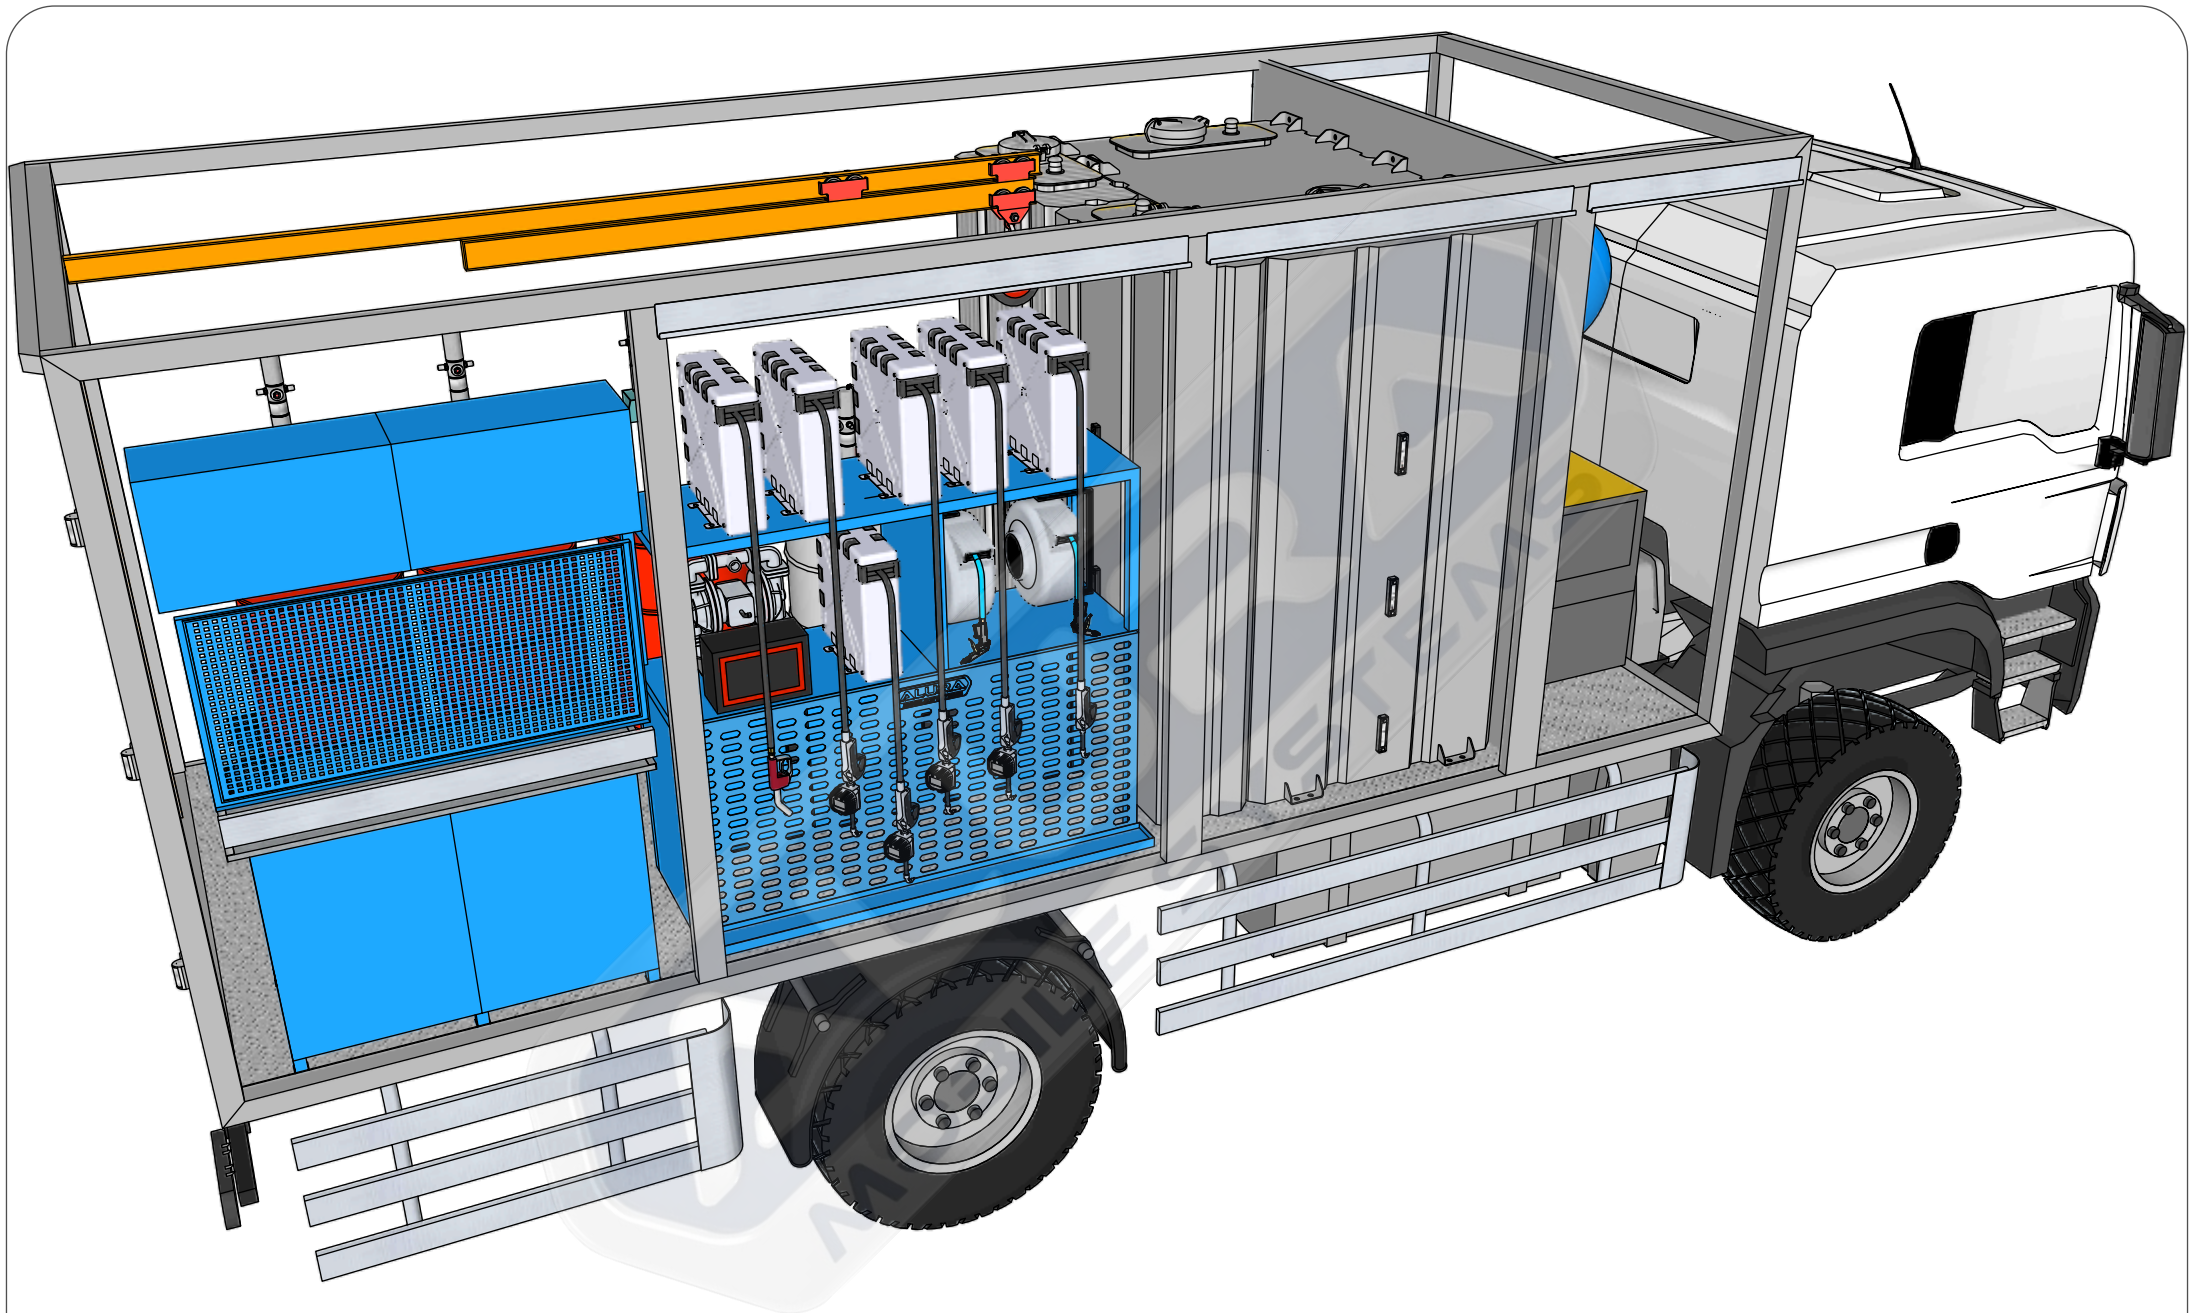

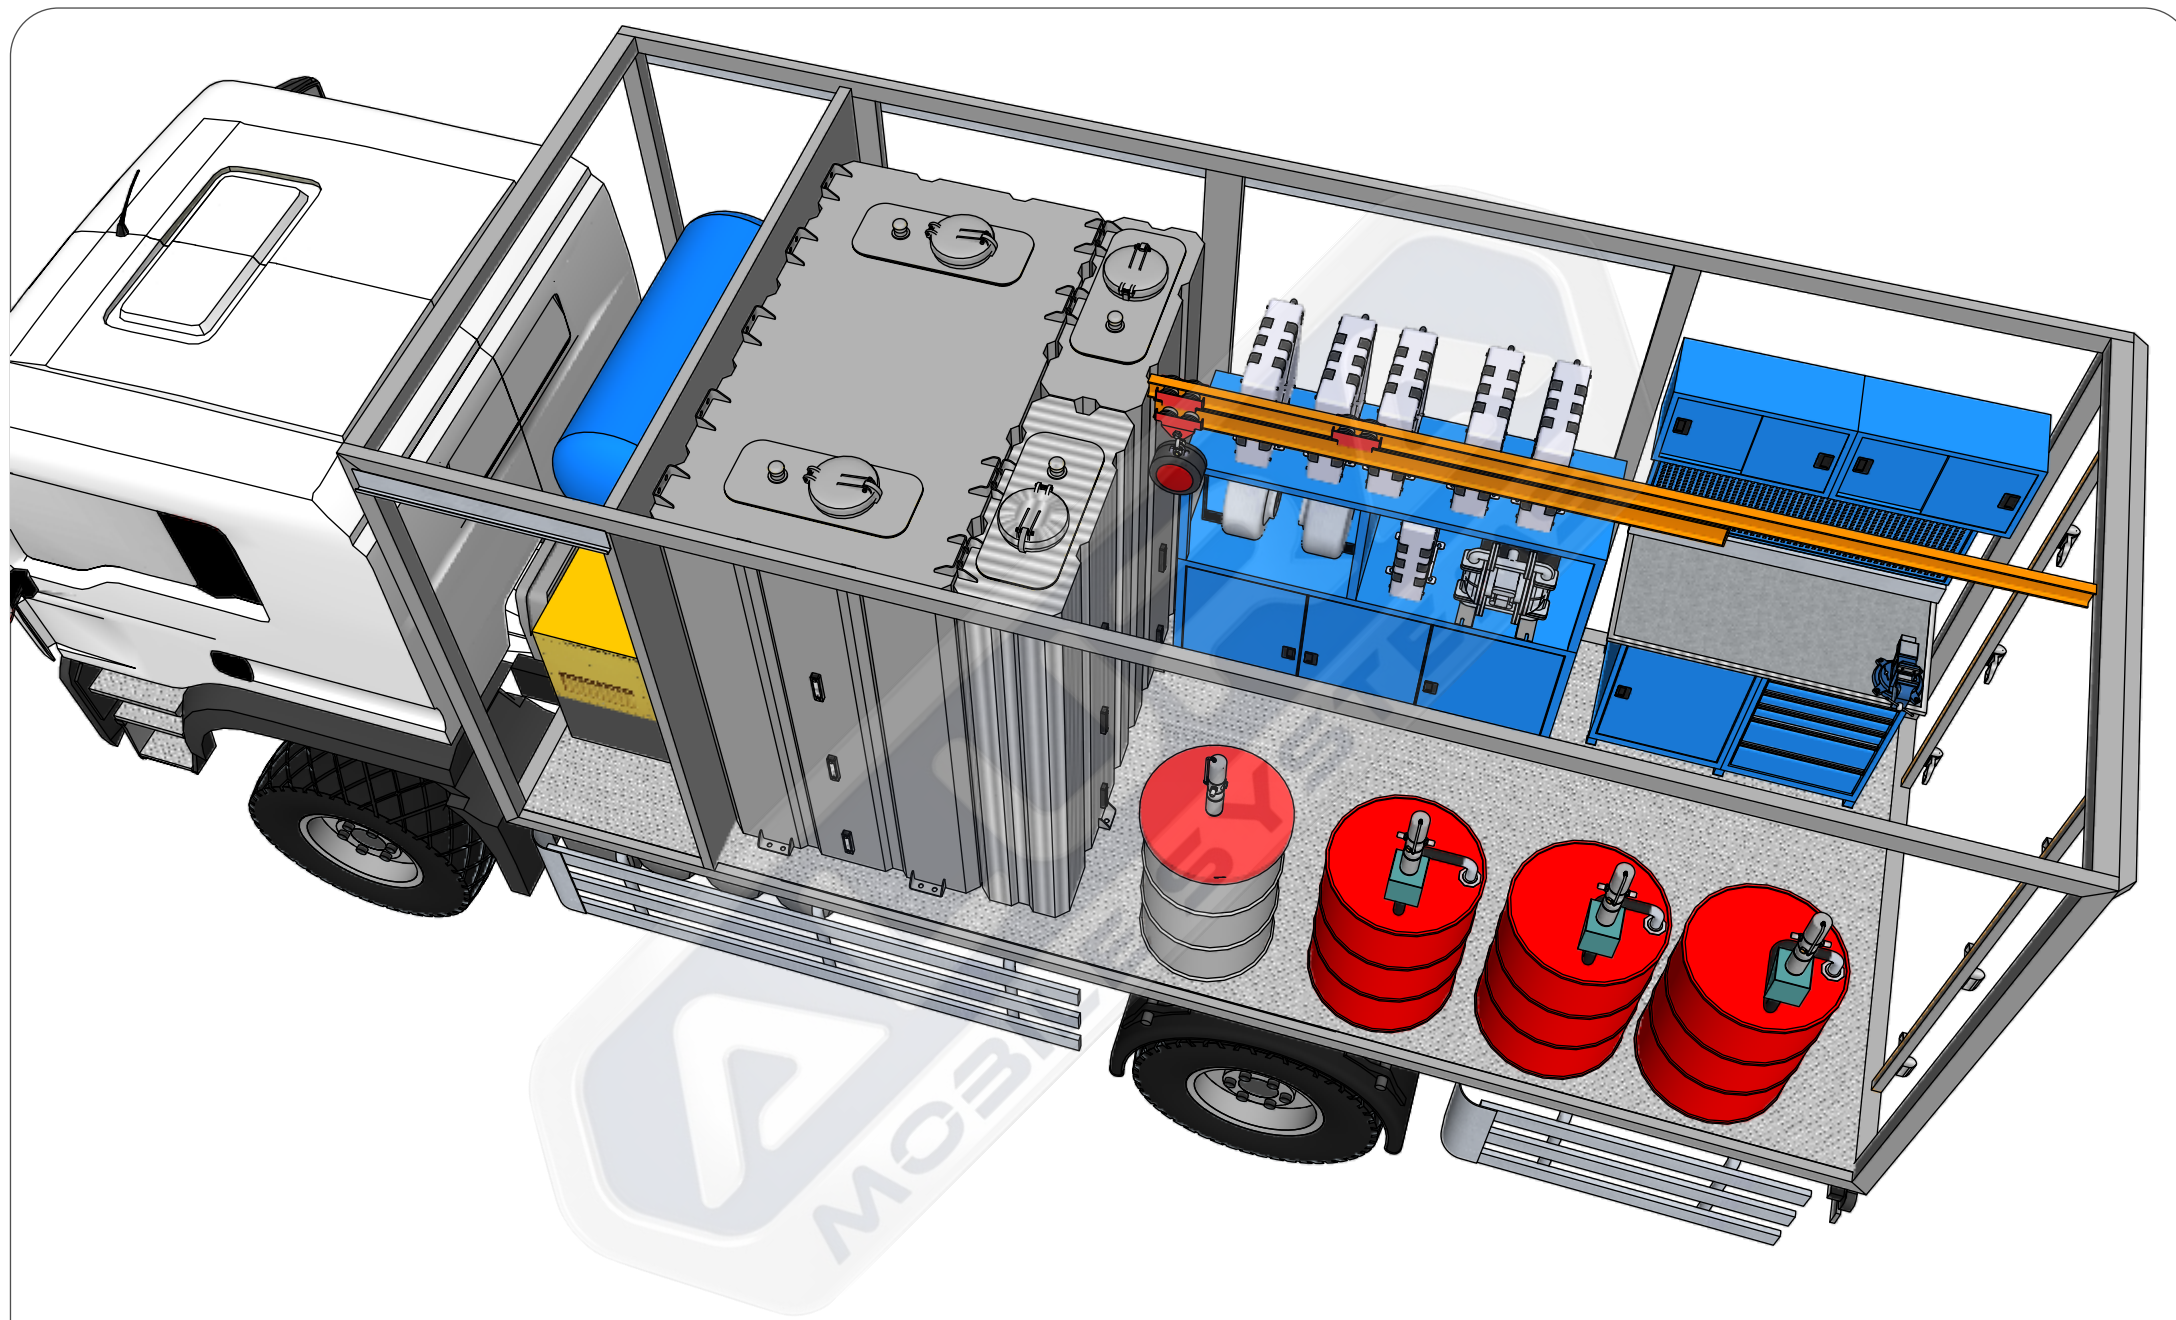

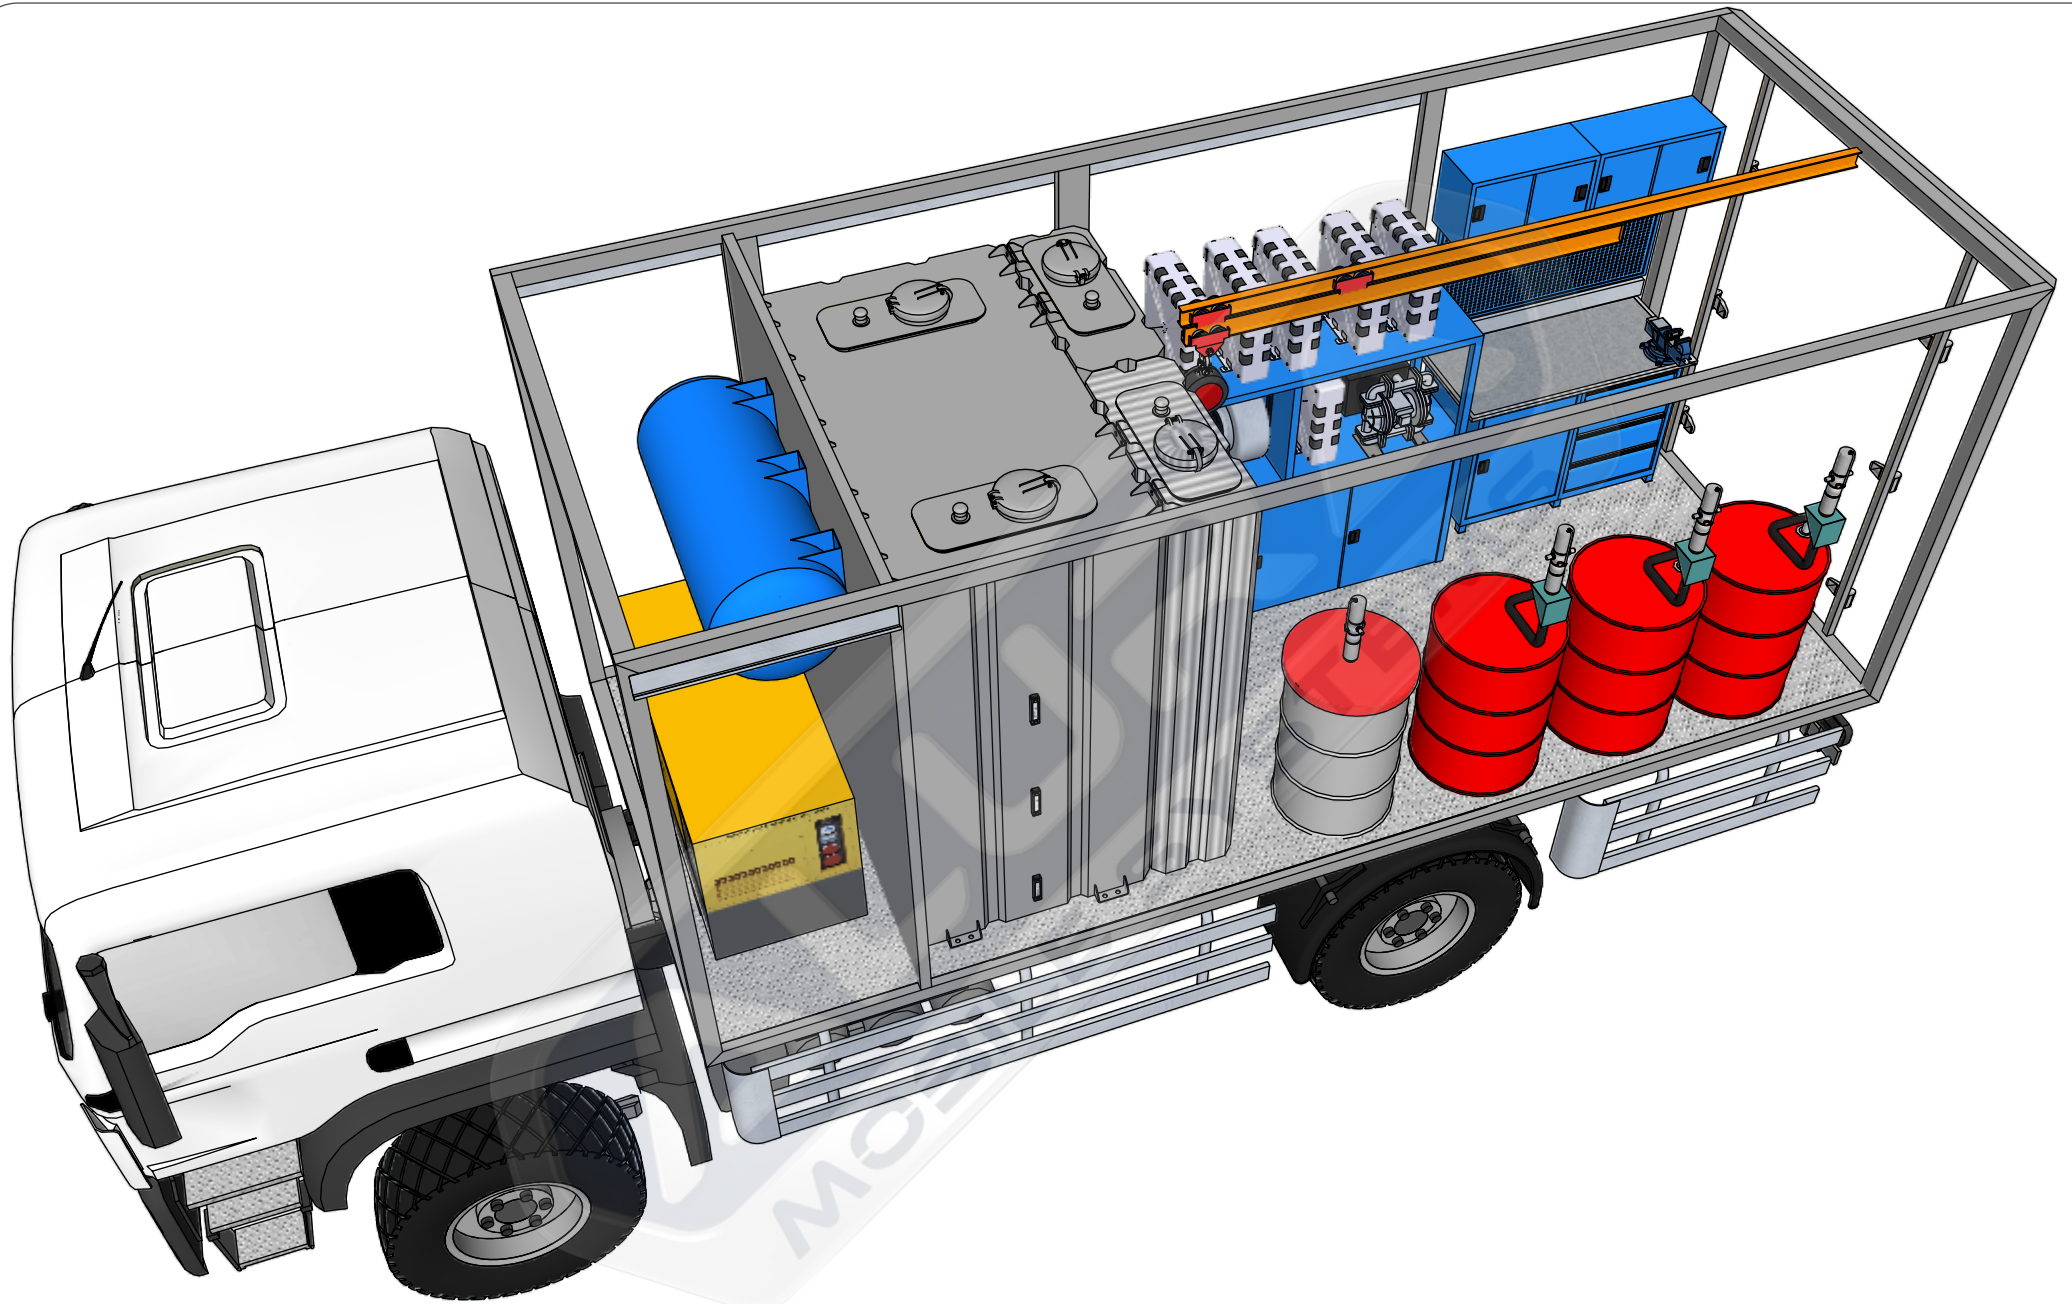


No	Equipment	Referans	Brand	Orijin	Piece
1	Lubrication Service	26.004	Alura	Turkey	1

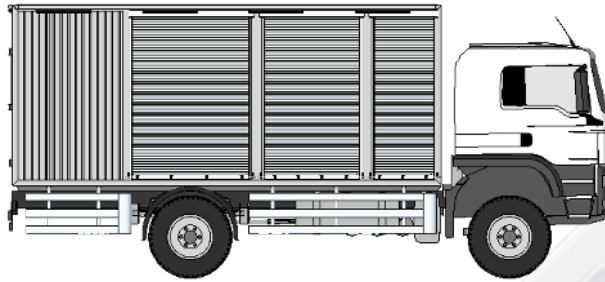

Dimensions / mm.	Length	6.000	Width	2.450	Height	2.550
------------------	--------	-------	-------	-------	--------	-------

Bodywork

MWS bent C type channel steel.
 Column sheets 3 mm. Panels 2 mm.
 Base cross members 80mm height 3mm.
 Base 18 mm Plywood.
 Sliding windows to usable areas.
 Stainless hinges and locks.



Sliding glass rear door.
 Monolithic crane connection channel to the body frame.
 Acrylic industrial chassis paint.
 Quick access rear bumper drawers.
 Metal parts are fixed to the chassis.

Outer Covering


Polyurethane Industrial Coating
 Resistant to chemicals.
 Hygienic, mold-proof, rust-proof and corrosion-proof.
 Retains its elasticity between 40C/200 C.
 Fire resistant CLASS A certificate.



Solvent-free, superior water resistance.
 Prevents damage that may occur as a result of impact.
 CE certified.

Insulation

Elastomeric Rubber
 Edges, Ceiling 18/40 mm.
 Provides high performance thermal insulation with its low thermal conductivity structure.
 Has a high water vapor diffusion



Used in system solutions with high condensation risk.
 Increases energy amount.
 Protects against pressure fluctuations.
 Unaffected by mold and microorganisms, antimicrobial.

Control Panel







Center control panel.
 Generator and compressor areas are quickly accessible cover.
 Electrical cables are hidden inside the insulated chassis.
 Cables in protective plastic sheath.















Polyurethane hose in air line duct.
 Mains Electricity Connection Input.
 Perimeter and interior lighting 220v.







Finishing






No	Equipment	Picture	Specifications	Reference	Brand	Orijin	Pcs
2	Diesel Compressor		Working Pressure: 7 bar. Air Delivery: 2.1 m3/min Motor: Kubato / D722 Standby Speed:1,800 rpm. Working Speed:3,800 rpm. Weight: 500 kg.	U 110	Atlas Copco	Italy	1
3	Air Tank 300 lt.		Capacity : 300 lt. Working Pressure: 15 bar. Test Pressure: 15 Bar. Sheet Thickness: 4 mm. Compressor Con. : 1" Air Outlet : 1/2"	ALR4 50/300	Alura	Turkey	1
4	Work Bench		Work Bench Width: 1.200 mm Depth: 700 mm Height: 2.000 mm Number of Drawers: 10 Drawer Carrying Capacity: 60 kg.	ALR11120	Alura	Turkey	1
5	Filter Cabinet		Tree door WxDxH: 920x450x900 mm Sliding shelves. Waste oil tray. To be manufactured as a custom order.	ALR11920	Alura	Turkey	1
6	Aluminum Shutters		Manuel Working Locking Systems Size : 100x230 cm 2 pcs. 170x230 cm 1 pcs.	CLK100230	Celiksın	Turkey	3
7	Oil Pump		Pneumatic pumps for oil Flow rate: 18 l / min Air working pres.: 6/8 bar Av. air con.: 230 l / min Noise level: 81 dB Oil viscosity: 80 SAE	36096	Raasm	Italy	3

No	Equipment	Picture	Specifications	Reference	Brand	Orijin	Pcs
8	Oil Reel 15 mt.		Pressure: 150 bar Length: 15 mt Compatible fluids: Oils Material: Painted Steel Inlet-Outlet : G 1/2-G 1/2 Pressure-Size:1/2"160 bar	9430.430	Raasm	Italy	3
9	Oil Gun		Flu: Technopolymer Digital meter: Yes Inlet swivel joint: G 1/2 f Filter: Yes Level locking button: Yes	37758	Raasm	Italy	3
10	Grease Lubrication Kit		Grease disp. kit Ratio: 50:1 Flow rate: 1500 g/min Av. air conmsp.: 330 l/min Noise level: 81 dB Weight: 4.6kg Grease guns	64195	Raasm	Italy	1
11	Grease Reel 15 mt.		Pressure: 400 bar. Hose Length: 15 mt. Compatible fluids: Water Swivel joint: Stainless Metal Characteristic: Fixed Material: Painted steel	995.518	Raasm	Italy	1
12	Waste Oil Diagram Pump		Flow rate: 70 l / min Max pressure: 8 bar. Max cic. for min.: 400cpm. Max working temp.: 100°C Noise level: 70 dB. Air working pressure: 2/6 Bar.	33.2011TPT	Raasm	Italy	1
13	Waste Oil Hose Reels 15 mt.		Pressure: 20 bar Length: 15 mt Compatible fluids: Oils Material: Painted Steel Inlet-Outlet : G 1/2 - G 1/2 Pres. Size: 1/2"-160 bar	9430.104	Raasm	Italy	1

No	Equipment	Picture	Specifications	Reference	Brand	Orijin	Pcs
14	Waste Tank 1.000 Lt.		Volume: 1000 Lt Metal prism tank Occupancy indicator Filler caps Pump stabilizer Discharge 1" valve	ALR221000	Alura	Turkey	1
15	Water Reel 15 mt.		Pressure: 20 bar. Hose Length: 15 mt. Compatible fluids: Water Swivel joint: Stainless Metal Characteristic: Fixed Material: Painted steel	995.518	Raasm	Italy	1
16	Water Tank 1.000 Lt.		Capacity : 1000 Ltr Made of Stainless : 2 mm Level Indicator : Manuel Filling tap : 1" Pump stabilizer : 1" Discharging valve : 1"	ALR21500	Alura	Italy	1
17	Air Reel 15 mt.		Hose Length:20mt. 10x15mm Working Pressure: 15 Bar Inlet and Outlet Dim.: 3/8" Automatic Rewind Steel swivel wall bracket Weight: 8.3 Kg	880100	Mavel	Italy	1
18	Digital Tire Inflation Gauge		Protective rubber bumper Aluminum body Long and accurate use Fast and easy to use Simimline biomorphic body shape provides greater comfort for the user	MK4	PCL	England	1
19	Diesel Pump		Flow rate: 45 lt/min Power: 24 V Suction distances: 50 mt. Pressing distances: 30 mt. Gun : Automatic fuel gun.	Cube 56	Piusu	Italy	1

No	Equipment	Picture	Specifications	Reference	Brand	Orijin	Pcs
20	Diesel Reel 15 mt.		Pressure: 20 bar. Hose: 15 mt Compatible fluids: Diesel Seals: Polyurethane Material: Painted steel Inlet - Outlet: G 1" - G 1"	8540.603	Raasm	Italy	1
21	Diesel Tank 5.000 lt.		Material: ST 37 Carbon Steel Capacity: 5,000 lt. Sheet Thickness: 4 mm Fuel Output: 1 inch Level indicator Manhole Covers: 600 mm	ALR225000	Alura	Turkey	1
22	Outdoor Lighting		Operating : DC 24/15V Current strength: 1.4 A Light Source: 3W 12pcs. LENS Feature: 25° LENS White:5000-7000K Polycarbonate plastic black aluminum profile	CSR24.800	CSR	Turkey	5
23	Lighting		Watt: DC 24/15V Light Flux: 1800 Lm Dim Feature: Fixed Driver Product Life: 25000 H Color Temperature: 4000K IP Protection Class: IP65	WT066C	Philips	Turkey	6
24	Air Regulator		Air Inlet : 1/2" Filter : 20u Working Pres.: 05-9.9 atu Operating Temp.: 5-60°C Water Capacity: 80 ml Air Permeability: 2200 lt/min	OPT3042FR	Osaka	Japan	1
25	Pneumatic Water Trap		Working Pres.:1-70 kg/cm ² Max. Working: 400 lt/min Max. Pressure: 14 bar Fluid Temperature: 5-60° C Inlet Connection: 1/2" Moisture Separation: 96% Weight: 0.70 kg	OPT-P1000	Osaka	Japan	1

No	Equipment	Picture	Specifications	Reference	Brand	Orijin	Pcs
26	Crane		Capacity: 1 Ton Lifting Height: 5 mt. Chain Thickness: 6 mm. Test Load: 1,250 kg. Weight: 11.8 kg.	ATCK 13	Atlaspro	Turkey	1
27	Fire Extinguisher		ABC Grade Fire Ext. Powder 6 Kg Capacity MAP Rate 40% Body made of A1 7114 Quality Plastered Sheet 18 Bar Working Pressure Mic.Electro Static Paint.	STR1806	Star	Turkey	3

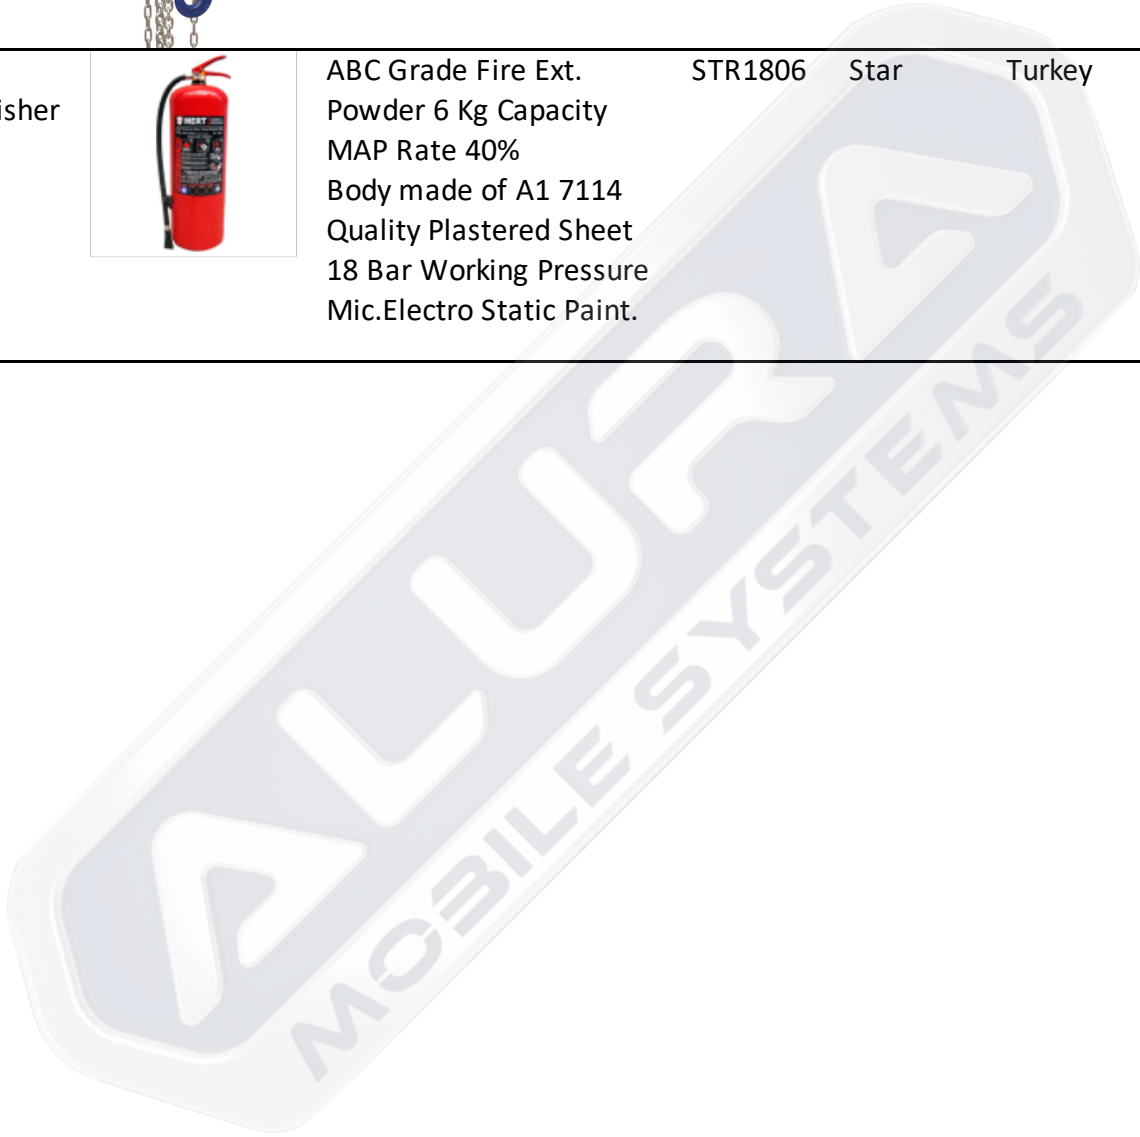



No	Equipment	Reference	Brand	Orijin	Piece
1	Lubrication Service	26.004	Alura	Turkey	1
2	Diesel Compressor	U 110	Atlas Copco	Italy	1
3	Air Tank 300 lt.	ALR450/300	Alura	Turkey	1
4	Work Bench	ALR11120	Alura	Turkey	1
5	Work Bench	ALR11120	Alura	Turkey	1
6	Aluminum Shutters	CLK100230	Celiksan	Turkey	3
7	Oil Pump	36096	Raasm	Italy	3
8	Oil Reel 15 mt.	9430.430	Raasm	Italy	3
9	Oil Gun	37758	Raasm	Italy	3
10	Grease Lubrication Kit	64195	Raasm	Italy	1
11	Grease Reel15 mt.	995518	Raasm	Italy	1
12	Waste Oil Diagram Pump	33.2011TPT2	Raasm	Italy	1
13	Waste Oil Hose Reels 15 mt.	9430.104	Raasm	Italy	1
14	Waste Tank 1.000 lt.	ALR221000	Alura	Turkey	1
15	Water Reel15 mt.	995.518	Raasm	Italy	1
16	Water Tank 1.000 lt.	ALR21500	Alura	Italy	1
17	Air Reel 15 mt.	880100	Mavel	Italy	1
18	Digital Tire Inflation Gauge	MK4	PCL	England	1
19	Diesel Pump	Cube 56	Piusu	Italy	1
20	Diesel Reel 15 mt.	8540.603	Raasm	Italy	1
21	Diesel Tank 5.000 lt.	ALR225000	Alura	Turkey	1
22	OutdoorLighting	CSR24.800	CSR	Turkey	5
23	Lighting	WT066C	Philips	Turkey	6
24	Air Regulator	OPT3042FRL	Osaka	Japan	1
25	Pneumatic Water Trap	OPT-P1000	Osaka	Japan	1
26	Crane	ATCK 13	Atlaspro	Turkey	1
27	Fire Extinguisher	STR1806	Star	Turkey	3