






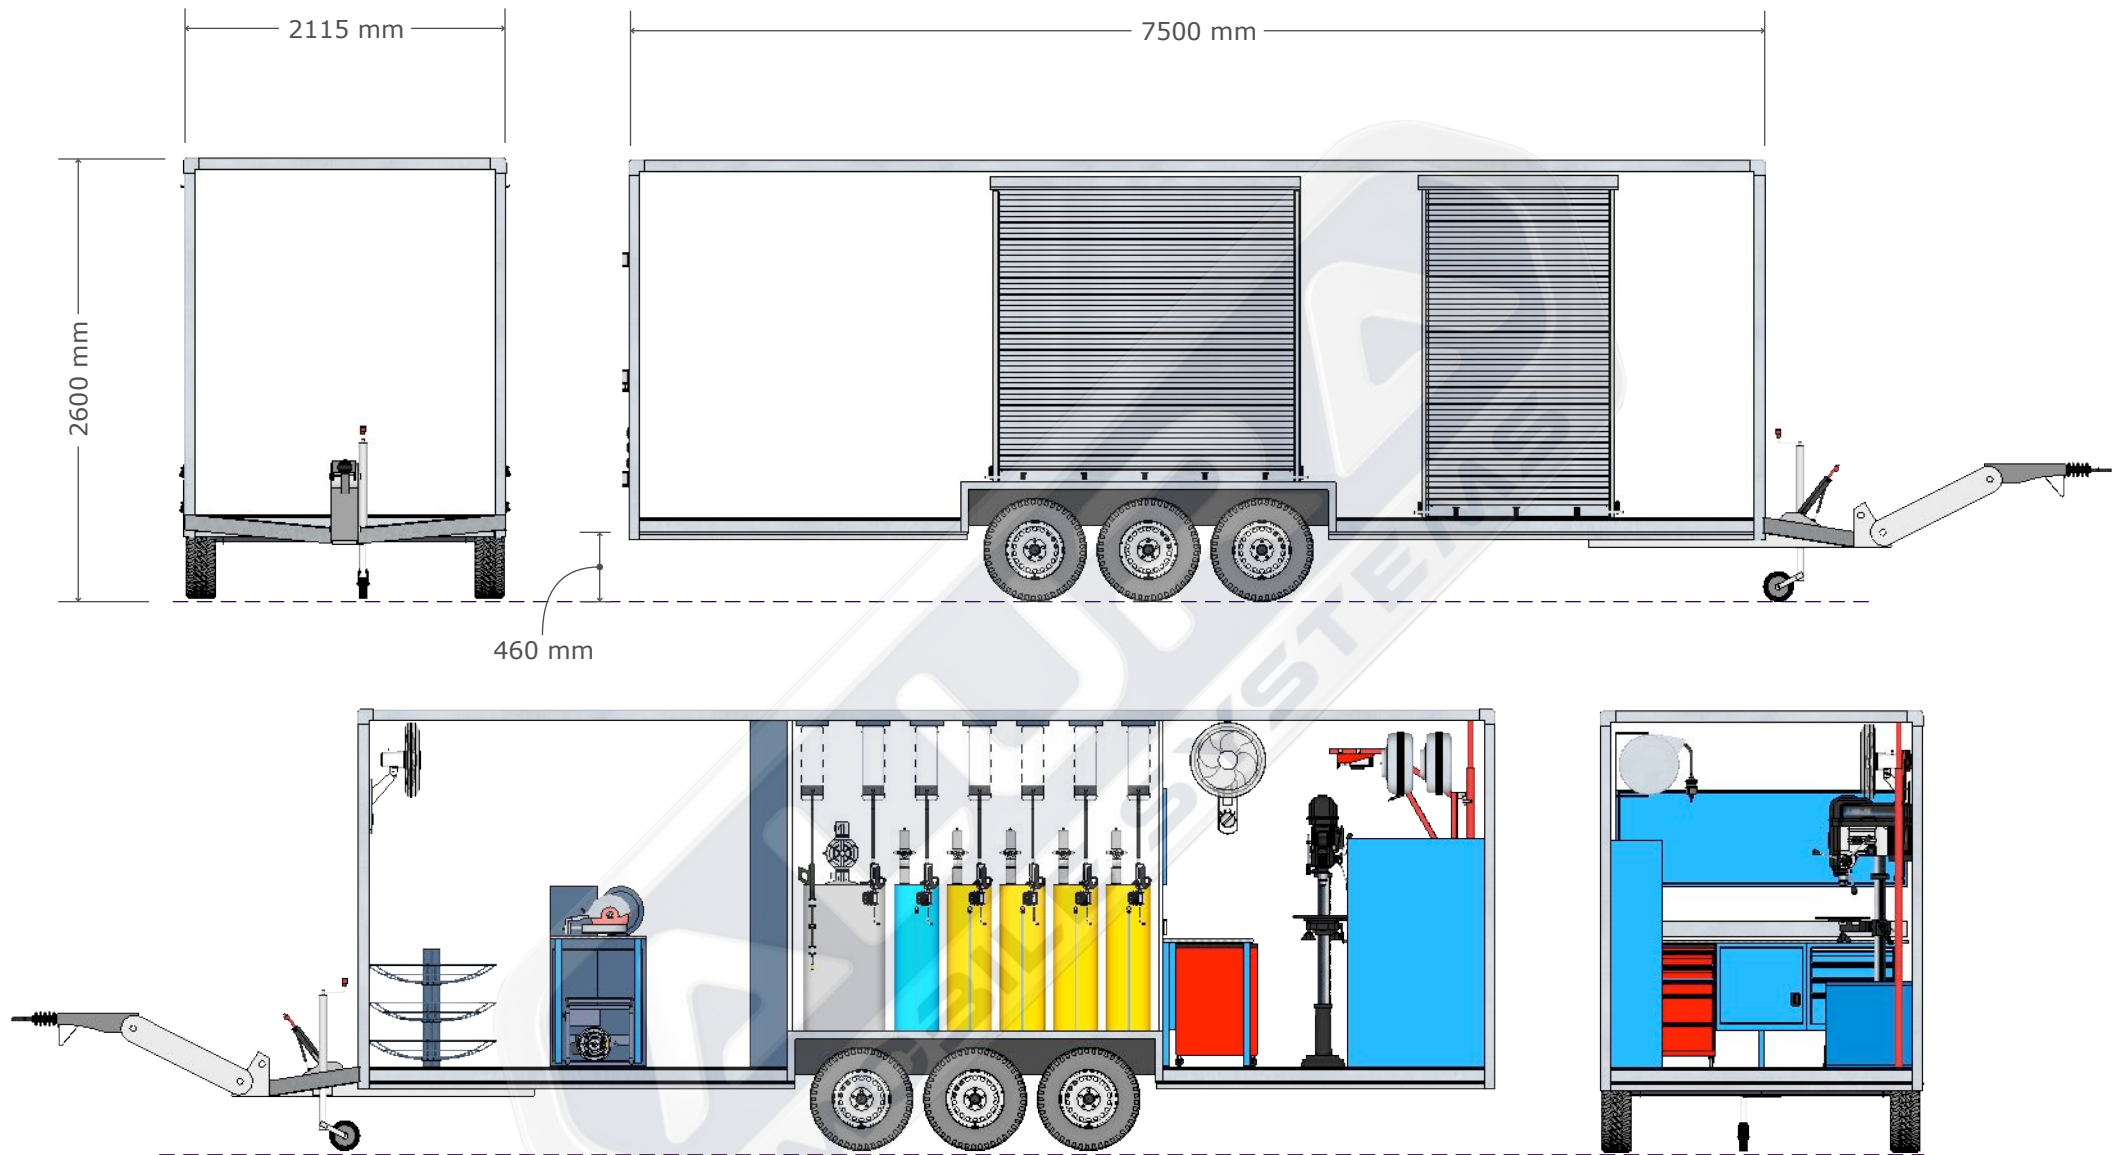

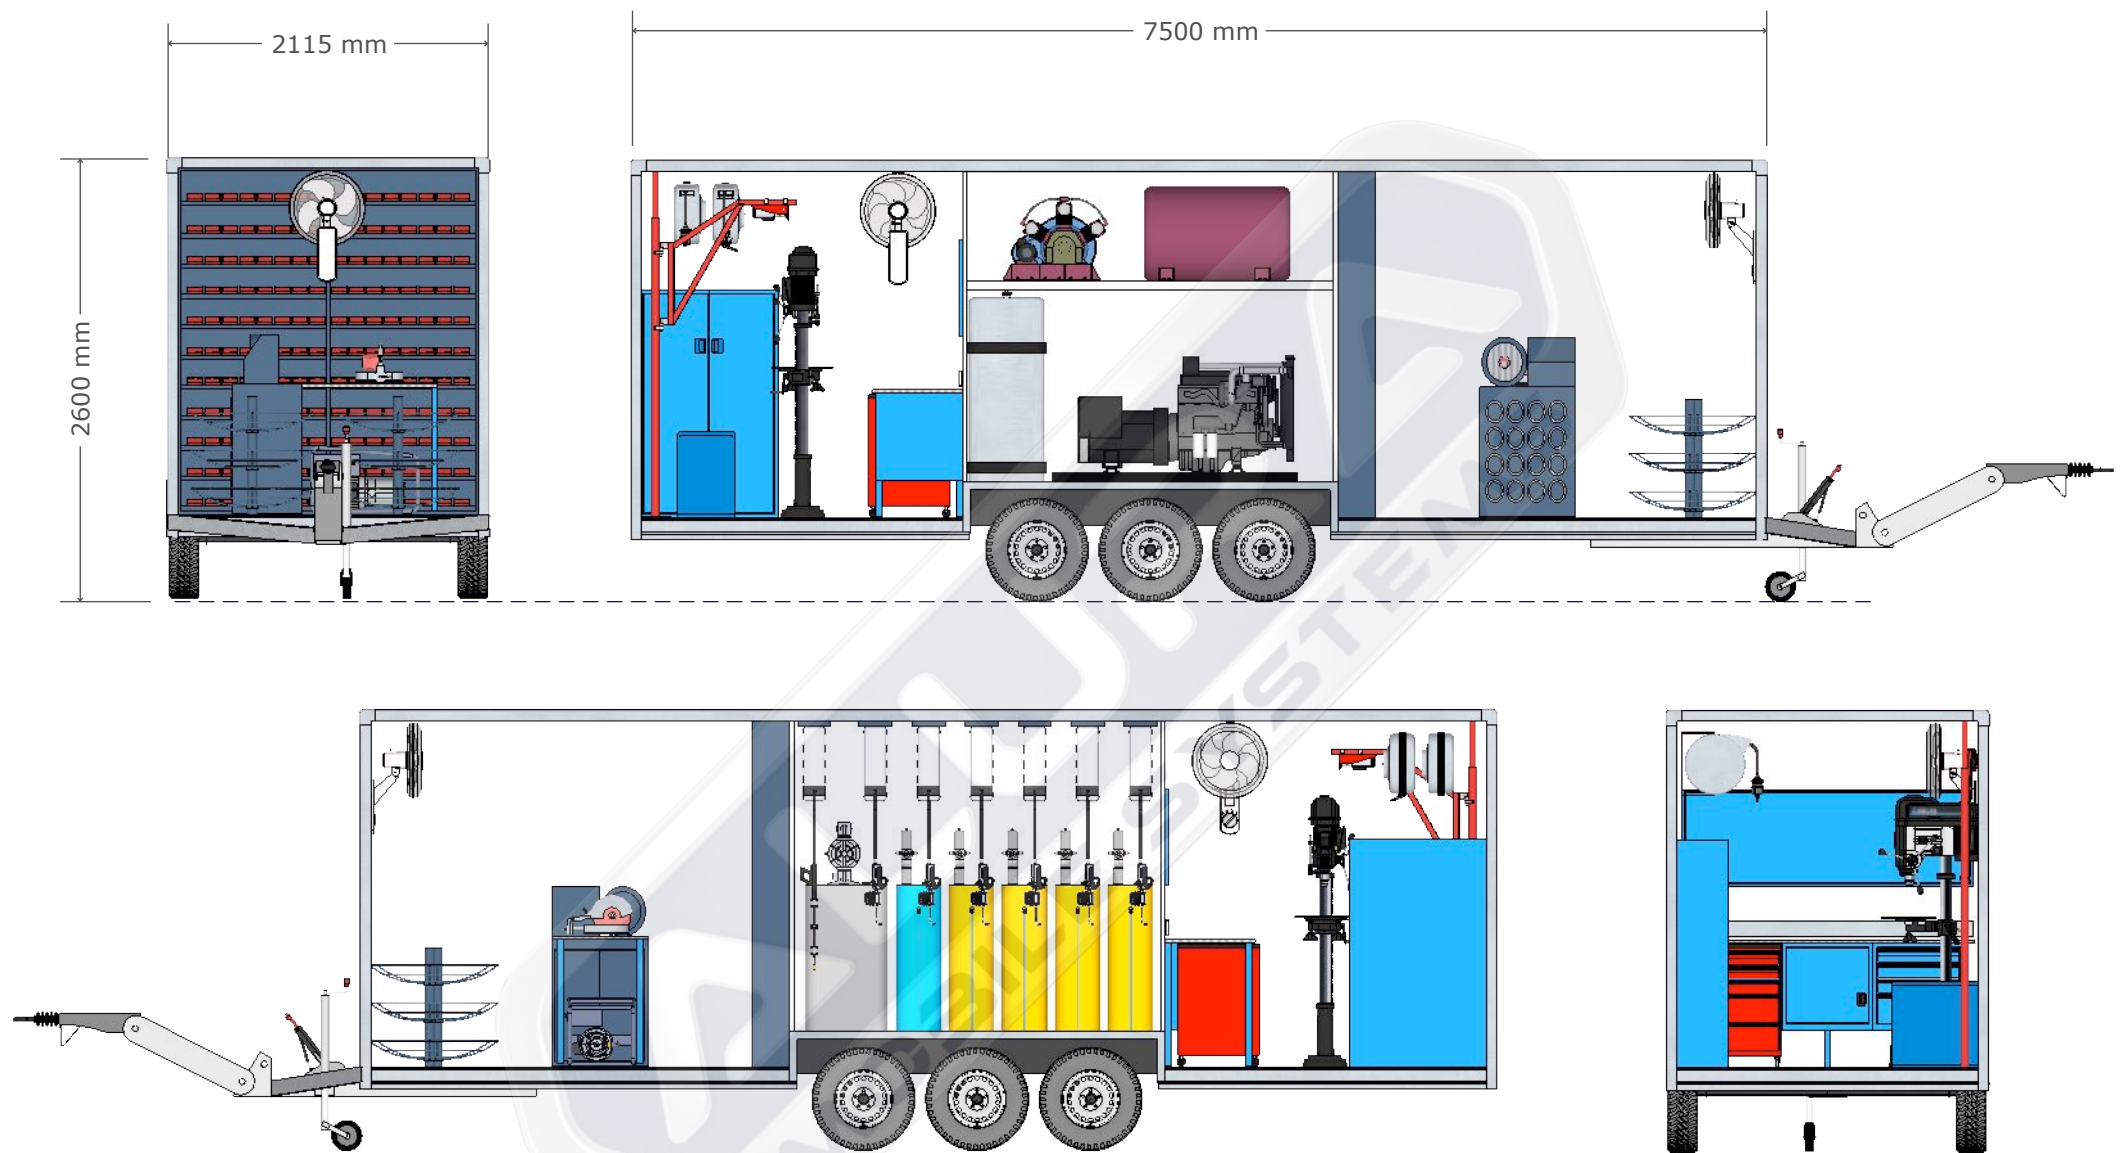


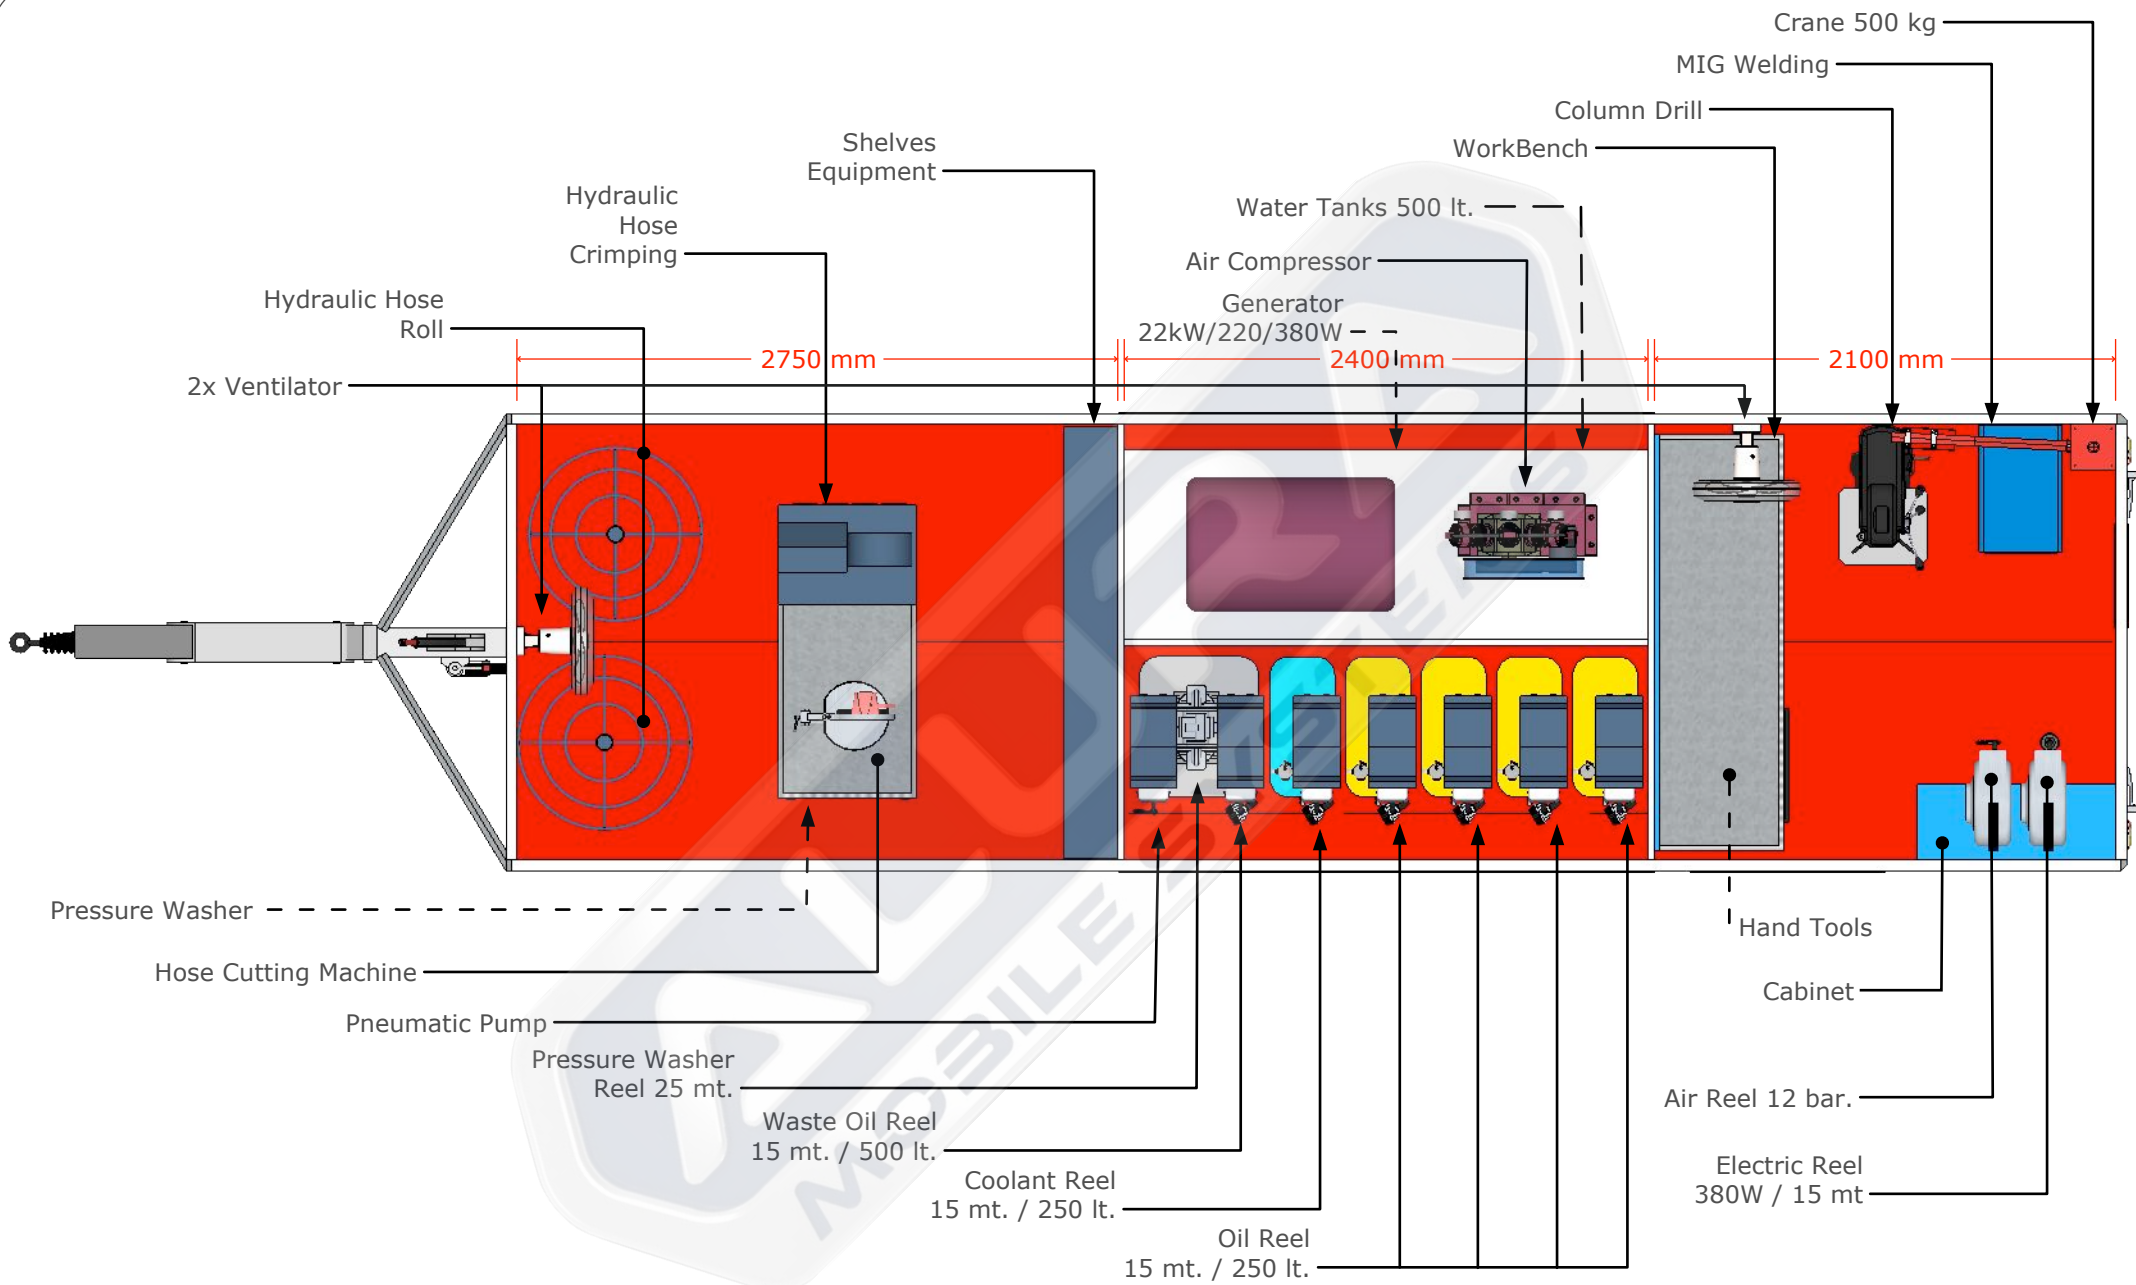


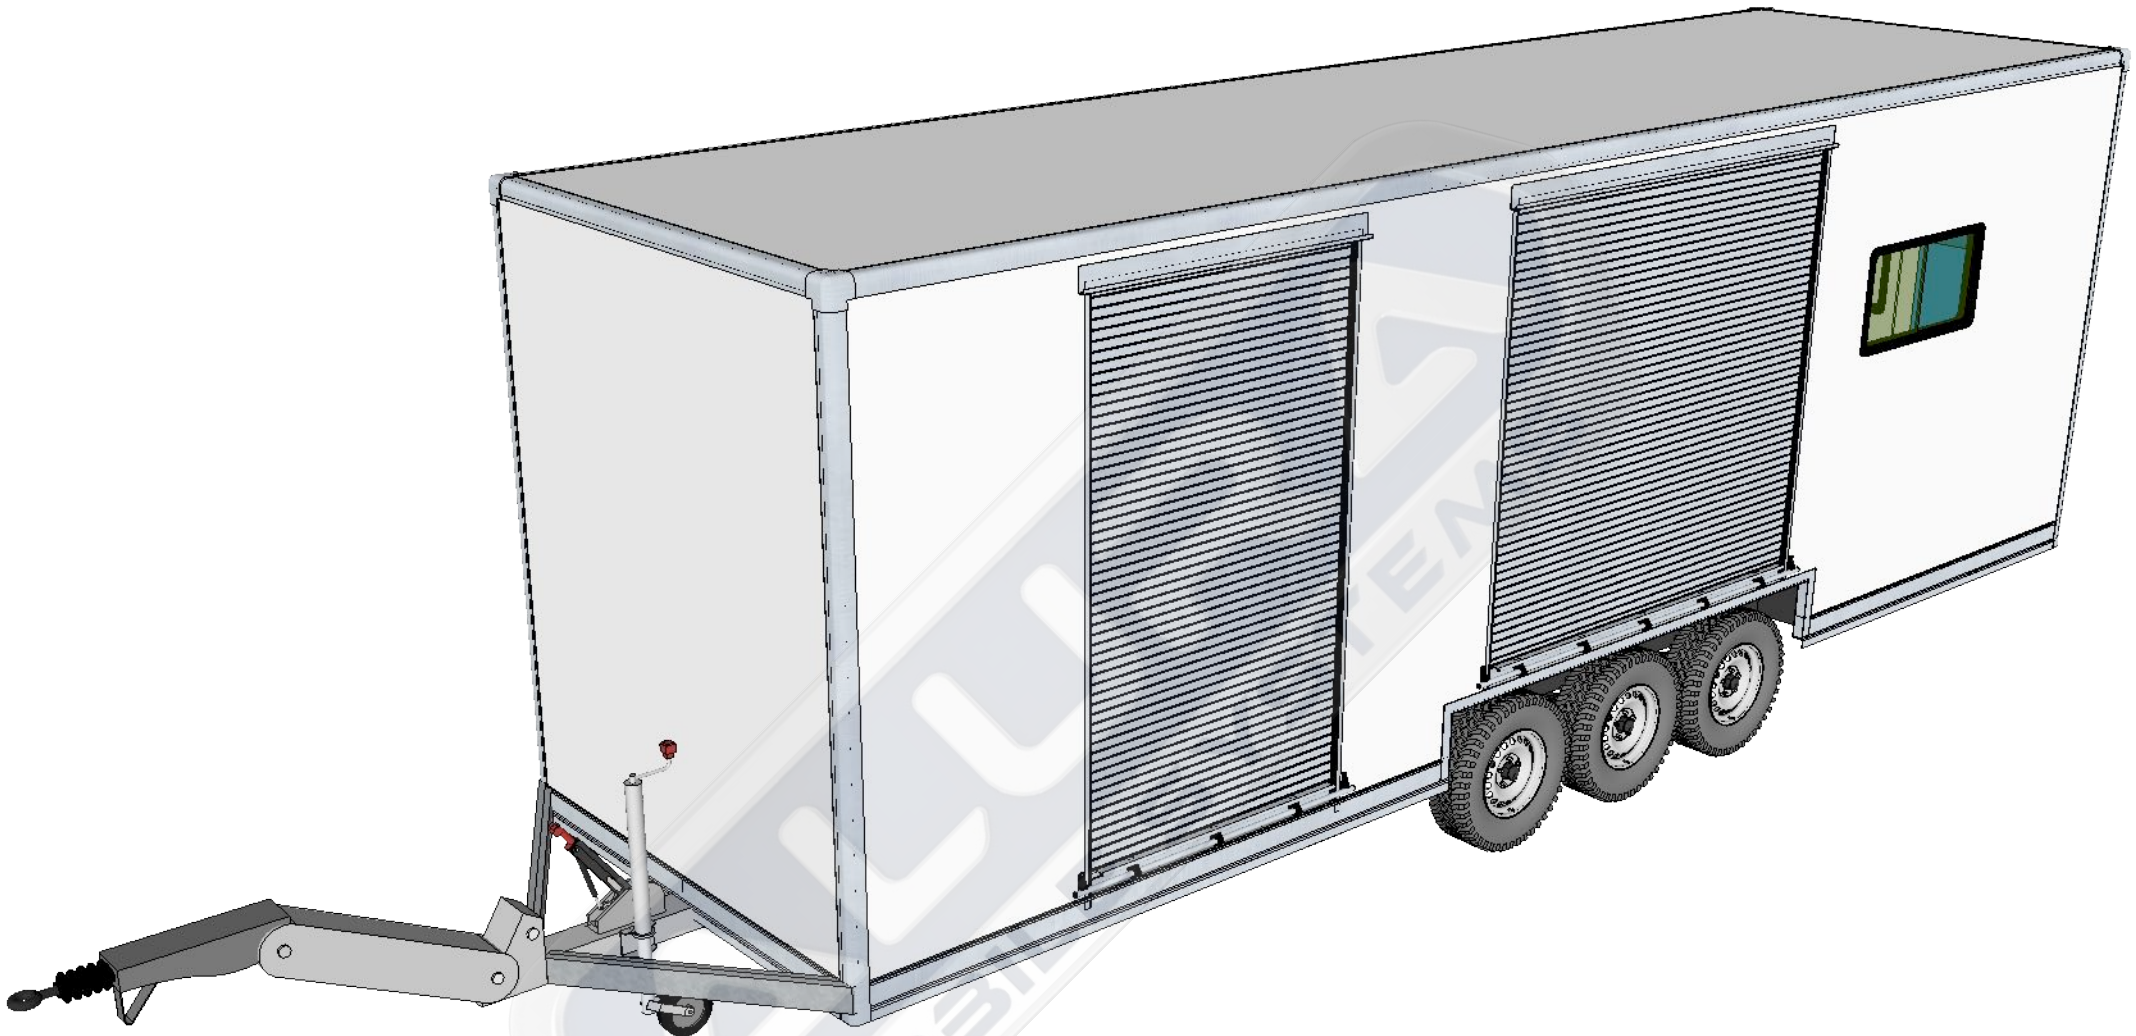


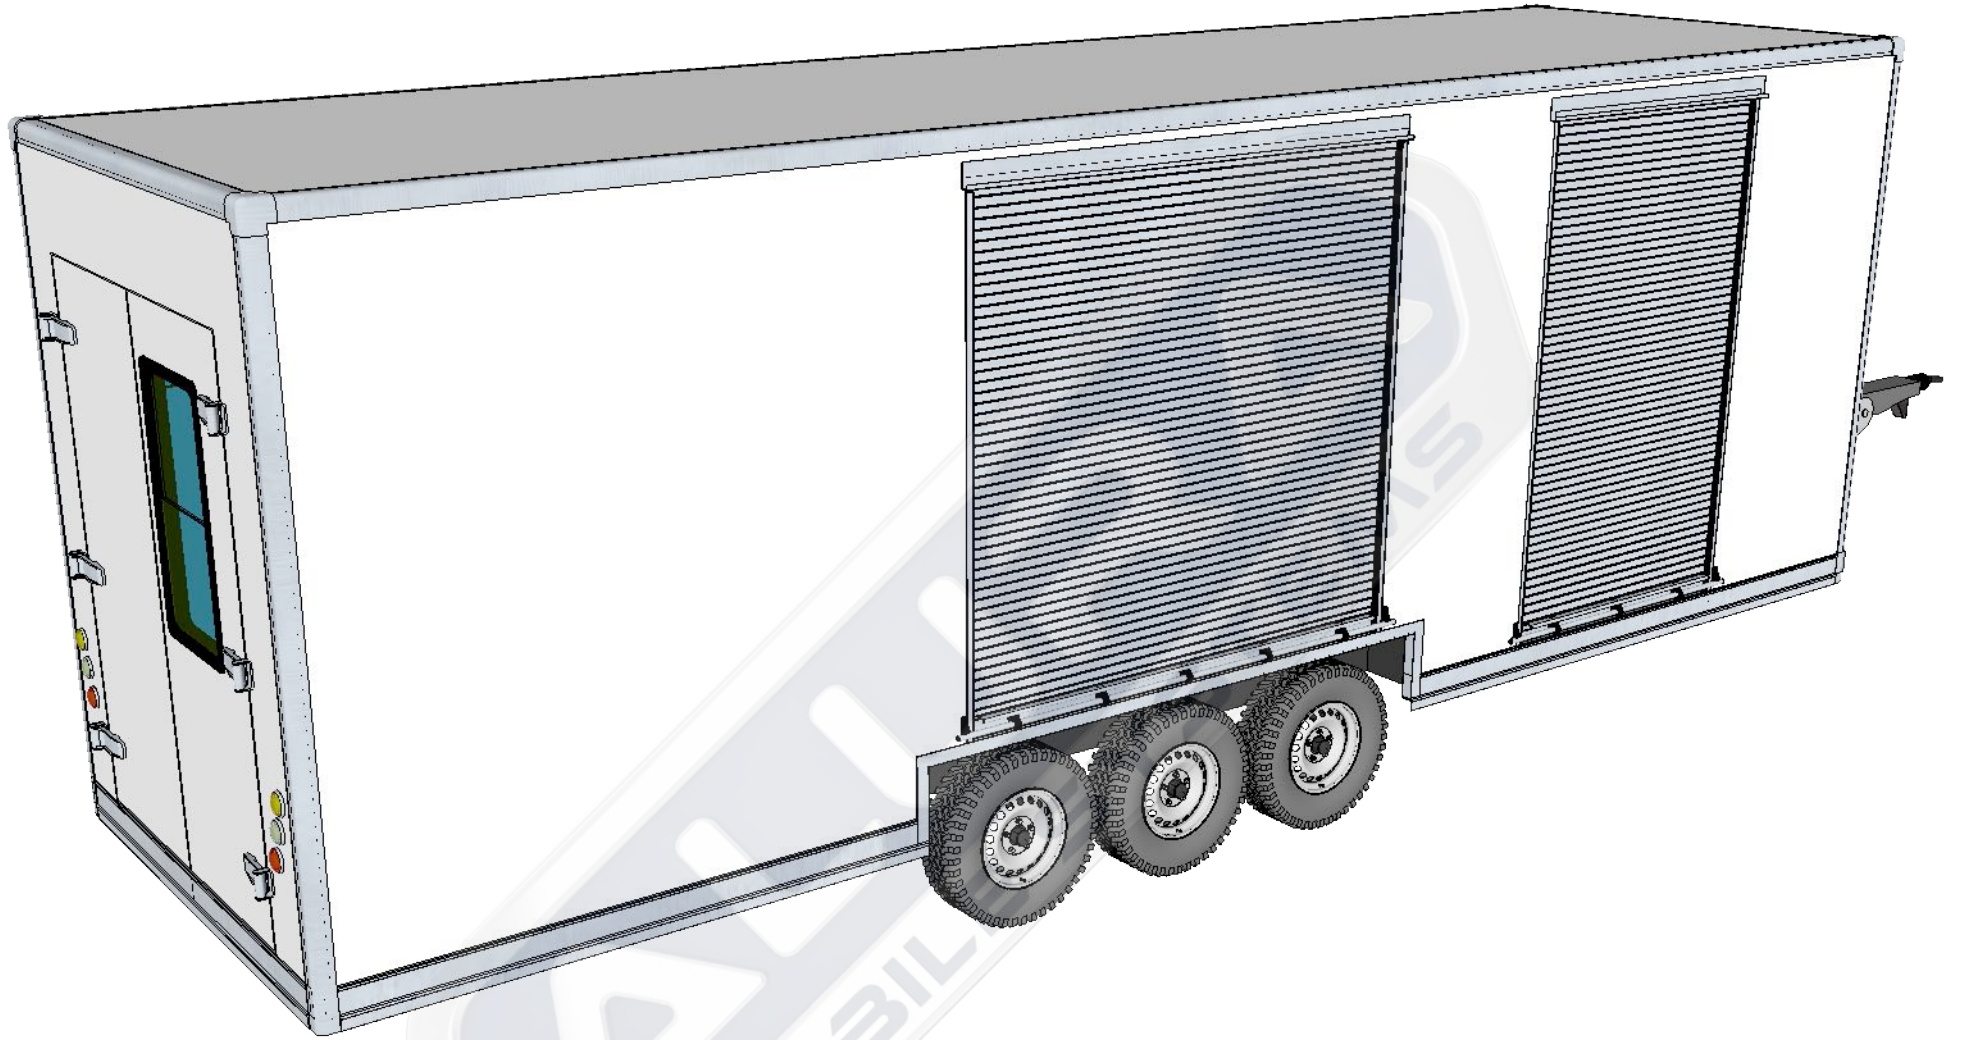






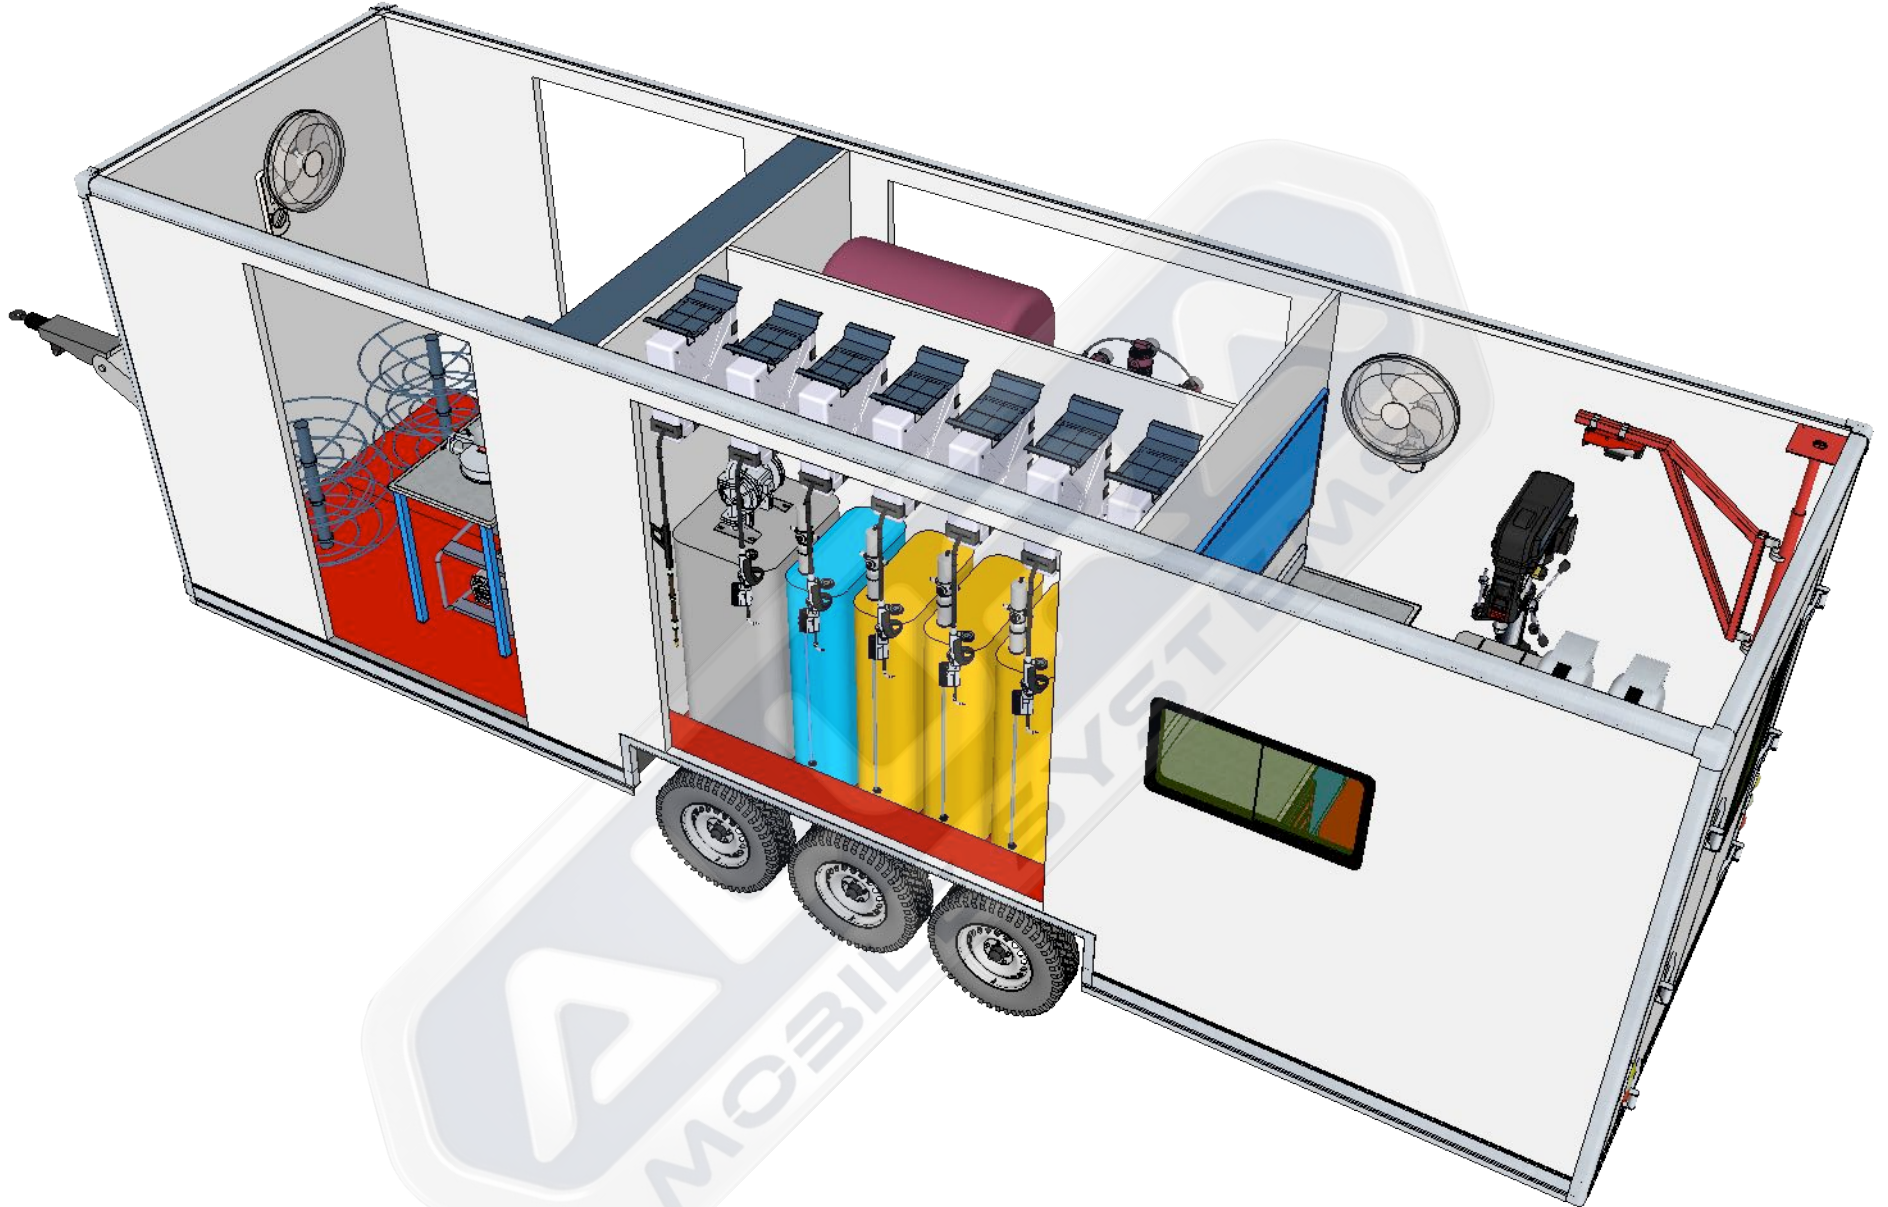

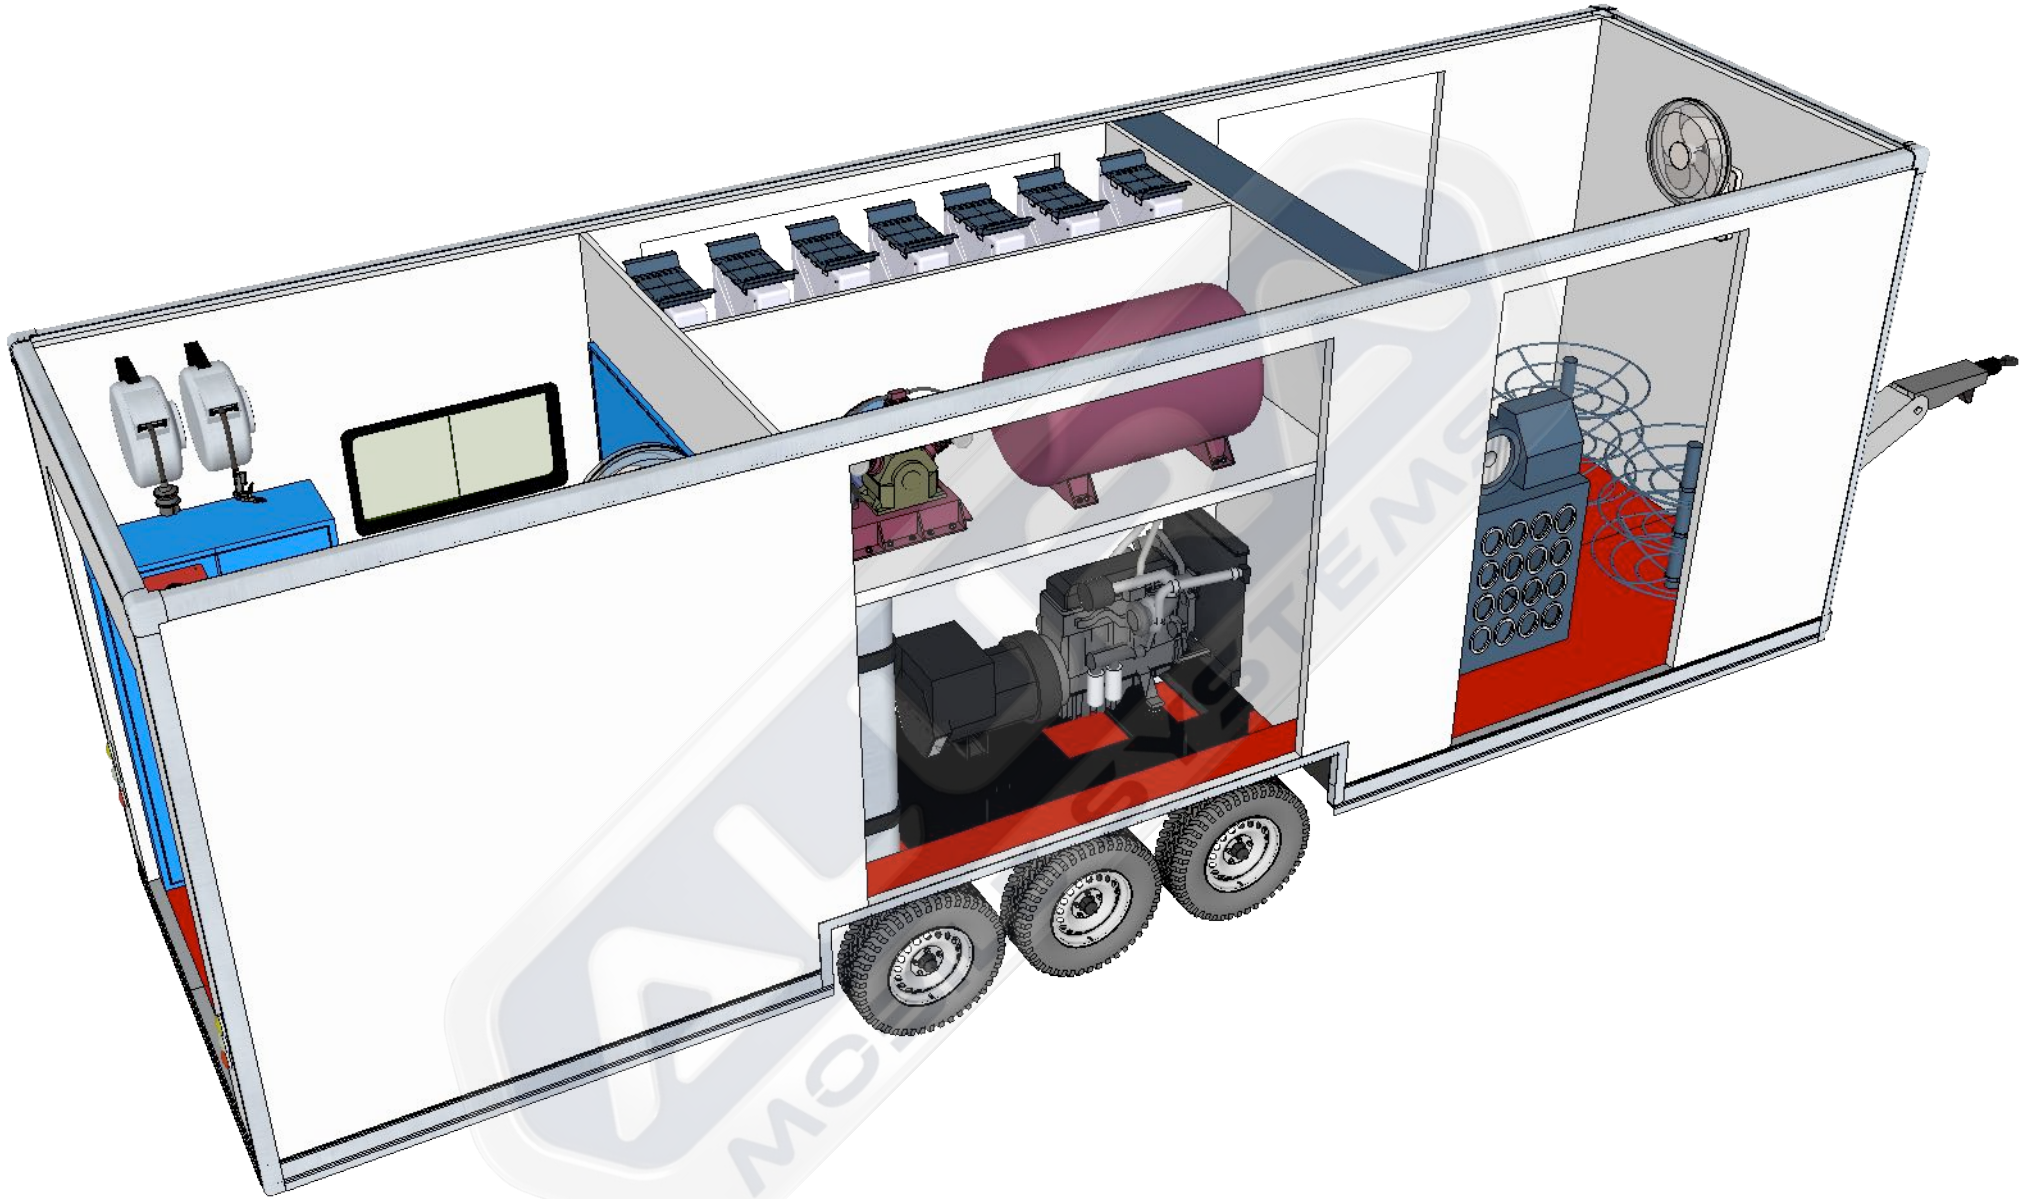

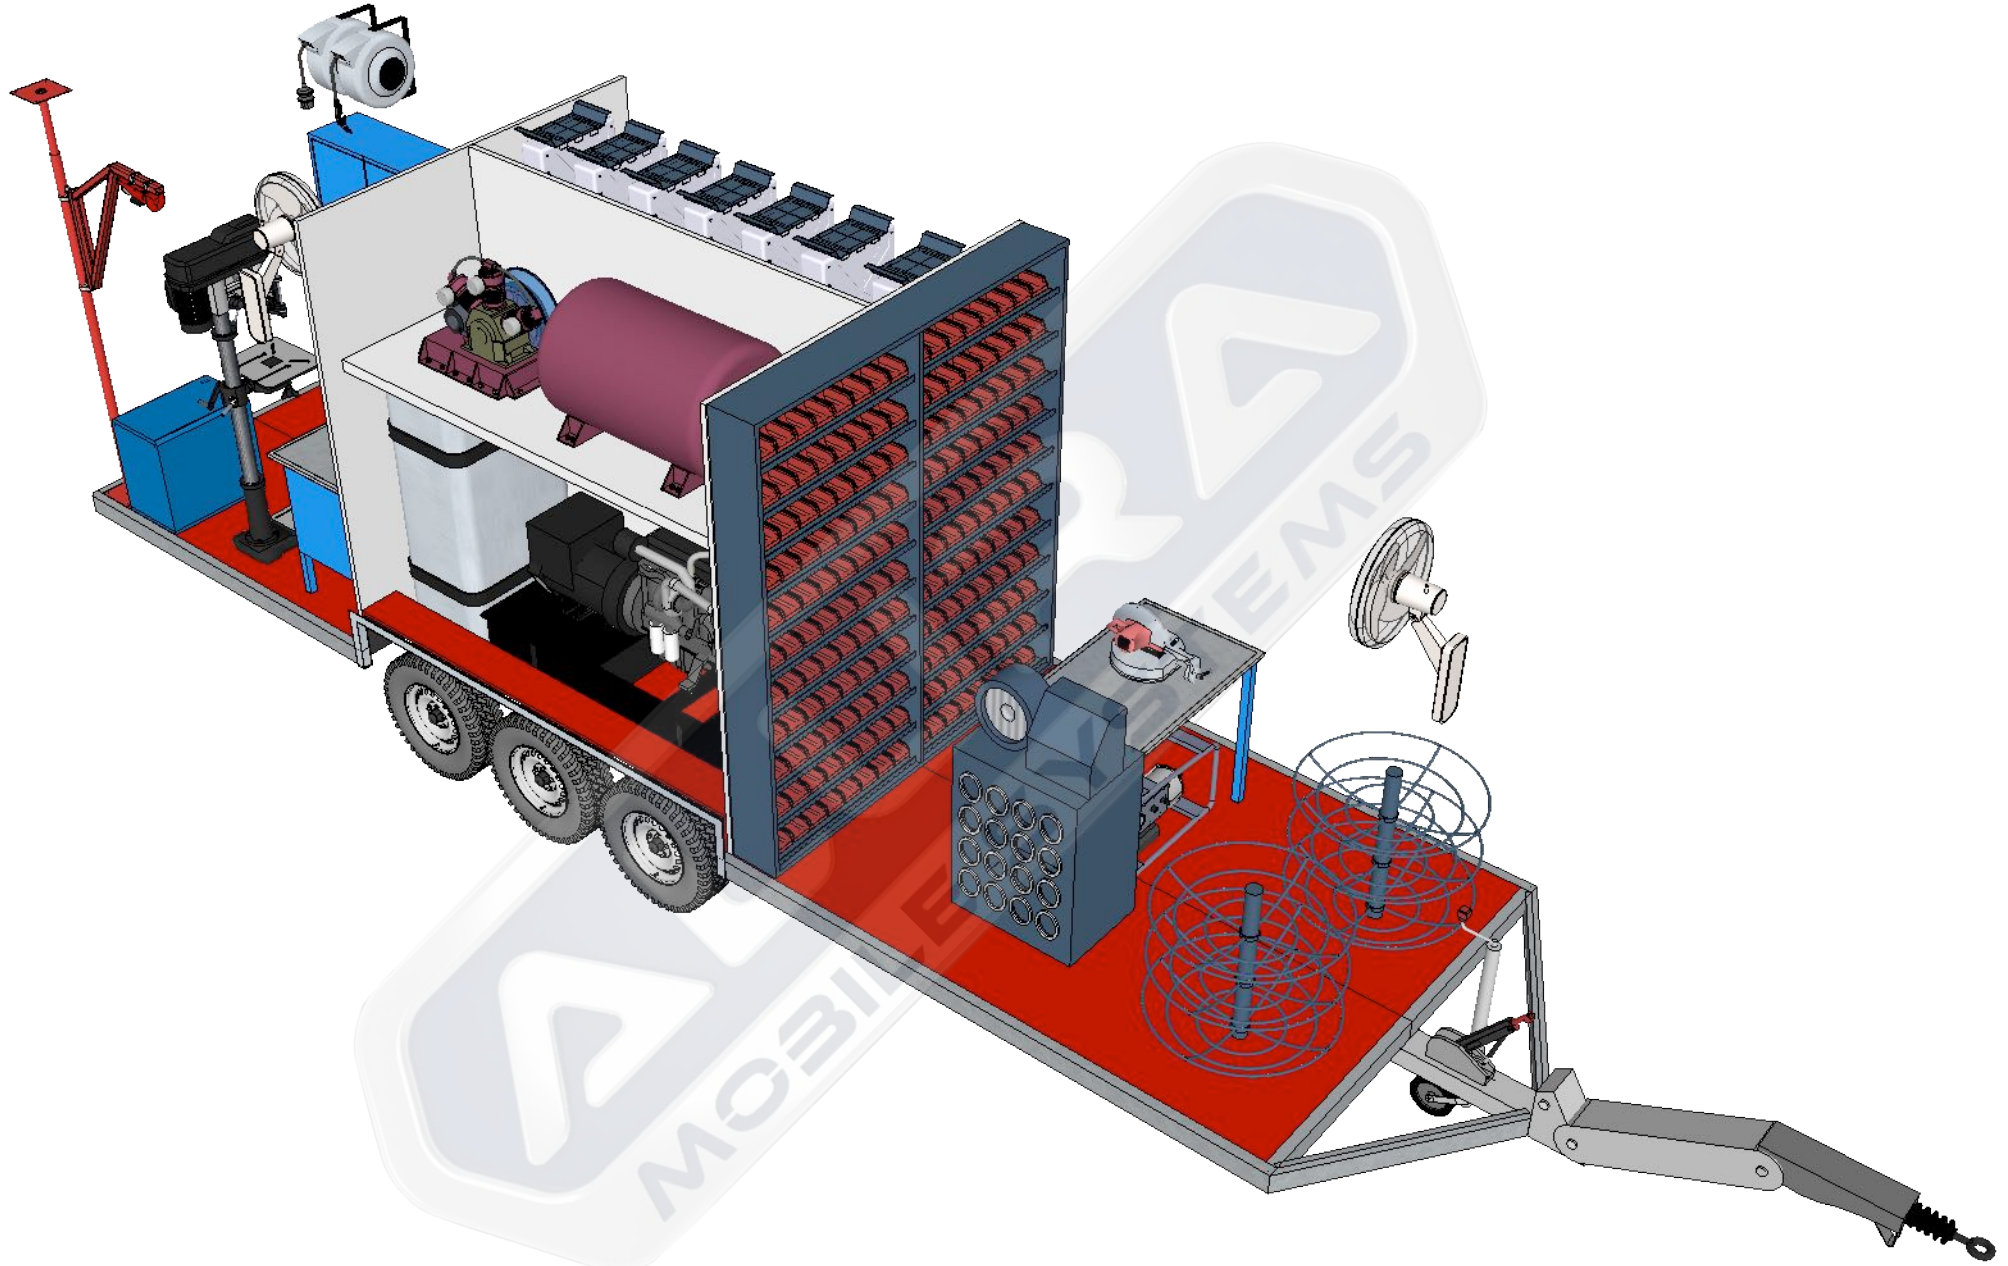

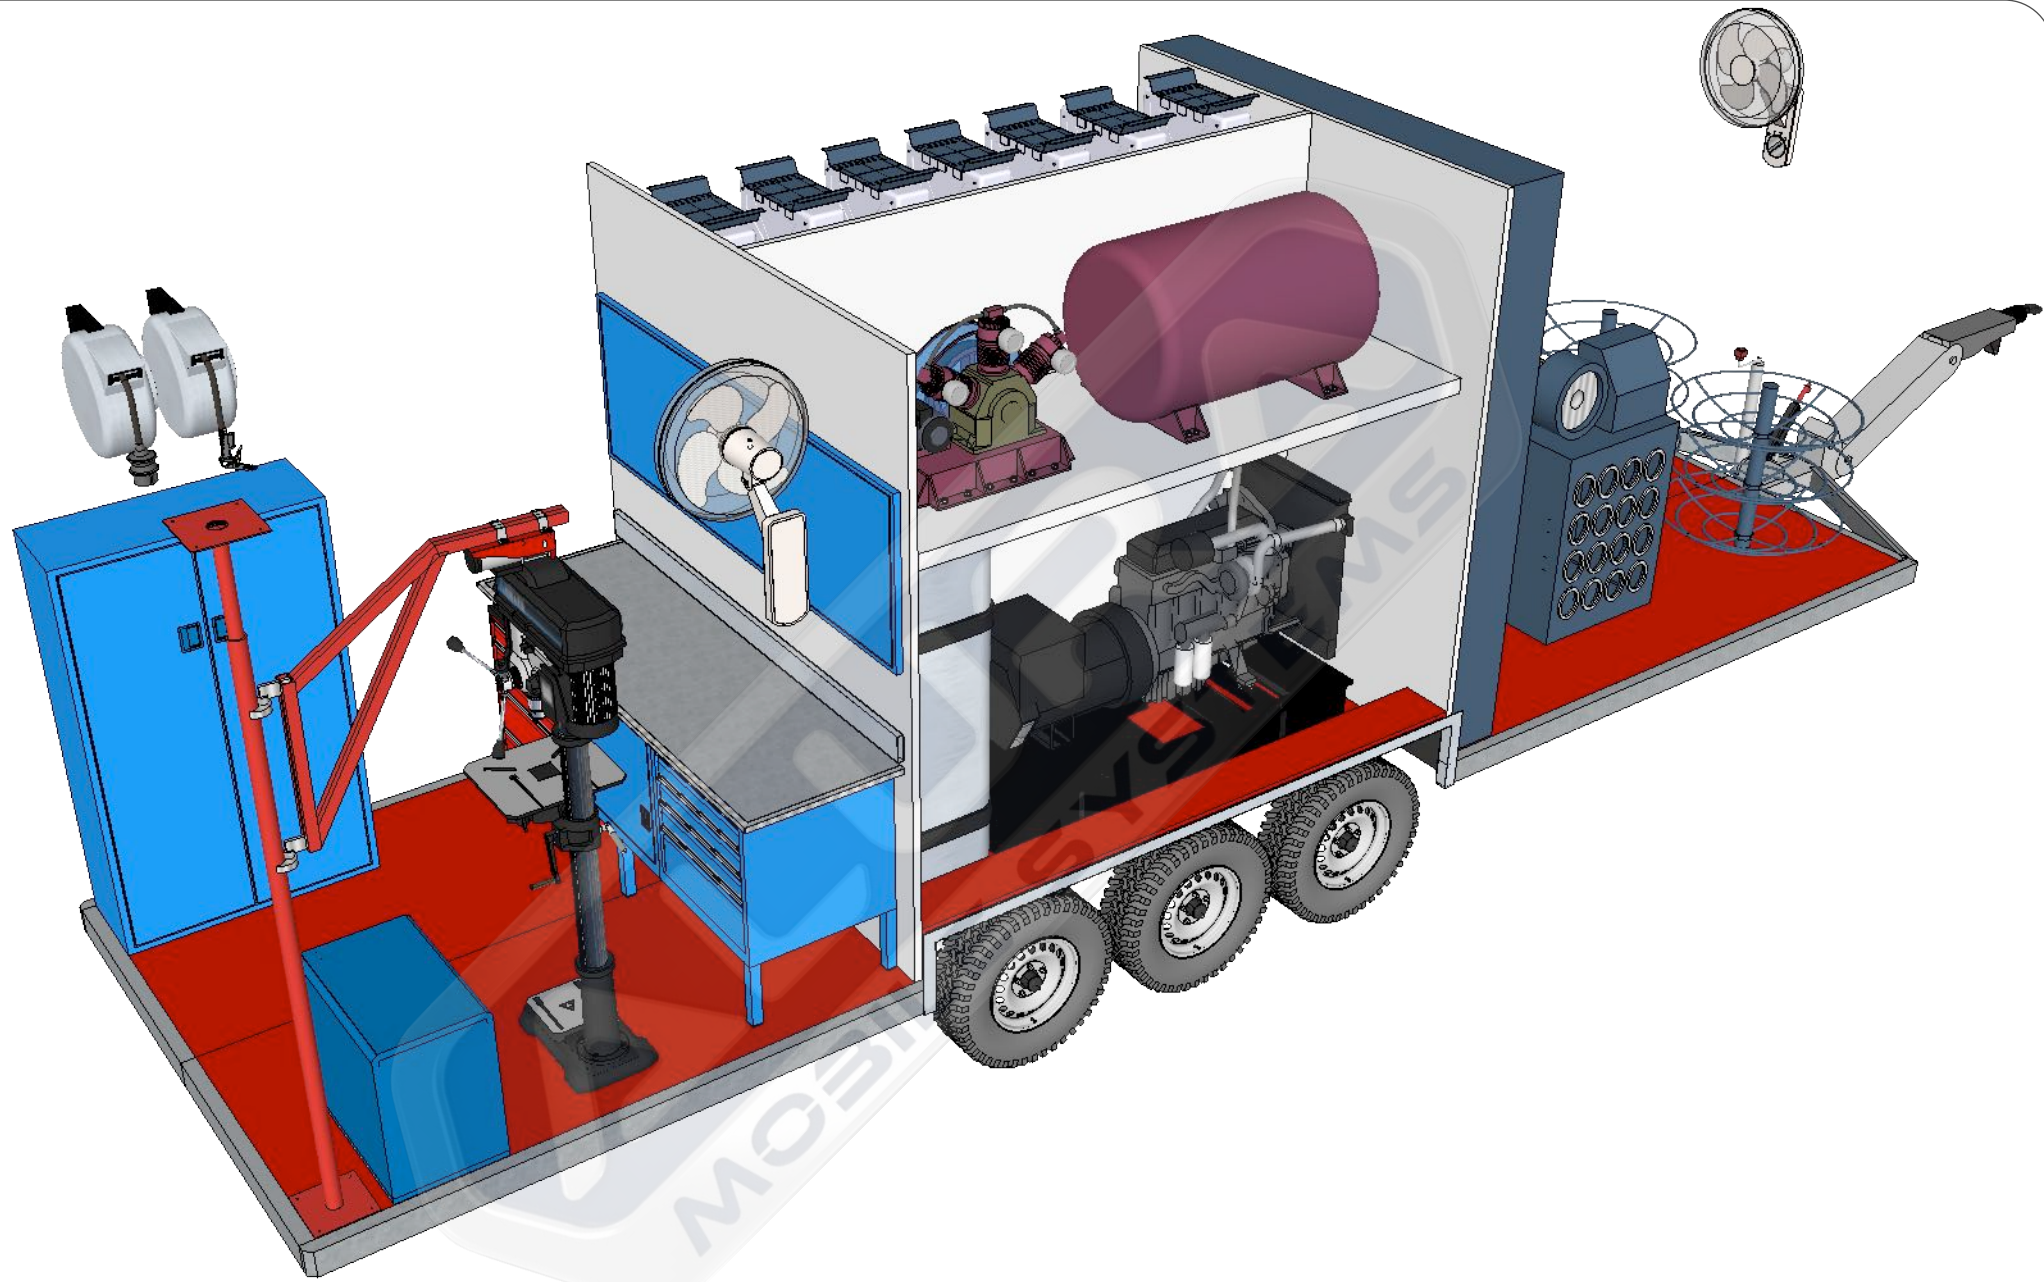


No	Equipment	Explanation	Producer	Orjin	Piece
1	Body Work Trailer		Alura	Turkey	1
		L / H / W: 7,500x2,600x2,115 mm Multi-wing tri-axle towbar trailer. Mechanical handbrake, torsion axles. Side LED trailer lighting system. Trailer chassis made of ST37 steel. Towing hitch height is adjustable.	6 Pcs. TT 7.50 - 16 C PA30 Tires. 80 Km/H Max. speed stickers will be on the trailer. Total weight: 4,500 kg Industrial coating chassis.		
2	Aluminum Shutters		Alura	Turkey	4
		Manuel Working Locking Systems Size : 1250 x 2300 mm 2 pcs. 2000 x 2300 mm 1 pcs.			
3	Generator Diesel		Power	Turkey	1
		Standby/Prime Power: 22 kVa / 23 kVa Standard Voltage: 400/230 V / 3 Phase Engine Bran: Perkins Engine Model: 1103A-33TG1 Alternator: Sincron RPM: 1500 rpm.	Frequency: 50 Hz. Water Cooling		
4	Pistone Compressor		Aykom	Turkey	1
		Chassis Piston Air Compressor Engine Power: 5.5 hp Air Intake: 630 lt/min Revolution : 950 rpm Pressure : 12 bar Working Power : 380 V			
5	Air Tank		Alura	Turkey	1
		Capacity : 300 lt. Working Pressure: 15 bar. Test Pressure: 15 Bar. Sheet Thickness: 4 mm. Compressor Connection : 1" Air Outlet : 1/2"			
6	Work Bench		Alura	Turkey	1
		Work Bench Width: 1.800 mm Depth: 700 mm Height: 2.000 mm Number of Drawers: 10 Drawer Carrying Capacity: 60 kg.	Shelf Carrying Cap .: 80 kg. Socket 2 Pieces 25 mm MDF + Pvc on worktops Electrostatic powder paint Suspension boards modular		

No	Equipment	Explanation	Producer	Orjin	Piece
7	Metal Cabinet		Alura	Turkey	1
		WxDxH: 1.000 x 450 x 2.000 mm Body and carriers 0.80 - 1.2 mm It is long-lasting and durable. The covers are double wing reinforced. Number of Shelves: 7 Pieces Shelf Carrying Cap .: 80 kg.	Variable drawer groups		
8	Metal Cabinet		Alura	Turkey	2
		Metal Cabinet Width: 1.000 mm Depth: 450 mm Height: 2000 mm Number of Shelves: 7 Pieces Shelf Carrying Cap .: 80 kg.	Variable drawer groups Body and carriers 0.80 - 1.2 mm sheet metal It is long-lasting and durable. The covers are double wing reinforced."		
9	Oil Pumps		Raasm	Italy	4
		Pneumatic pumps for oil Flow rate: 18 l / min Air working pressure: 6/8 bar Average air consumption: 230 l / min Noise level: 81 dB Oil viscosity: 80 SAE			
10	Hose Reels		Raasm	Italy	4
		Pressure: 150 bar Length: 25 mt Compatible fluids: Oils and Similar Material: Painted Steel Inlet-Outlet : G 1/2 ""f - G 1/2 ""m Pressure - Size: 1/2 "" - 160 bar			
11	Guns for dispensing		Raasm	Italy	4
		Flu: Technopolymer Digital meter: Yes Inlet swivel joint: G 1/2 f Filter: Yes Level locking button: Yes			
12	Oil Tank		Alura	Turkey	4
		Capacity : 250 Ltr Made of Aluminum Level Indicator Filling tap Pump stabilizer 1" Discharging valve			

No	Equipment	Explanation	Producer	Orjin	Piece
11	Antifreeze Poup		Raasm	Italy	1
		Pneumatic pumps for Antifreeze Flow rate: 30 l / min Air inlet - Fluid Out : G 1/4 - G 1/2 Air working pressure: 6/8 bar Average air consumption: 370 l / min	Noise level: 81 dB Weight : 7,4 kg		
12	Antifreeze Hose Reels		Raasm	Italy	1
		Pressure: 150 bar Hose Length: 15 mt Compatible fluids: Antifreeze Material: Painted Steel Inlet-Outlet : G 1/2 "f - G 1/2 "m Operating temperature: -40 / +100	Pressure - Size: 1/2 " - 160 bar		
13	Guns for dispensing		Raasm	Italy	1
		Flu: Technopolymer Digital meter: Yes Inlet swivel joint: G 1/2 f Filter: Yes Level locking button: Yes			
14	Antifreeze Tank		Alura	Turkey	1
		Capacity : 250 Ltr Made of Aluminum Level Indicator Filling tap Pump stabilizer 1" Discharging valve			
15	Waste Oil / Diagram Pump		Raasm	Italy	1
		Diaphragm Pumps Flow rate: 70 l / min Max pressure: 8 bar. Max cicles for minute: 400 cpm. Max working temperature: 100 ° C Noise level: 70 dB	Air working pressure: 2/6 Bar Membranes: EPDM		
16	Waste Oil / Hose Reel		Raasm	Italy	1
		Pressure: 20 bar Length: 25 mt Compatible fluids: Oils and Similar Material: Painted Steel Inlet-Outlet : G 1/2 ""f - G 1/2 ""m Pressure - Size: 1/2 "" - 160 bar			

No	Equipment	Explanation	Producer	Orjin	Piece
17	Waste Oil Tank		Alura	Turkey	1
		Capacity : 500 Ltr Made of Aluminum Level Indicator Filling tap Pump stabilizer 1" Discharging valve			
18	Cold Washing Machine		Alura	Turkey	1
		Pressure: 200 bar Flow rate: 900 lt/hour Engine Power: 7.5 hp Voltage - Phase 380V-3 50 Hz Weight: 74 Spray gun			
19	Washing Hose Reels		Alura	Turkey	1
		Pressure: 200 bar. Hose Length: 25 mt. Compatible fluids: Water Swivel joint: Stainless Metal Characteristic: Fixed Material: Painted steel			
20	Water Pump		Karcher	Germany	1
		Maximum Motor power : 1000 W Maximum Water Flow: 4500 l/hour Maximum pressure: 50/5 m/bar Working pattern: 1.9 - 3 bar Maximum suction : 8 m Connection type : G1	Power Cable H05RN-F : 1 m Weight without accessories : 14.7 kg		
21	Water Hose Reel		Karcher	Germany	1
		Pressure: 20 bar. Compatible fluids: Water Swivel joint: Stainless Metal Seals: Polyurethane Characteristic: Fixed Inlet: G 1/2 " (f)	Outlet: G 1/2 "(g) Operating temperature -40 C / +80 C Size: 1/2 " Pressure: 10 bar Length: 20 mt		
22	Waste Oil Tank		Alura	Turkey	1
		Capacity : 500 Ltr Made of Aluminum Level Indicator Filling tap Pump stabilizer 1" Discharging valve			

No	Equipment	Explanation	Producer	Orjin	Piece
23	Cable Roller		Mavel	Italy	1
		20 Mt 5*1.5 Mm Three Phase : 220 Volt Cable Thickness: 5*1.5 Mm2 Cable Length: 20 Mt Cable Type : H07RN-F Power : 1000-3000 W	Auto Rewind Plastic outer cover steel swivel wall bracket Weight: 9 Kg Dimensions: 42x39x23 Cm		
24	Air Hose Roller		Mavel	Italy	1
		Hose Diameter: 10x15 Mm Hose Length: 20 Mt Working Pressure: 15 Bar Inlet and Outlet Dim.: 3/8" F - 3/8" M Automatic Rewind Plastic outer casing	Steel rotating wall brake Size: 50x43.5x23.5 cm Weight: 8.3 Kg		
25	Air Regulator		Osaka	Japan	1
		Air Inlet : 1/2" Filter : 20u Working Pressure: 05-9.9 atu Operating Temperature: 5-60°C Water Capacity: 80 ml Air Permeability: 2200 lt/min			
26	Chain Hoist		Max Extra	Kore	1
		0,5 Tons 3 Meter Chain			
27	Lighting		EAT	Turkey	6
		Body : Polycarbonate RAL 9003 body , Metal lock clip Diffuser: Polycarbonate opal cover Light Source: Mid Power LED Power: 28 W / 38 W / 55 W Input Voltage: 220-240V - IP 65			
28	Outdoor Lighting		CSR	Turkey	6
		Operating Voltage / Current: DC 12/15V 1.4A Driving Type: Linear current and voltage controlled driver Light Source: 3W 12pcs power LED LENS Feature: 25° collimator LENS	White:5000-7000K Physical Properties : Polycarbonate plastic black aluminum profile		

No	Equipment	Explanation	Producer	Orjin	Piece
29	Control panel of all equipment.	Alura	Turkey	1	
		Control of all machines. Lighting control. Compressor Pressure gauge.			
30	MIG Welding Machine	Telwin	Italy	1	
		Mains Voltage: 400 V. Mains Fuse: 16 A. Power Draw: 3 - 5.5 kW. Idle Working Voltage: 95 V. Current Adjust. Range: 10 - 240 A. Rated Current: 200 A - %20 A.	Electrode Diameter: 0.6 - 1.2 mm. Protection Class: IP 23 Dimensions: 795 x 375 x 730 mm Weight: 32 kg.		
31	Pro Series Workshop Trolley	İzeltaş	Turkey	1	
		206 Pieces hand tools. SIZE: 470x670x1007 mm. Made of sheet metal. Electrostatic paint. 8 drawers, lockable.	Hand tools fixed in sponge channels.		
32	Combination Wrench	İzeltaş	Turkey	2	
		Long Pattern Chrom vanadium Chrom plated TS3794 - TS ISO 7738 FORM A DIN 3113	5-6-7-8-9-10-11-12-13-14-15-16-17-18-19-20-21-22-23-24-25-26-27-28-29-30-32-33-34-36-38-41-46-50		
33	Hydraulic Hose Crimping Machine	Finn-Power	Finland	1	
		Max crimping dia: 87 mm Max crimping dia: 3.42 Max crimping force: 200 ton Hose size ID: 2" Die set series: 32 Motor Power: 1.5/2.0 kW/HP	Oil tank volume: 27 l DIMENSIONS: 675x520x620 mm WEIGHT: 190 kg.		
34	Accessory	Finn-Power	Finland	1	
		Metal jaw fixing bench. With standard dies. 10-12-14-16-19-22-26-30-34-39-45- 51-57-63-69-74-78 Jaw Replacement Device.			

No	Equipment	Explanation	Producer	Orjin	Piece
35	Hose Cutting Machine		Finn-Power	Finland	1
		Max. hose size: 2 / 1 1/4 inch Diameter (blade) ext.: 300x3 mm. Diameter (blade) internal : 30 mm. Max. hose OD: 70 mm. Exhaust outlet OD: 60 mm Motor Power: 3.0/2.2 kW.	Motor Power: 4.0/2.9 Hp. Weight: 42 kg.		
36	Hose Stripping Machine		Finn-Power	Finland	1
		Hose capacity, ext. : 3/16-2 inch Hose capacity, internal: 1/2-2 inch Speed of tool rotation: 100 r./min Expanding length: 85 mm. Motor Power: 0.75 / 1.0 kW/HP	Dimensions: 821x366x390 mm. Weight: 34 kg.		
37	Tap and Die Set Metric		Mannesma	Germany	1
		45 Piece guide die set, 20 guides 20 die Tap and die dimensions: M6 x 0.75 - M6 x 1.0 - M8 x 1.0 - M8 x 1.25 - M10 x 1.25 - M10 x 1.5 -	M12 x 1.5 - M12 x 1.75 - M14 x 1.5 - M14 x 2.0 - M18 x 1.5 - M18 x 2.5 - M20 x 1.5 - M20 x 2.5 - M22 x 1.5 - M22 x 2.5 - M24 x 1.5 - M24 x 3.0		
38	Tap and Die Set SAE		PRO	Germany	1
		10 Unc Tap & Die Sizes: 4-40, 6-32, 8-32, 10-24, 12-24, 1/4"-20, 5/16"-18, 3/8"-16, 7/16"-14, 1/2"-13 6 Unf Tap & Die Sizes: 10-32, 1/4"- 28, 5/16"-24, 3/8"-24,	7/16"-20, 1/2"-20 1 Npt Tap & Die Size: 1/8"-27 1 Tap Wrench: 1/16" - 1/2" 1 T-type Tap Wrench :1/16" - 1/4" 1 Die Wrench: 1" O/d 1 Screwdriver / 1 Screw Pitch Gauge		
39	Industrial Wall Fan		Raks	Turkey	2
		Working Power: 130 Watt Propeller Diameter: 50 cm Aluminum Propeller 3 Speed Stage Automatic Oscillation Mechanism Adjustable Height	Overheating Protection Motor		