



2438 mm

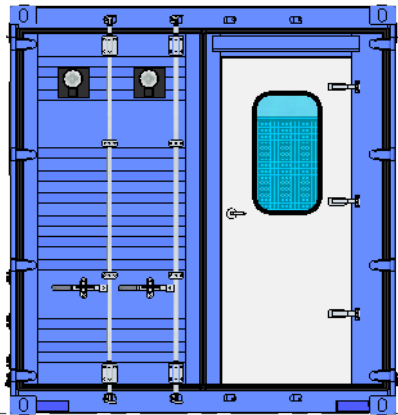

6058 mm

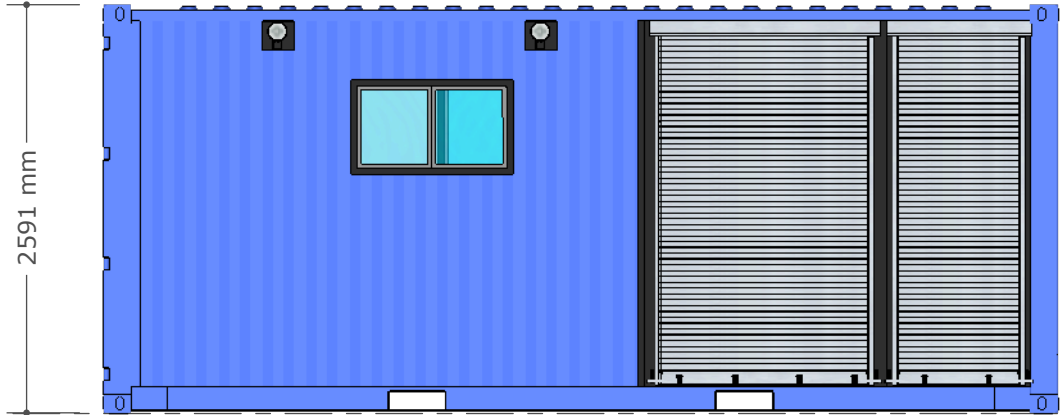

2591 mm



Project / Model

21.034
20' MWS 2.1 Container





Explanation

20 ft ISO Container

Info

Date : 07.09.2021
 Rev. : 00
 Per. : Metin ALCAR
 Tel : 0544 242 04 91
 Mail : sales@aluratrailer.com

A 01

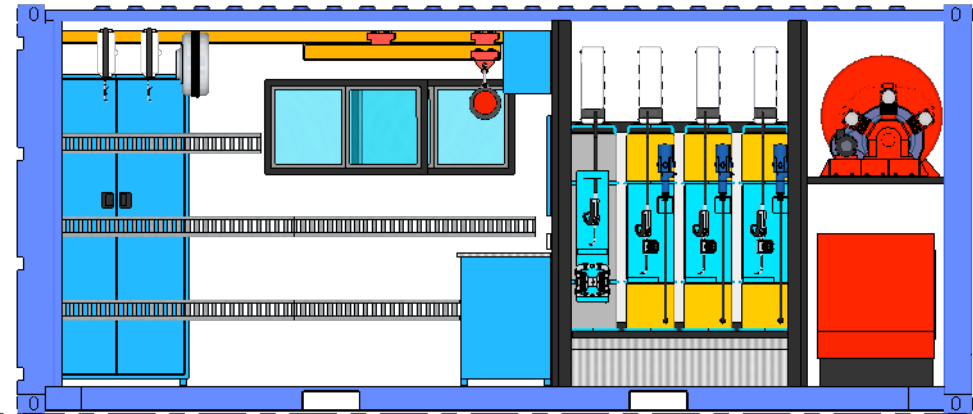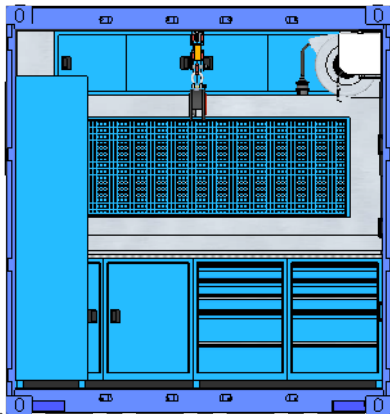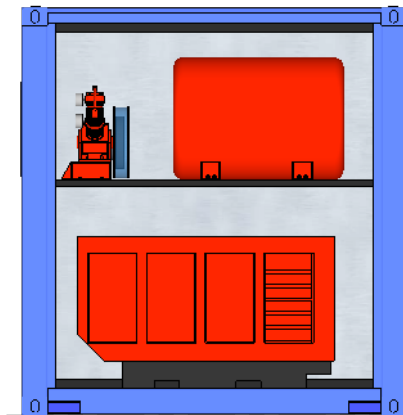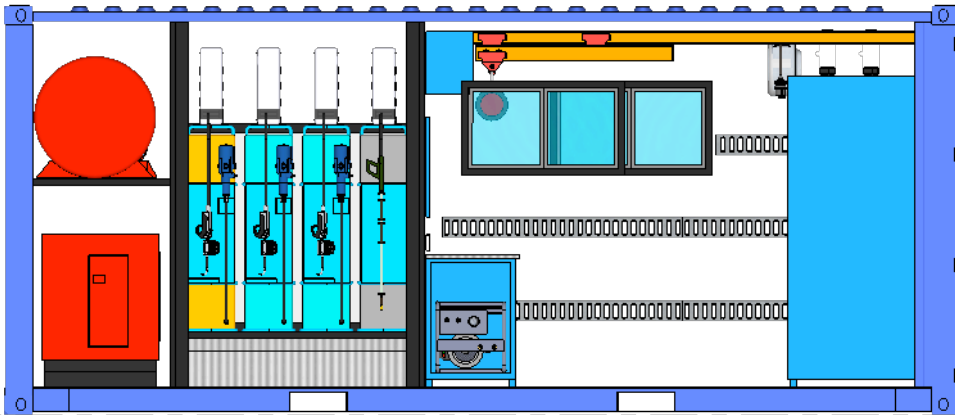

Project / Model

21.034
20' MWS 2.1 Container

Explanation

20 ft ISO Container

Info

Date : 07.09.2021
 Rev. : 00
 Per. : Metin ALCAR
 Tel : 0544 242 04 91
 Mail : sales@aluratrailer.com

A 02

Air Compressor
Air Tank


Oil Tank / Reel
X4

Waste Oil
Reel/Pump
Tank X2

Crane

Air Reel
Electric Reel

Water Reel

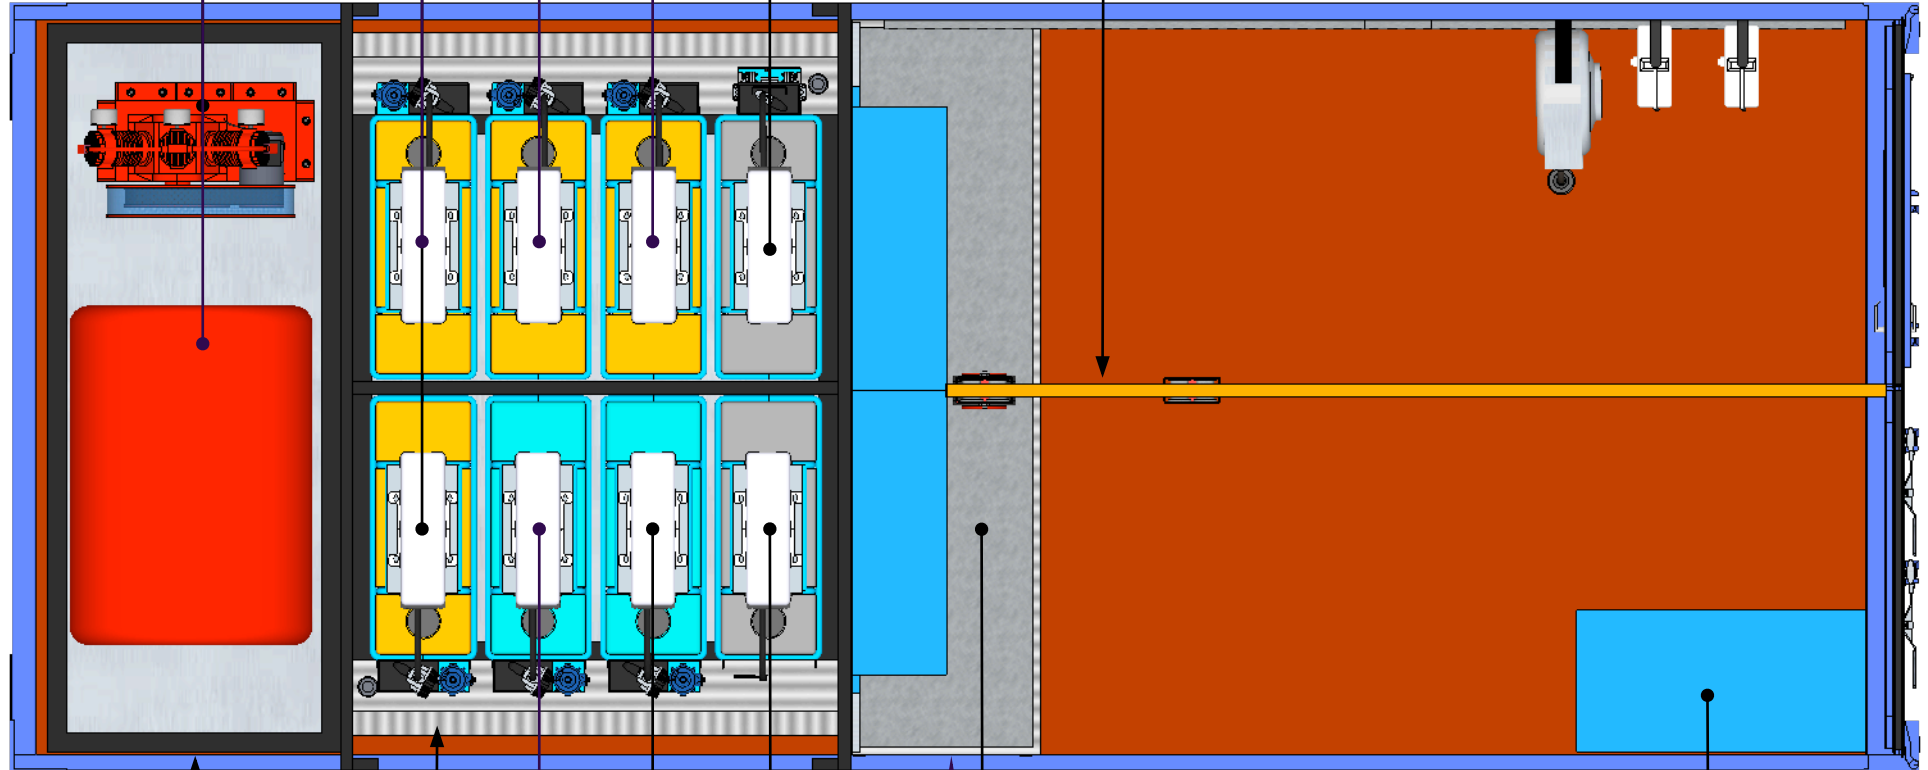

Water Tank

Coolant Tank / Reel
X2

Generator

Work Bench

Washing
Machine/Reel

Metal Cabinet



Project / Model

21.034

20' MWS 2.1 Container

Explanation

20 ft ISO Container

Info

Date : 07.09.2021


Rev. : 00

Per. : Metin ALCAR

Tel : 0544 242 04 91

Mail : sales@aluratrailer.com

A 03

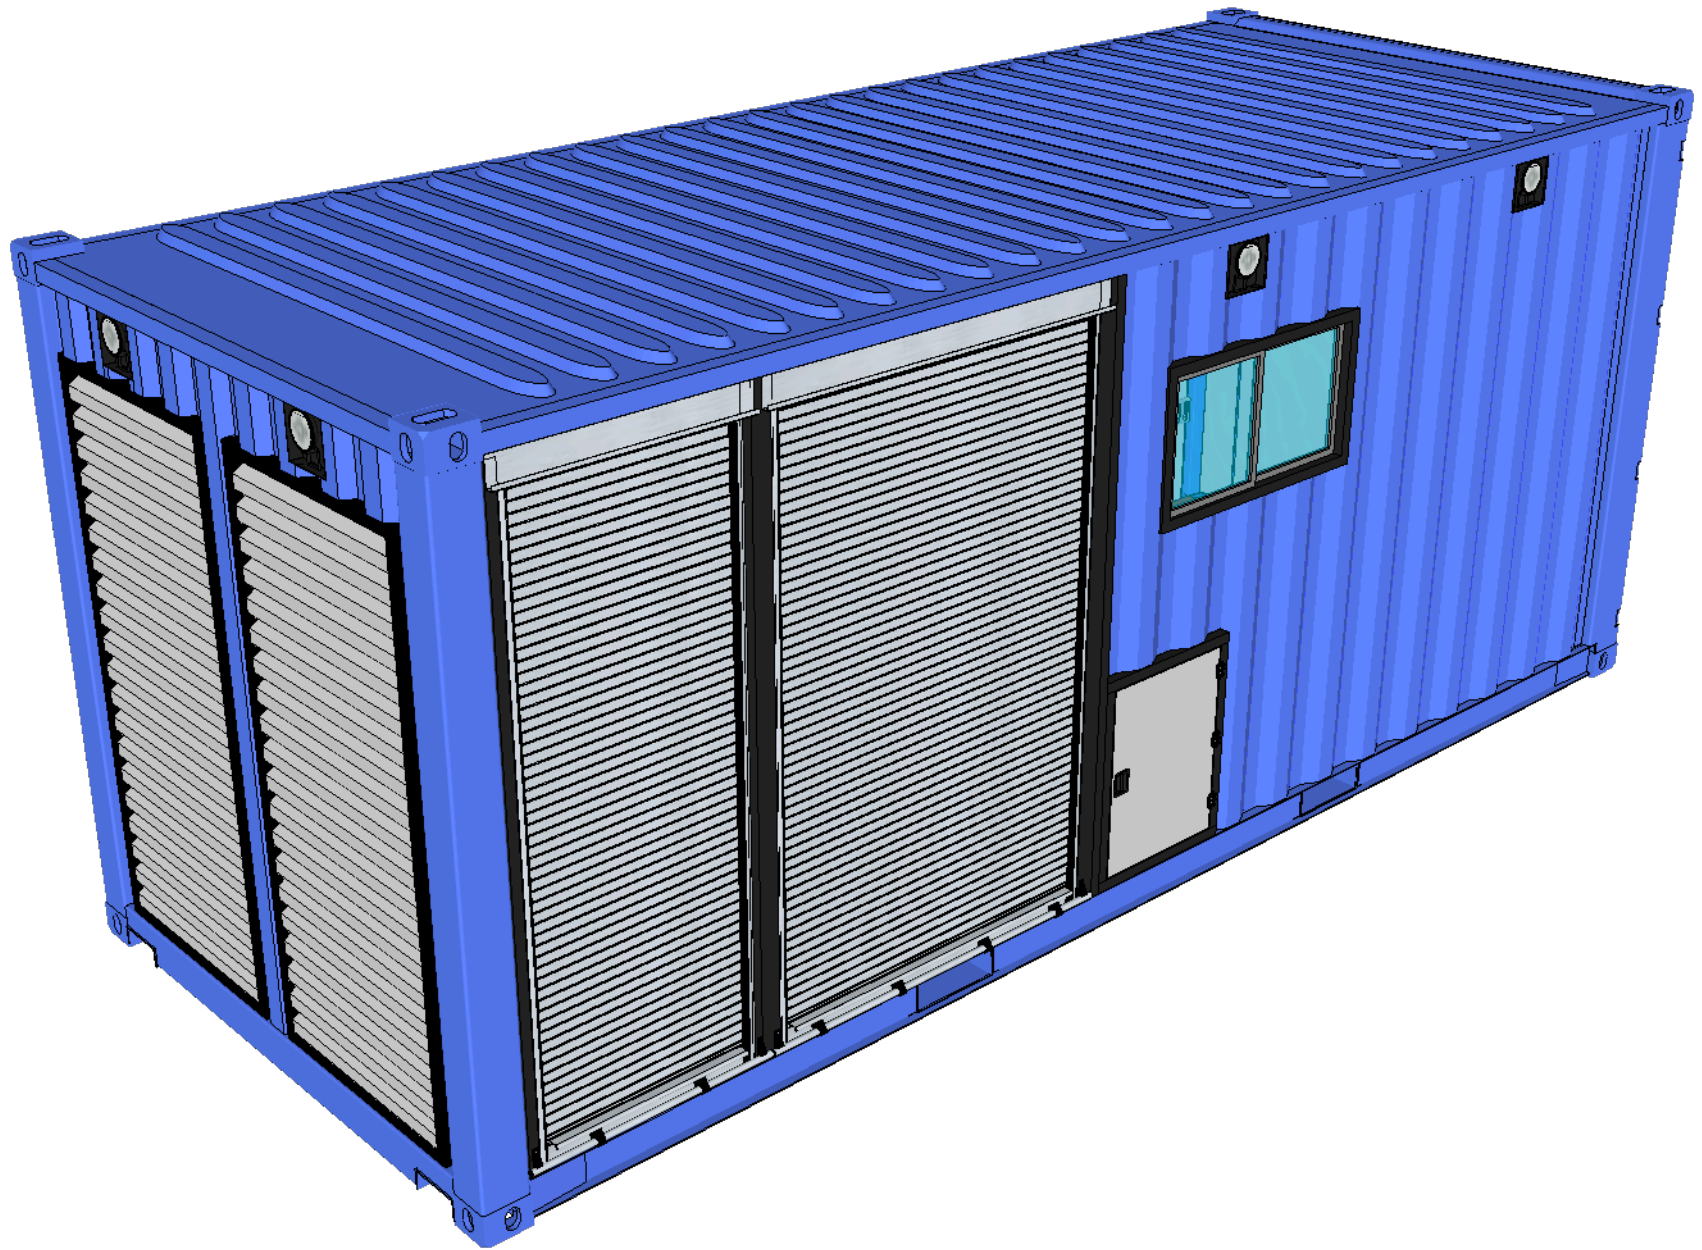

Project / Model

21.034
20' MWS 2.1 Container

Explanation

20 ft ISO Container

Info

Date : 07.09.2021
Rev. : 00
Per. : Metin ALCAR
Tel : 0544 242 04 91
Mail : sales@aluratrailer.com

A 04



Project / Model

21.034
20' MWS 2.1 Container


Explanation

20 ft ISO Container

Info

Date : 07.09.2021
Rev. : 00
Per. : Metin ALCAR
Tel : 0544 242 04 91
Mail : sales@aluratrailer.com

A 05

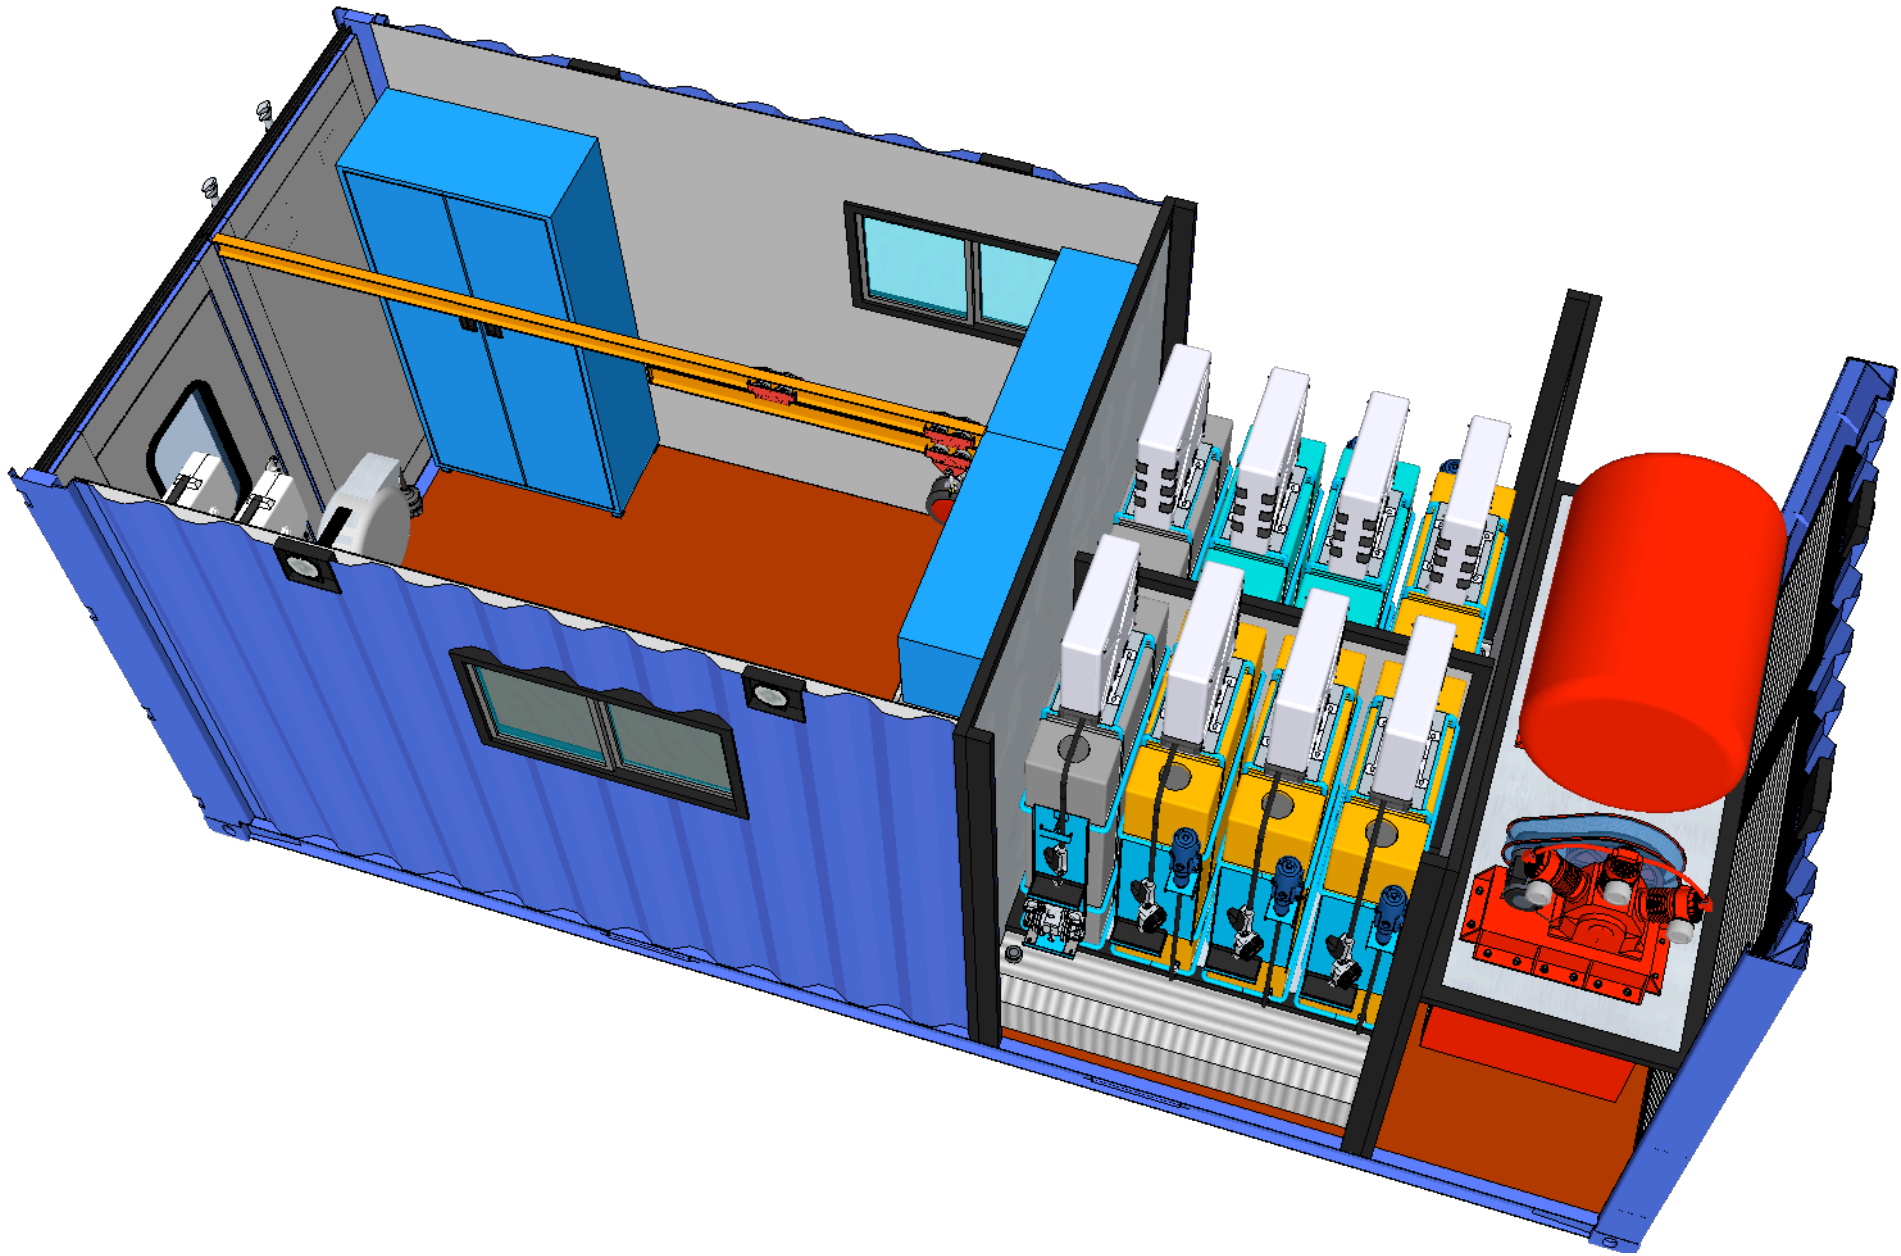

Project / Model

21.034
20' MWS 2.1 Container


Explanation

20 ft ISO Container

Info

Date : 07.09.2021
 Rev. : 00
 Per. : Metin ALCAR
 Tel : 0544 242 04 91
 Mail : sales@aluratrailer.com

A 06

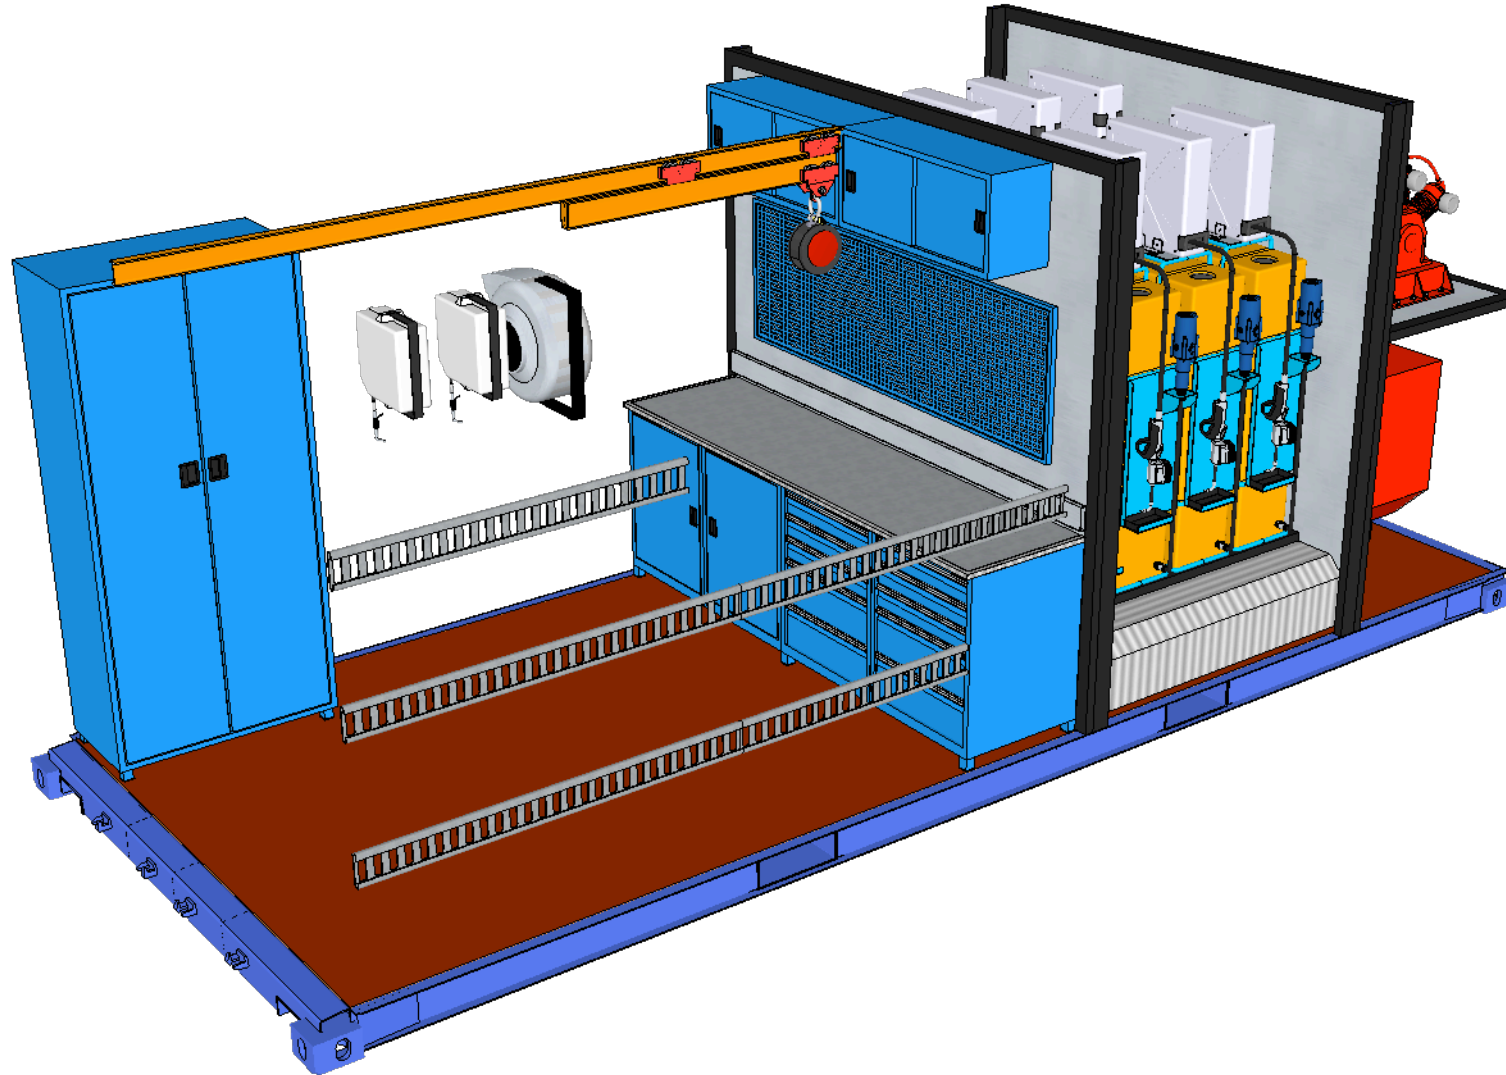

Project / Model

21.034
20' MWS 2.1 Container


Explanation

20 ft ISO Container

Info

Date : 07.09.2021
 Rev. : 00
 Per. : Metin ALCAR
 Tel : 0544 242 04 91
 Mail : sales@aluratrailer.com

A 07

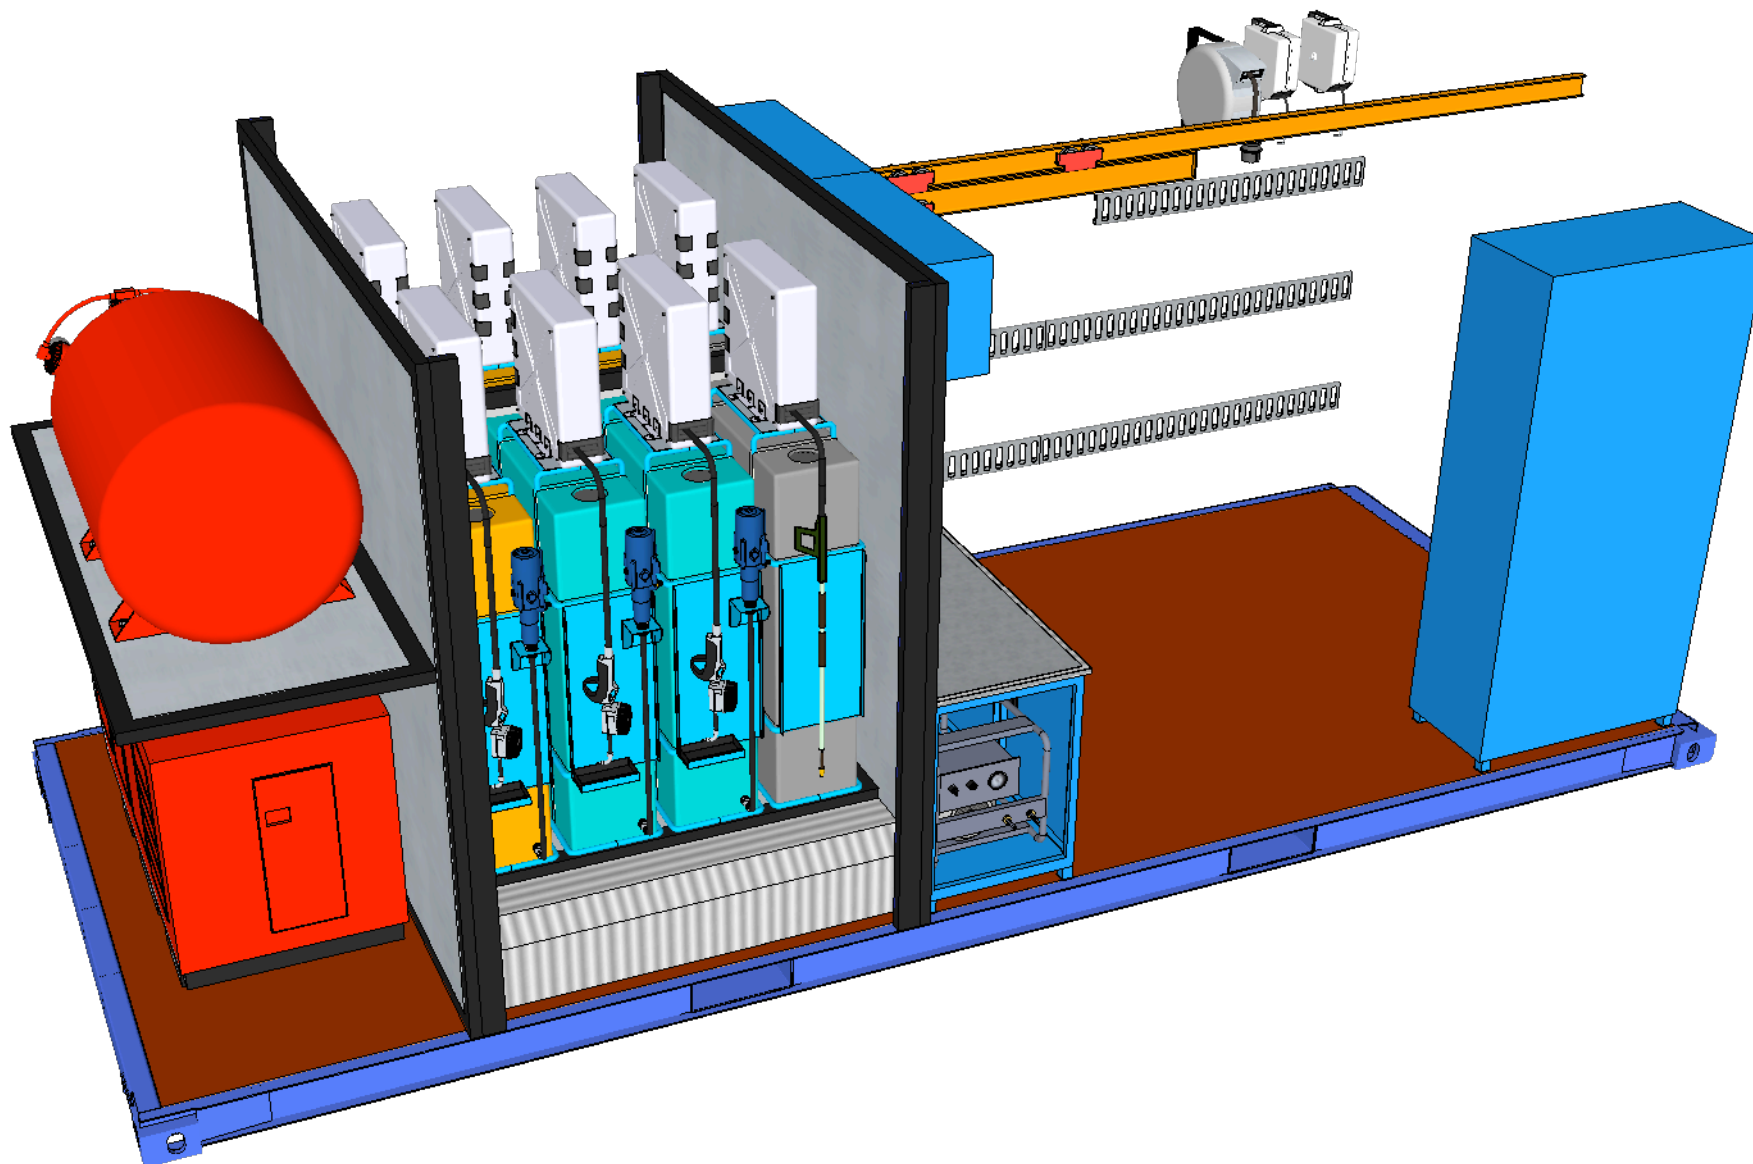

Project / Model

21.034
20' MWS 2.1 Container

Explanation





20 ft ISO Container






Info



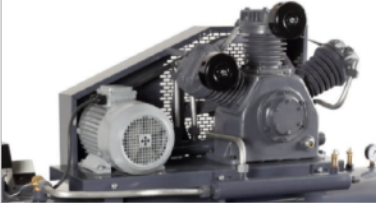



Date : 07.09.2021
 Rev. : 00
 Per. : Metin ALCAR
 Tel : 0544 242 04 91
 Mail : sales@aluratrailer.com




A 08









Equipment	Explanation	Brand / Orjin	Quantity	
	Bodywork 20' Dry / Standard Container External Dimensions Length: 6.058 mm Width: 2.432 mm Height: 2.591 mm Internal Dimensions Length: 5.895 mm Width: 2.350 mm Height: 2.392 mm Area : 33.2 m3 / 14 m2 Tare: 2.250 kg. Insulation: Polyurethane 30 mm Inner coating: Alukobond 4 mm Floor: Polywood 18 mm Floor Covering: PVC 2,5 mm	ALURA / Turkey	1	pcs
	Aluminum Shutters Manuel Working Locking Systems Size : 1800 x 2000 mm	CELIKSAN / Turkey	4	pcs
	Work Bench Width: 2.250 mm Depth: 700 mm Height: 2.000 mm Number of Drawers: 10 Drawer Carrying Capacity: 60 kg. Shelf Carrying Cap .: 80 kg. Socket 2 Pieces 25 mm MDF + Pvc on worktops Telescopic rails with 100% opening in drawers Central locking system in drawers Electrostatic powder paint Suspension boards modular Standard 2 220V sockets in electrically connected workbenches	ALURA / Turkey	1	pcs
	Metal Cabinet Width: 1.000 mm Depth: 450 mm Height: 2000 mm Number of Shelves: 7 Pieces Shelf Carrying Cap .: 80 kg. Variable drawer groups Body and carriers 0.80 - 1.2 mm sheet metal It is long-lasting and durable. The covers are double wing reinforced.	ALURA / Turkey	1	pcs

Equipment	Explanation	Brand / Orjin	Quantity	
	Diesel Welding / Generator Welding current: 20-350 A Open circuit voltage 66 V Duty cycle: 350 A 35%, 300 A 60%, 250 A 100% Three-phase: 10 kVA / 400 V / 14.4 A Single phase: 5 kVA /230 V / 21.7 A Single-phase: 2.5 kVA / 110 V / 22.7 A Single phase: 5 kVA /48 V / 104 A Frequency: 50Hz Model: KOHLER KD 477-2 Air Cooled Output Power: 14.9 kW (20.3 HP) Revolution Speed: 3000 rpm Engine Displacement / Number of Cylinders: 954 cm ³ / 2 Fuel Consumption (60%): 2.5 lt/h Fuel Capacity: 38 lt Working Time (60%): 15.2 hours Protection Class: IP 23 Dimensions (LxDxH): 1230x690x925 mm Weight: 345 Kg Noise Level: 95 dB	MOSA / Italy	1	pcs
	Auxiliary Fuel Tank : Plastik Fuel Tank 45 lt 80 X 35 X 20 Cm	CAN SB / Italy	1	pcs
	Pistone Compressor Electric Motor : 380 W Capacity: 760 Lt/min Pressure : 15 Bar Cylinder: 3 pcs Power: 7,5 Hp	YIGITSAN / Turkey	1	pcs
	300 lt Air Tank	AYKOM / Turkey	1	pcs

Equipment	Explanation	Brand / Orjin	Quantity
	Lubrication Oil Set Pneumatic pumps for oil Flow rate: 20 l / min Ratio: 3: 1 Compatible fluids: Oils Suction tube upper body: Aluminum Suction tube: Carbon Steel Air inlet connection: G 1/4 Fluid outlet connection: G 1/2 Air working pressure: 6/8 bar Average air consumption: 230 l / min Noise level: 81 dB Oil viscosity: 80 SAE Weight: 5 kg "		
	Drum Hose Reels Pressure: 150 bar Compatible fluids: Oils and Similar Swivel joint: Zinc Plated Steel Seals: Polyurethane Material: Painted Steel Couplings: Zinc Plated Steel Inlet: G 1/2 "f Outlet: G 1/2 "m Reel flow path: Internal drum width: 110 m "	RAASM / Italy	4 pcs
	Single row steel wire braid with high tensile strength High resistance to oil and wear Operating temperature -40 degrees to +100 degrees Size: 1/2 " Pressure: 160 bar Length: 15 mt "		
	Guns for dispensing Flu: Technopolymer Terminal: Flexible Drip-catcher: Semiautomatic ø 16 mm Digital meter: Yes Inlet swivel joint: G 1/2 f Filter: Yes Level locking button: Yes "		
	Oil Tank LDPE Plastic 8 mm / 250 Lt.	ALURA / Turkey	4 pcs






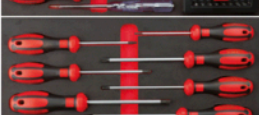












Equipment	Explanation	Brand / Orjin	Quantity	
	Coolant Set Pneumatic pumps for oil Flow rate: 20 l / min Ratio: 3: 1 Compatible fluids: Antifreeze Suction tube upper body: Aluminum Suction tube: Carbon Steel Air inlet connection: G 1/4 Fluid outlet connection: G 1/2 Air working pressure: 6/8 bar Average air consumption: 230 l / min Noise level: 81 dB Oil viscosity: 80 SAE Weight: 5 kg			
	Drum Hose Reels Pressure: 150 bar Compatible fluids: Antifreeze Swivel joint: Zinc Plated Steel Seals: Polyurethane Material: Painted Steel Couplings: Zinc Plated Steel Inlet: G 1/2 "f Outlet: G 1/2 "m Reel flow path: 15 mt Internal drum width: 110 m	RAASM / Italy	2	pcs
	Single row steel wire braid with high tensile strength High resistance to oil and wear Operating temperature -40 degrees to +100 degrees Size: 1/2 " Pressure: 160 bar Length: 15 mt			
	Guns for dispensing Flu: Technopolymer Terminal: Flexible Drip-catcher: Semiautomatic ø 16 mm Digital meter: Yes Inlet swivel joint: G 1/2 f Filter: Yes Level locking button: Yes			
	Collant Tank LDPE Plastic Prisma Tank 8 mm / 250 Lt.	ALURA / Turkey	2	pcs
	Mobile Lubrication Grease Set Grease supply system For 10/15-kg-container ø 240- 290 mm Pneumatic grease pump 50:1 Special pump mechanism High pressure hose, 5 mt.	PRESSOL / Germany	1	pcs

Equipment	Explanation	Brand / Orjin	Quantity
	<p>Lubrication Oil Transfer Tank Set Pneumatic pumps for oil Flow rate: 20 l / min Ratio: 1: 1 Compatible fluids: Oils Suction tube upper body: Aluminum Suction tube: Carbon Steel Air inlet connection: G 1/4 Fluid outlet connection: G 1/2 Air working pressure: 6/8 bar Average air consumption: 230 l / min Noise level: 81 dB Oil viscosity: 80 SAE Weight: 5 kg</p> <p>Pump Seat Plate: 3 Sets Pu Single row steel wire braid with high tensile strength High resistance to oil and wear Operating temperature -40 C to +100 C Size: 1/2 " Pressure: 160 bar Length: 6 mt</p>	RAASM / Italy	1
	<p>Waste Oil Systems Set Flow rate: 70 l / min Ratio: 1: 1 Max pressure: 8 bar. Max cycles for minute: 400 cpm. Max suction lift: wet column 7,5 Max working temperature: 100 ° C Noise level: 70 dB Air working pressure: 2/6 Bar Membranes: EPDM Balls: Acatel "</p> <p>Pressure: 150 bar. Compatible fluids: Oils Swivel joint: Zinc plated steel Seals: Polyurethane Characteristic: Fixed Material: Painted steel Inlet: G 1/2 "(f) Outlet: G 1/2 "(f) Reel flow path: Zinc plated steel Internal drum width: 110 mm "</p> <p>Waste oil gravity and suction drainers</p> <p>Single row steel wire braid with high tensile strength High resistance to oil and wear Operating temperature -40C to +100 C Size: 1/2 " Pressure: 160 bar Length: 15 mt</p>	RAASM / Italy	1 pcs
	<p>Waste Oil Tank LDPE Plastic Prisma Tank 8 mm / 250 Lt.</p>	ALURA / Turkey	2 pcs

Equipment	Explanation	Brand / Orjin	Quantity	
	Waste Oil Floor waste oil drainer 50 litre with quick release Connector line.	RAASM / Italy	1	pcs
	Stainless Water Tank Metal Prisma Tank 2 mm / 1.000Lt. Width:1500 mm Height: 300 mm Length: 2.250 mm	ALURA / Turkey	1	pcs
   	Washing Machine COLD Electric Cold Washing Machine Pressure: 250 bar Flow rate: 960 lt / hour Engine Power: 10 hp Voltage - Phase 380V-3 50 Hz Weight: 105 Whasing Gun Pressure: 200 bar. Compatible fluids: Water Swivel joint: Stainless Metal Seals: Polyurethane Characteristic: Fixed Material: Painted steel Inlet: G 3/8 " (f) Outlet: G 3/8 "(f) Reel flow path: Zinc plated steel Internal drum width: 110 mm Single row steel wire braid with high tensile strength High resistance to oil and wear Operating temperature -40 C / +100 C Size: 3/8 " Pressure: 160 bar Length: 25 mt.	ROTTTEST / Turkey	1	set
	Air Reel Length hose: 11 m Length hose con. : 1.5 m Hose diameter: 8 x 12 mm Inlet connection thread: G 1/4" Max working pressure: 10 bar	RAASM / Italy	1	pcs
	Air Reel Set Professional Blow Gun	AIGNEP	1	pcs

Equipment	Explanation	Brand / Orjin	Quantity	
	Water Transfer Set Length hose : 11 mt. Length hose con. : 1,5 mt Hose diameter : 8x12 mt. Inlet connection thread : G 1/4" Max working pressure : 10 bar	RAASM / Italy	1	pcs
	Water Transfer Set Maximum Motor power : 1000 W Maximum Water Flow: 4500 l/hour Maximum pressure: 50/5 m/bar Working pattern: 1.9 - 3 bar Maximum suction : 8 m Maximum leaving water : 35 °C Connection type : G1 Power Cable H05RN-F : 1 m Weight without accessories : 14.7 kg Dimensions (L x W x H): 506 x 270 x 5 mm	KRESS	1	pcs
	Electric Reel 415 VAC 3 phase - 240 VAC 1 phase Auto Loopback Thermoplastic Cable 4 socket outlet 240 VAC 3 pcs 380 VAC 1 pcs	ZECA / Italy	1	pcs
	Hydraulic & Pneumatic Jack Folding Arm Mobile Jack Lifting Capacity: 40/25 tons Min. Height: 180 mm Mak. Height: 273 mm Lifting Distance: 40 / 85-25 / 80 mm Weight: 58 kg	GEMESA / Turkey	1	pcs
	Jack Stand Capacity: 6 / 12 Ton. Lifting Height: 450 / 600 mm.	ATEK / Turkey	2	pcs
	Mono Trail Crane Capacity 1500 Kg. Chain 5 mt.	ATLAS / Kore	1	pcs
	Bench Vice Size : 100 mm Jaw Width : 100 mm Total Lenght : 300 mm Arvil Size : 40x60 mm Vice Heaighy : 110 mm	GAMA / Turkey	1	pcs

Equipment	Explanation	Brand / Orjin	Quantity	
	Lighting Body : Polycarbonate RAL 9003 body , Metal lock clip Diffuser: Polycarbonate opal cover Light Source: Mid Power LED Consumption Power: 28 W / 38 W / 55 W Input Voltage: 220-240V AC 50/60 Hz CRI: >80 IP Value: IP65 Usage: Surface Mounted	EAE / Turkey	8	pcs
	Outdoor Lighting 240 Watts: 5800 Lumens Long: 30 Cm Working life: 30,000 hours Standard: IP67	ALURA / Turkey	6	pcs
	Control panel of all equipment. Generator / Mains power connection.	ALURA / Turkey	1	pcs
	Fire extinguisher Capacity: 6 kg. Full Weight: 9.1 kg. Working Pressure: 18 bar. Discharge Time: 14 sec. Extinguishing Agent: MAP@ (ABC)	ALURA / Turkey	2	pcs
	Pressure Regulator Air Inlet: 1/2 inch Filter : 20U Working Pressure : 05-9.9 Atu Working temperature : 5-60 ° C Water Capacity : 80 MI Air Permeability : 2200Lt / Dk	OSAKA / Japan	1	pcs
	Compressed air line installation. Polyurethane Pneumatic fittings	ALURA / Turkey	1	set
	Compressed air line installation. Polyurethane Pneumatic hose 10 mm.	ALURA / Turkey	1	set

Equipment	Explanation	Brand / Orjin	Quantity	
	304 Piece Tool Set			
	Combination Wrench Set 1			
	Combination Wrench Set 1			
	Double Open End Wrench Set 1			
	Double Ring End Wrench Set 1			
	1/4" Drive Socket and Hex Key Set 1			
	1/2" Drive Socket Set (C21-12 Ratchet) 1			
	Drive Deep Socket Set 1			
	Drive TORX/Hex/XZN Socket Bits Set 1			
	C-PLUS Slotted/PH Screwdriver and Bit Set 1			
	C-PLUS TORX Screwdriver Set 1		1	pcs
	T-Handle and Ballpoint L Hex Key Set 1			
	DuoTech Pliers Set (Polished Finish) 1			
	Pliers and Adjustable Wrench Set 1			
	Circlip Pliers Set 1			
	Precision Pliers and Screwdriver Set 1			
	Measuring and Cutting Tool Set 1			
	Standard and Needle File Set 1			
	Hammer and Chisel Set 1			
	Drill Bit and Impact Screwdriver Set 1			
	Hand Riveter Set			