











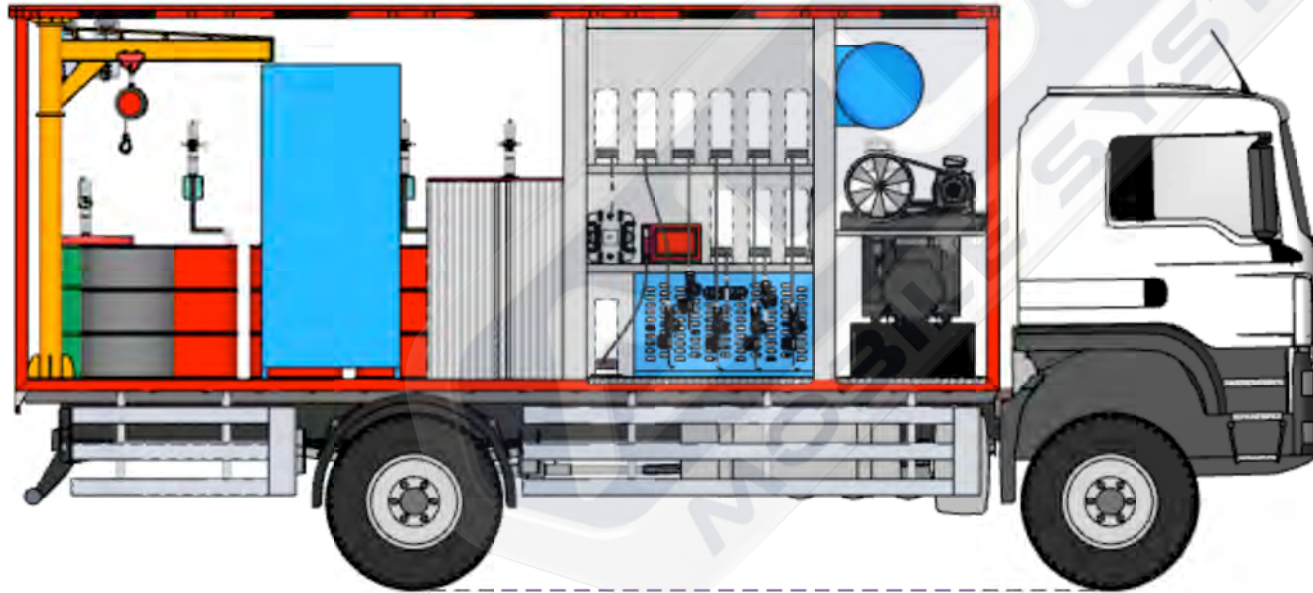


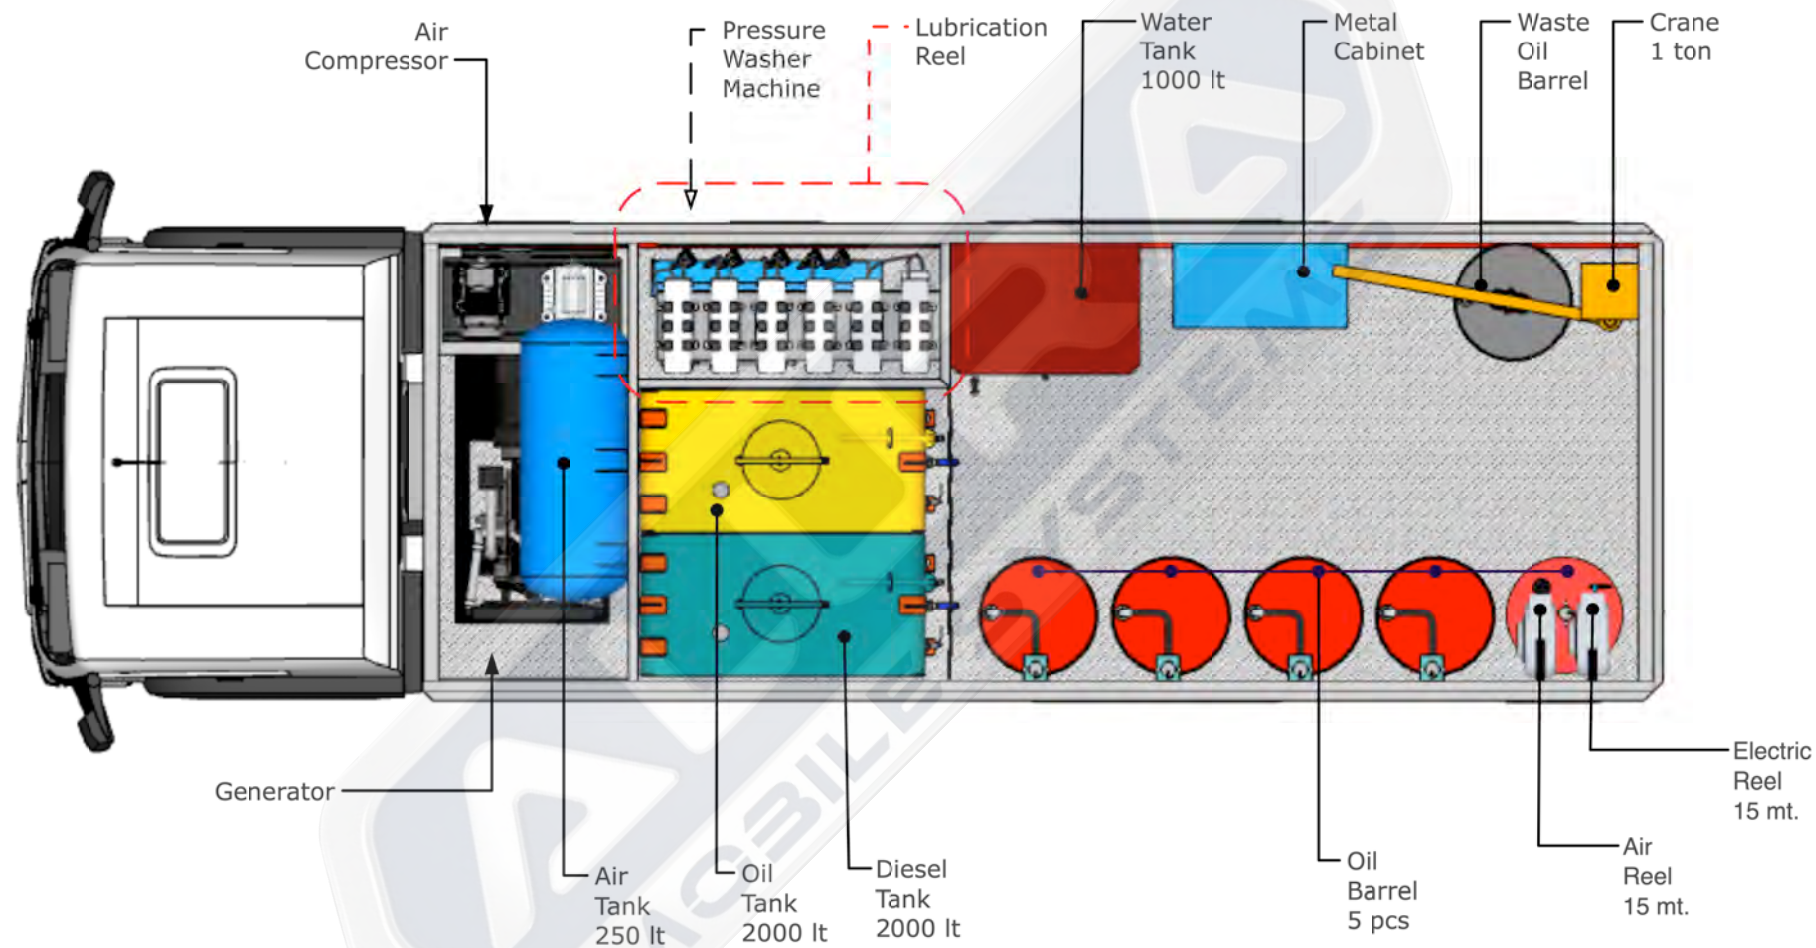




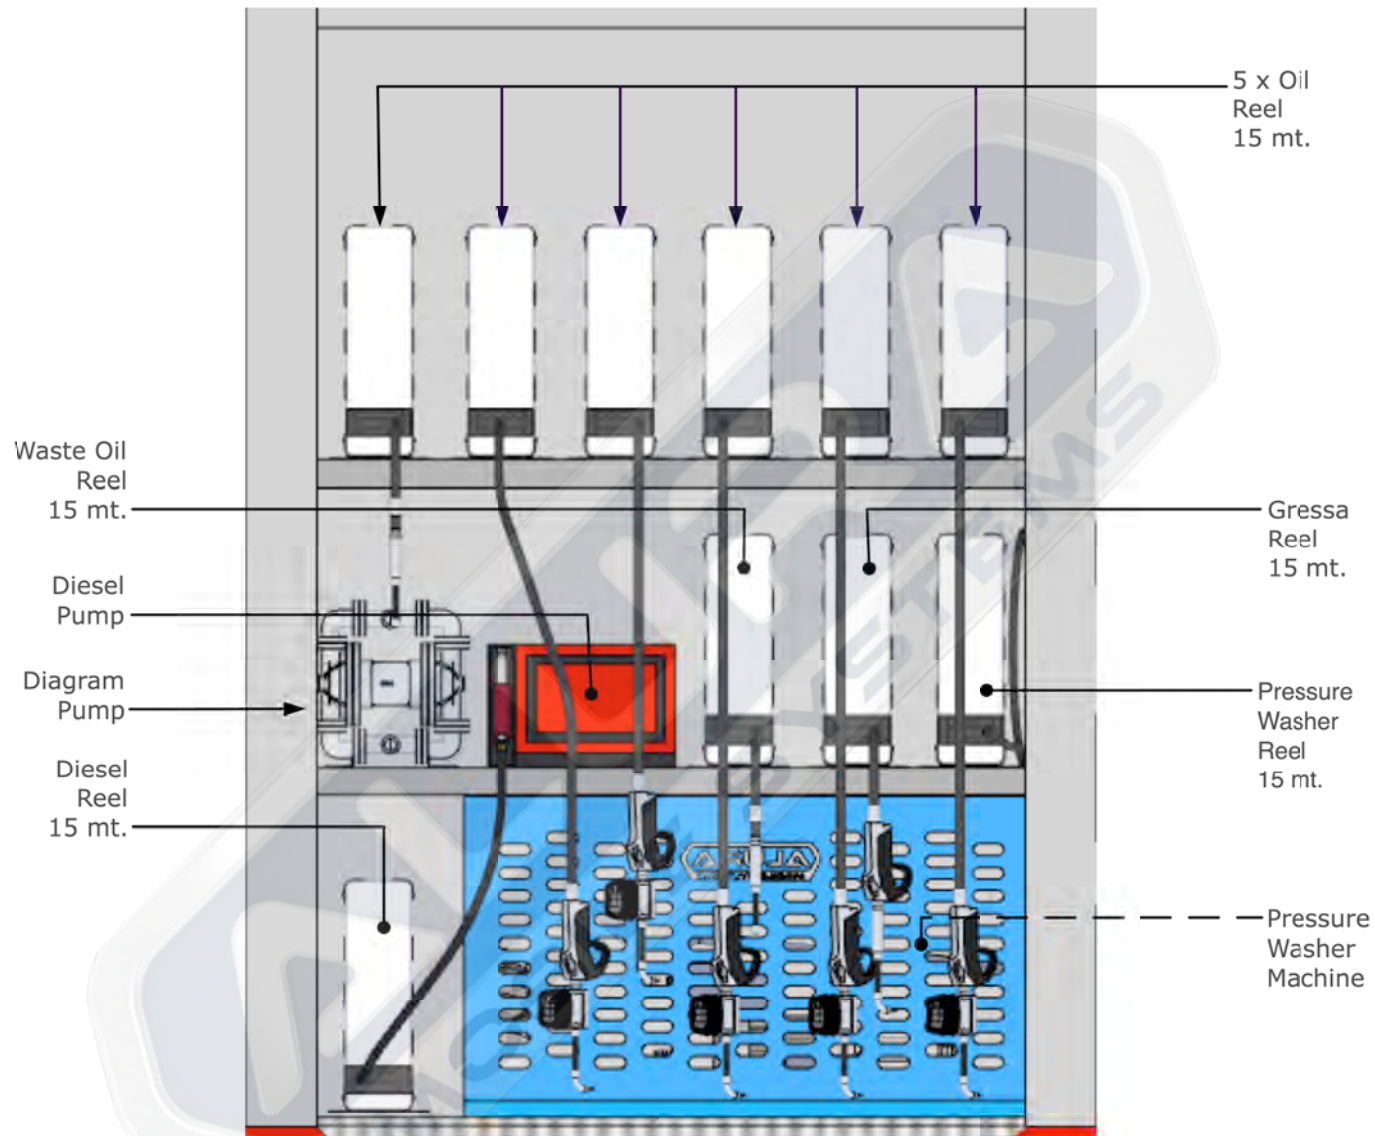


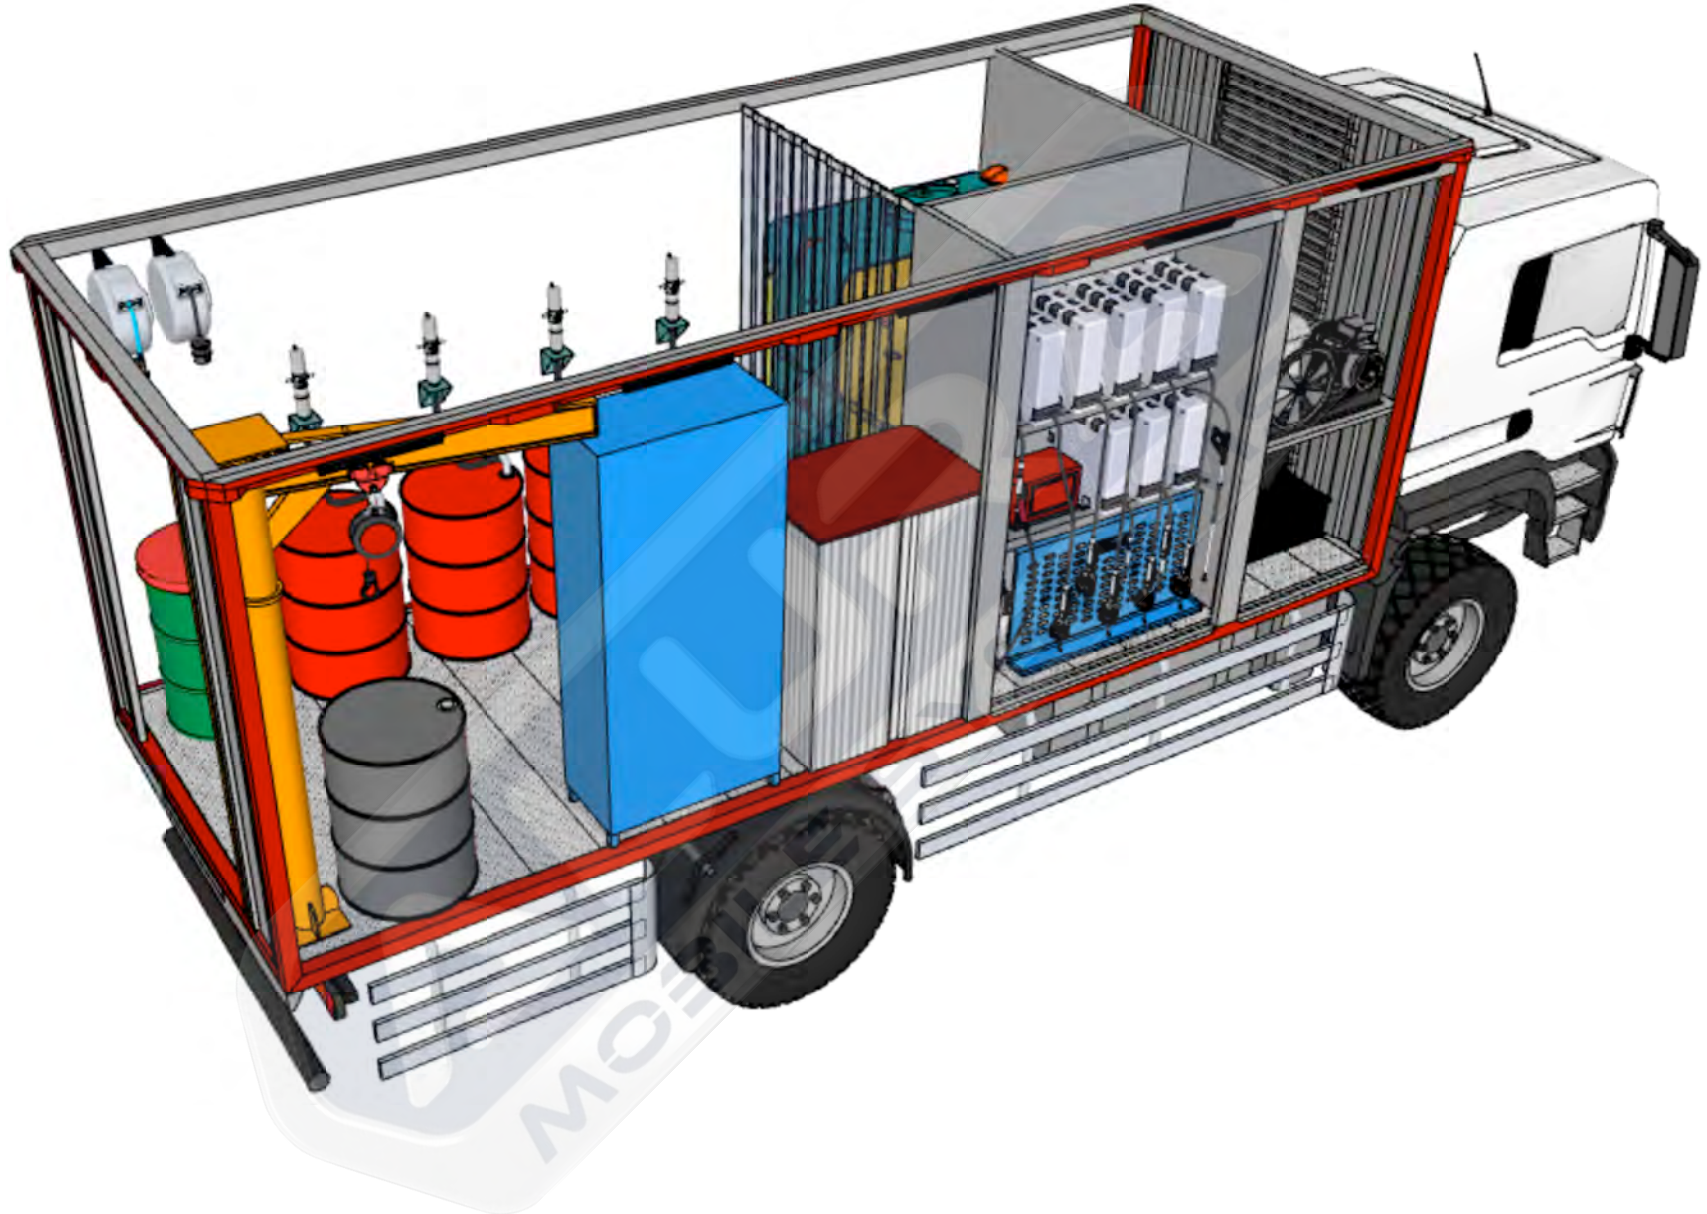


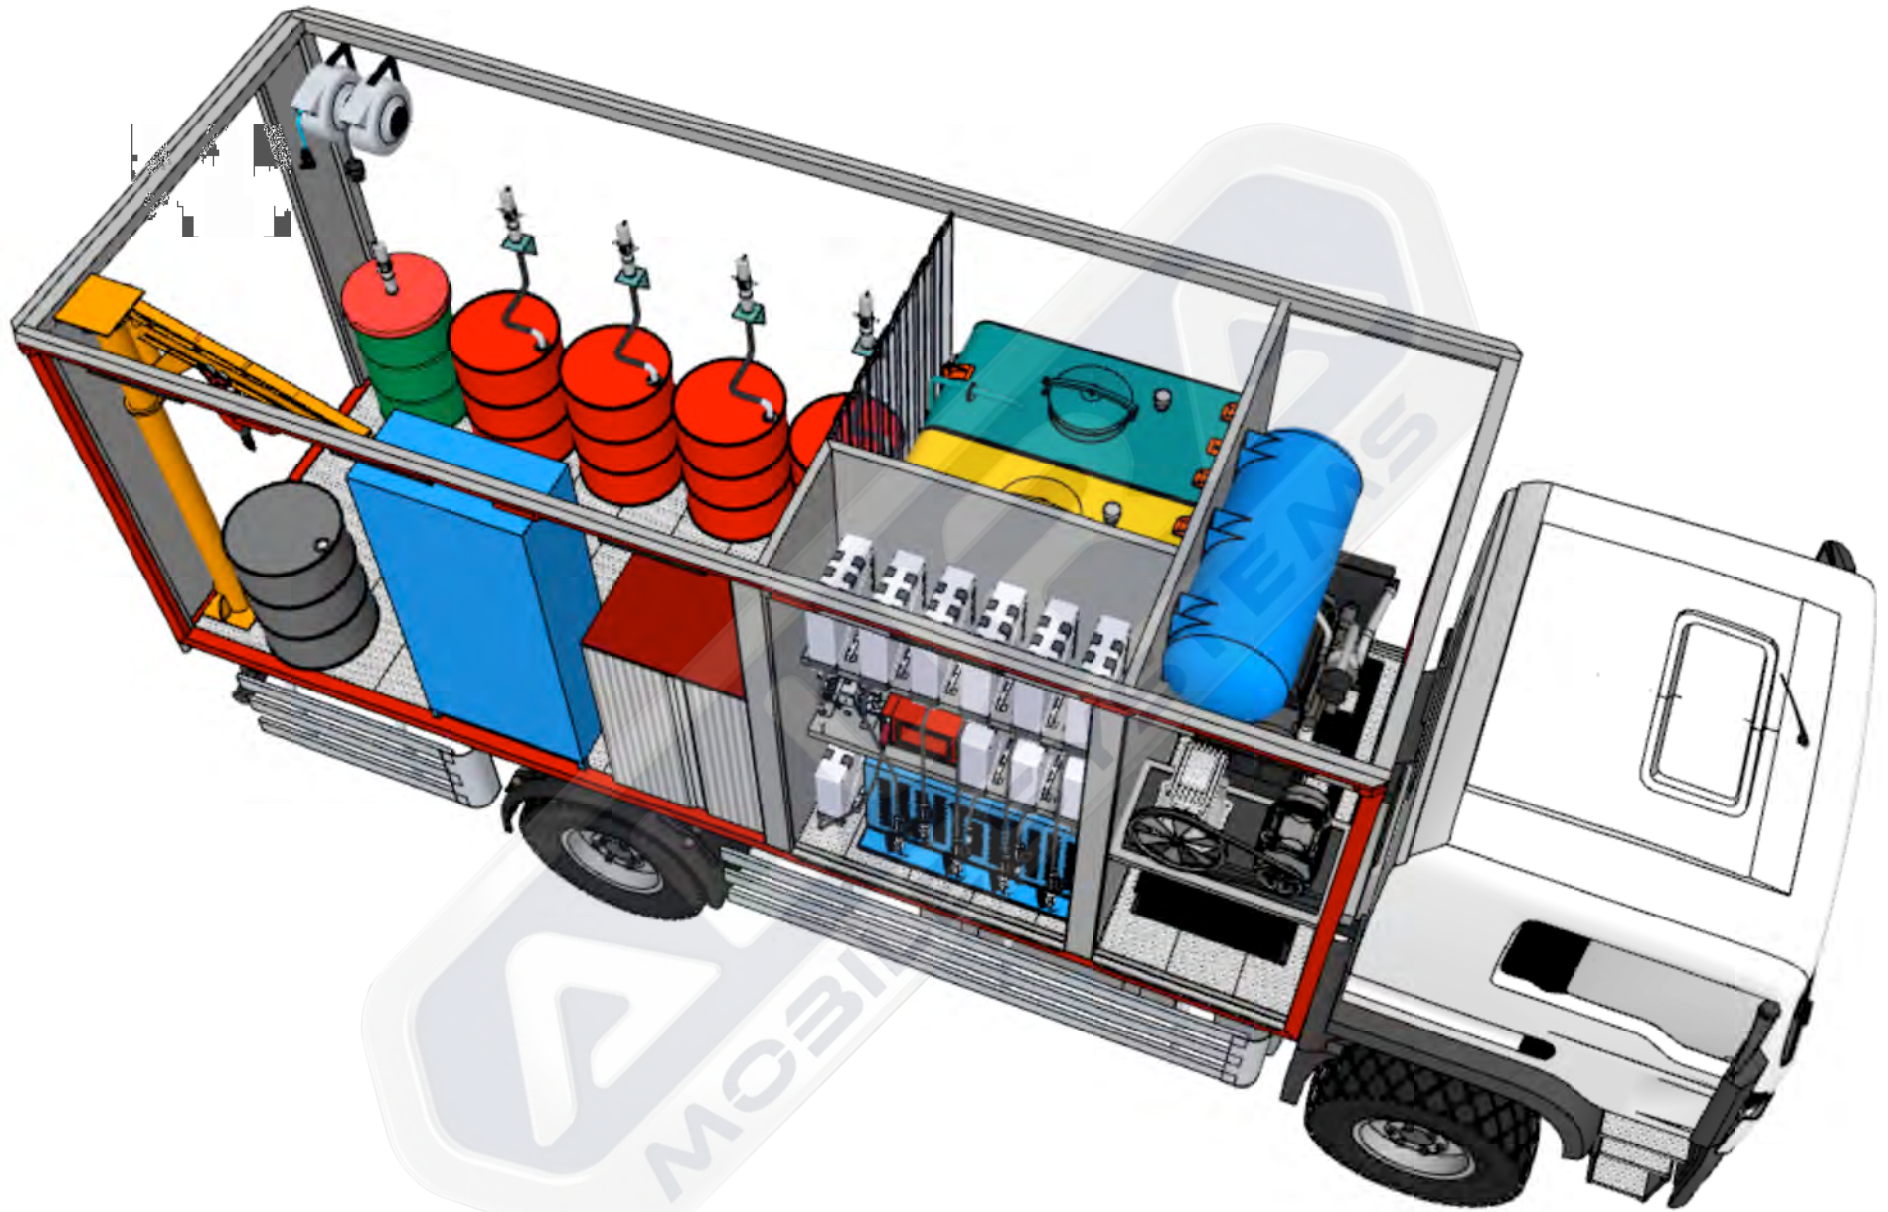



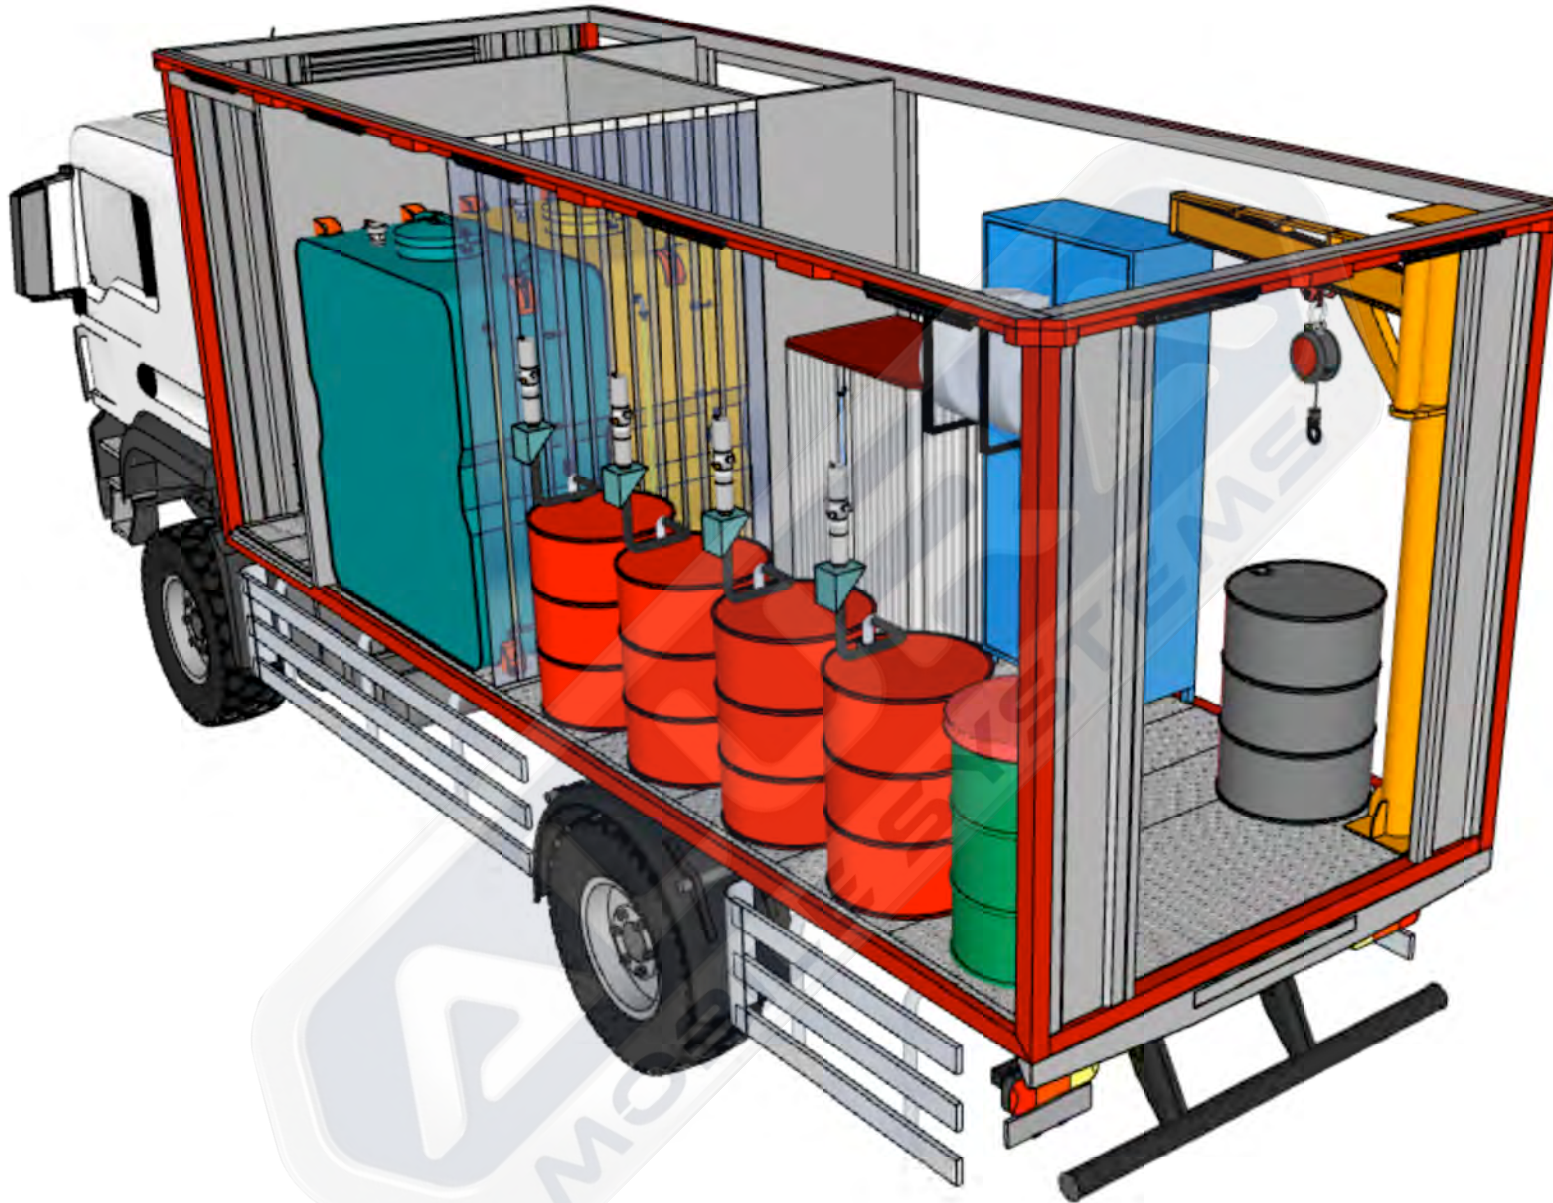

No	Equipment	Referans	Brand	Orijin	Piece		
1	Mobile Lubrication Service	26.082	Alura	Turkey	1		
							
Dimensions / mm.		Length	6.500	Width	2.450	Height	2.500
Bodywork							
MWS bent C type channel steel. Column sheets 3 mm. Panels 2 mm. Base cross members 80mm height 3mm. Base 18 mm Plywood. Sliding windows to usable areas. Stainless hinges and locks.					Sliding glass rear door. Monolithic crane connection channel to the body frame. Acrylic industrial chassis paint. Quick access rear bumper drawers. Metal parts are fixed to the chassis.		
Outer Covering							
Polyurethane Industrial Coating Resistant to chemicals. Hygienic, mold-proof, rust-proof and corrosion-proof. Retains its elasticity between 40C/200 C. Fire resistant CLASS A certificate.					Solvent-free, superior water resistance. Prevents damage that may occur as a result of impact. CE certified.		
Insulation							
Elastomeric Rubber Edges, Ceiling 18/40 mm. Provides high performance thermal insulation with its low thermal conductivity structure. Has a high water vapor diffusion					Used in system solutions with high condensation risk. Increases energy amount. Protects against pressure fluctuations. Unaffected by mold and microorganisms, antimicrobial.		
Control Panel							
Center control panel. Generator and compressor areas are quickly accessible cover. Electrical cables are hidden inside the insulated chassis. Cables in protective plastic sheath.					Polyurethane hose in air line duct. Mains Electricity Connection Input. Perimeter and interior lighting 220v.		
Finishing							
							

No	Equipment	Picture	Specifications	Reference	Brand	Orijin	Pcs
2	Generator Diesel 33 kVa/ 26,4 kW		Prime: 30 kVa / 24 kW Voltage: 400/230 V Phase : 3 Ph. Engine Bran: Perkins Engine Model: 404A-22G1 Alternator: Leroy Somer RPM: 1500 rpm.	FP 33	Full Genset	Turkey	1
3	Pistone Compressor 11 bar.		Engine Power: 5.5 hp Air Intake: 657 lt/min Revolution : 950 rpm Pressure : 11 bar Working Power : 380 V	AB6000	Abac	Italy	1
4	Air Tank 250 lt.		Capacity : 250 lt. Working Pressure: 15 bar. Test Pressure: 16 Bar. Sheet Thickness: 4 mm. Compressor Con. : 1" Air Outlet : 1"	ALR4 50/250	Alura	Turkey	1
5	Metal Cabinet & Drawers		Width: 1000 mm Depth: 500 mm Height: 2000 mm Color: RAL 7035-5015 Drawers: 3 units Shelves: 6 units	6230	Kocel	Turkey	1
6	Oil Pump		Pneumatic pumps for oil Flow rate: 18 l / min Air working pres.: 6/8 bar Av. air con.: 230 l / min Noise level: 81 dB Oil viscosity: 80 SAE	36096	Raasm	Italy	5
7	Oil Reel 15 mt.		Pressure: 150 bar Length: 15 mt Compatible fluids: Oils Material: Painted Steel Inlet-Outlet : G 1/2-G 1/2 Pressure-Size:1/2"160 bar	9430.430	Raasm	Italy	5

No	Equipment	Picture	Specifications	Reference	Brand	Orijin	Pcs
8	Oil Gun		Flu: Technopolymer Digital meter: Yes Inlet swivel joint: G 1/2 f Filter: Yes Level locking button: Yes	37758	Raasm	Italy	5
9	Oil Tank 2000 lt.		Volume: 2000 lt Metal prism tank Occupancy indicator Filler caps Pump stabilizer Discharge 1" valve	ALR22500	Alura	Turkey	1
10	Waste Oil Diagram Pump		Flow rate: 70 l / min Max pressure: 8 bar. Max cic. for min.: 400cpm. Max working temp.: 100°C Noise level: 70 dB. Air working pressure: 2/6 Bar.	33.2011TP T2	Raasm	Italy	1
11	Waste Oil Hose Reels 15 mt.		Pressure: 20 bar Length: 15 mt Compatible fluids: Oils Material: Painted Steel Inlet-Outlet : G 1/2 - G 1/2 Pres. Size: 1/2"-160 bar	9430.104	Raasm	Italy	1
12	Waste Oil Pan		Capacity: 15 liters. HDPE Plastic Diameter: 570 mm. Height: 120 mm. Weight: 1,075 gr. Impact resistant.	1500-9980	Brio	Germa	1
13	Grease Lubrication Kit		Grease disp. kit Ratio: 50:1 Flow rate: 1500 g/min Av. air conmsp.: 330 l/min Noise level: 81 dB Weight: 4.6kg Grease guns	64195	Raasm	Italy	1

No	Equipment	Picture	Specifications	Reference	Brand	Orijin	Pcs
14	Grease Reel 15 mt.		Pressure: 400 bar. Hose Length: 15 mt. Compatible fluids: Water Swivel joint: Stainless Metal Characteristic: Fixed Material: Painted steel	995.518	Raasm	Italy	1
15	Diesel Pump		Flow rate: 45 lt/min Power: 220 V Suction distances: 50 mt. Pressing distances: 30 mt. Gun : Automatic fuel gun.	Cube 56	Piusu	Italy	1
16	Diesel Reel 15 mt.		Pressure: 20 bar. Hose: 15 mt Compatible fluids: Diesel Seals: Polyurethane Material: Painted steel Inlet - Outlet: G 1" - G 1"	8540.603	Raasm	Italy	1
17	Diesel Tank 2.000 lt.		Material: ST 37 Carbon Steel Capacity: 2,000 lt. Sheet Thickness: 4 mm Fuel Output: 1 inch Level indicator Manhole Covers: 600 mm	ALR222000	Alura	Turkey	1
18	Pressure Washer Machine 200 bar.		Pressure: 200 bar Flow rate: 900 lt/hour Engine Power: 7.5 hp Voltage - Ph. 380V-3 Ph. Weight: 74 Spray gun	ST200CS	Rottest	Turkey	1
19	Washing Reel Hot 15 mt.		Pressure: 400 bar. Hose Length: 15 mt. Compatible fluids: Water Swivel joint: Stainless Metal Characteristic: Fixed Material: Painted steel	995.518	Raasm	Italy	1

No	Equipment	Picture	Specifications	Reference	Brand	Orijin	Pcs
20	Water Pump		Voltage: 160-240V/160W Output Current: 4.0A Max. Pressure : 35 m Max. Flow: 2.5 m ³ /hour Max. Suction Power: 9 m Insulation: Class H	SNC35	Sincontrol	Turkey	1
21	Water Tank 1.000 lt.		Capacity : 1000 Ltr Made of Stainless : 2 mm Level Indicator : Manuel Filling tap : 1" Pump stabilizer : 1" Discharging valve : 1"	ALR21500	Alura	Italy	1
22	Cable Reel 15 mt.		Three Phase : 400 Volt Cable Thickness: 5x2.5mm Cable Length: 20 Mt H07RN-F Power : 1000-3000 W Auto Rewind Weight: 8.3 Kg	820722	Mavel	Italy	1
23	Air Reel 15 mt.		Hose Length: 15mt. 10x15mm Working Pressure: 15 Bar Inlet and Outlet Dim.: 3/8" Automatic Rewind Steel swivel wall bracket Weight: 8.3 Kg	880100	Mavel	Italy	1
24	Aluminum Shutters		Manuel Working Locking Systems Size : 110x230 cm 2 pcs. 125x230 cm 1 pcs.	CLK100230	Celiksan	Turkey	3
25	Outdoor Lighting		Operating : DC 24/15V Current strength: 1.4 A Light Source: 3W 12pcs. LENS Feature: 25° LENS White:5000-7000K Polycarbonate plastic black aluminum profile	CSR24.800	CSR	Turkey	10

No	Equipment	Picture	Specifications	Reference	Brand	Orijin	Pcs
26	Indoor Lighting		Body : Polycarbonate RAL 9003 body , Metal lock clip Polycarbonate opal cover Light : Mid Power LED Power: 55 W Input Voltage: 220-240V - IP 65	CA59003	CTN	Turkey	4
27	Air Regulator		Air Inlet : 1/2" Filter : 20u Working Pres.: 05-9.9 atu Operating Temp.: 5-60°C Water Capacity: 80 ml Air Permeability: 2200 lt/min	OPT3042FR	Osaka	Japan	1
28	Crane 1 ton		Capacity: 1 Ton Lifting Height: 5 mt. Chain Thickness: 6 mm. Test Load: 1,250 kg. Weight: 11.8 kg.	ATCK 13	Atlaspro	Turkey	1
29	Fire Extinguisher		ABC Grade Fire Ext. Powder 6 Kg Capacity MAP Rate 40% Body made of A1 7114 Quality Plastered Sheet 18 Bar Working Pressure Mic.Electro Static Paint.	STR1806	Star	Turkey	2



No	Equipment	Reference	Brand	Orijin	Piece
1	Mobile Lubrication Service	26.082	Alura	Turkey	1
2	Generator Diesel 33 kVa/ 26,4 kW	FP 33	Full Genset	Turkey	1
3	Pistone Compressor 11 bar.	AB6000	Abac	Italy	1
4	Air Tank 250 lt.	ALR450/250	Alura	Turkey	1
5	Metal Cabinet & Drawers	6230	Kocel	Turkey	1
6	Oil Pump	36096	Raasm	Italy	5
7	Oil Reel 15 mt.	9430.430	Raasm	Italy	5
8	Oil Gun	37758	Raasm	Italy	5
9	Oil Tank 2000 lt.	ALR22500	Alura	Turkey	1
10	Waste Oil Diagram Pump	33.2011TPT2	Raasm	Italy	1
11	Waste Oil Hose Reels 15 mt.	9430.104	Raasm	Italy	1
12	Waste Oil Pan	1500-9980	Brio	Germa	1
13	Grease Lubrication Kit	64195	Raasm	Italy	1
14	Grease Reel 15 mt.	995518	Raasm	Italy	1
15	Diesel Pump	Cube 56	Piusu	Italy	1
16	Diesel Reel 15 mt.	8540.603	Raasm	Italy	1
17	Diesel Tank 2.000 lt.	ALR222000	Alura	Turkey	1
18	Pressure Washer Machine 200 bar.	ST200CS	Rottest	Turkey	1
19	Washing Reel Hot 15 mt.	995518	Raasm	Italy	1
20	Water Pump	SNC35	Sincontrol	Turkey	1
21	Water Tank 1.000 lt.	ALR21500	Alura	Italy	1
22	Cable Reel 15 mt.	820722	Mavel	Italy	1
23	Air Reel 15 mt.	880100	Mavel	Italy	1
24	Aluminum Shutters	CLK100230	Celiks	Turkey	3
25	Outdoor Lighting	CSR24.800	CSR	Turkey	10
26	Indoor Lighting	CA59003	CTN	Turkey	4
27	Air Regulator	OPT3042FRL	Osaka	Japan	1
28	Crane 1 ton	ATCK 13	Atlaspro	Turkey	1
29	Fire Extinguisher	STR1806	Star	Turkey	2